



Product Handbook

Conveyor Belt Splicing Systems

November 2010



2525 Wisconsin Avenue, Downers Grove, Illinois 60515

Phone: 1-630-971-0150 Fax: 1-630-971-1180

Customer Service: 1-800-541-8028

www.flexco.com

Table of Contents

CLIPPER® WIRE HOOKS	4-24
Clipper® Wire Hook Fastening System Overview	4
General Hook Information	5
Clipper Hook and Pin Selection Chart.....	6
Clipper Carded Hooks.....	7-14
Unibar® Series Hooks.....	15-16
Connecting Pins	17-19
Lacers	20-24
ALLIGATOR® CONVEYOR BELT LACING	25-28
Alligator® Lacing Fastening System Overview	25
Steel Lacing.....	26
316 Stainless Lacing	27
Hinge Pins	28
ALLIGATOR® TRANSMISSION BELT LACING	29
ALLIGATOR® READY SET™ STAPLE BELT FASTENERS.....	30-34
Alligator® Ready Set Fastening System Overview	30
No. 62, No. 125, No. 187 Staple Fasteners	31
Hinge Pins	32
Installation Tools	33-34
MegAlloy® Staple Fasteners.....	34
ALLIGATOR® RIVET FASTENERS	35-36
Alligator® Rivet Fastening System Overview.....	35
Rivet Fasteners, Hinge Pins, Installation Tools	36
ALLIGATOR® NON-METALLIC FASTENERS.....	37-41
Alligator® Non-Metallic Fastening System Overview.....	37
Fasteners, Hinge Pins	38
Spiral Lacing	39
Installation Tools	38-39
LIGHT-DUTY BELT MAINTENANCE TOOLS	40-41
BELT FABRICATION TOOLS	42-44
Novitool® Overview.....	42
Aero™ Splicing Press.....	43
Ply130™ Separator	44
PunM™ Punch Press.....	44

Table of Contents (cont.)

FLEXCO® BOLT HINGED FASTENERS.....	45-50
Flexco® Bolt Hinged Fastening System Overview.....	45
No. 375X Fasteners.....	46
No. 550.....	47
Hinge Pins	48
Installation Tools	49-50
FLEXCO® RIVET HINGED FASTENERS	51-63
Flexco® Rivet Hinged Fastening System Overview.....	51
Flexco® R2 Medium-Duty Rivet Hinged Fasteners	52
Fasteners	53-54
Rivets, Hinge Pins.....	55-59
Installation Tools	60-63
FLEXCO® SOLID PLATE FASTENERS	64-68
Flexco® Solid Plate Fastening System Overview.....	64
Fasteners	65
Installation Tools	66-67
Extra bolts and Nuts, Rip Repair	68
FLEXCO® RIVET PLATE FASTENERS.....	69-74
Flexco® Rivet Solid Plate Fastening System Overview	69
Fasteners, Rivets.....	70-71
Installation Tools	72-74
ALLIGATOR® V-BELT FASTENERS	75-76
Alligator® V-Belt Fastening System Overview.....	75
Fasteners, Tools.....	76
HEAVY-DUTY BELT MAINTENANCE AND SAFETY TOOLS.....	77-79
Tools and Accessories	77
Belt Cutters.....	78
Belt Clamps, Belt Skiver, Belt Lifter.....	79
BELT CONVEYOR PRODUCTS	80-82
Belt Positioner™	80
Belt Plows.....	81
Skirt Clamps	82
TATCH-A-CLEAT® BELT CLEATS	83-89
General Cleat Information.....	83
Mechanical Cleats	84-85
Bondable Cleats.....	86-89
INDEX	90-101
By Ordering Number	90-93
By Item Code.....	94-101



How Clipper® Hooks Work

The Clipper® Hook design incorporates a double-staggered grip pattern that gives wire hooks exceptional holding power without degrading the integrity of the belt carcass. The points of the fastener pass through the belt carcass and are formed over, locking the carcass between them.

This low profile splice is highly compatible with conveyor components and compliant with the need for reduced operating noise. Additional splice strength and consistency of splice installation is obtained through precision machine application.

Applications	Installation Method	What You Need for Installation
- Package and Parts Handling - Food Processing - Checkout Counters - Commercial Laundries - Filter Media - Agriculture	Depending on the application, Clipper® Hooks can be installed with on-site maintenance lacers such as the Roller Lacer®, Roller Lacer® Gold Class™, or Microlacer®, Production Lacers for high volume lacing (Pro 400, Pro 600, Pro 6000, or Electric Hydraulic Lacers), or Specialty Lacers such as the Plier-Tape Lacer, Vice Lacer, Baler Belt Lacer. Please contact Flexco to discuss your application.	- Hooks - Connecting Pin - Installation Tool
How to Specify the Correct Clipper® Fastener	Fastener Metal Selection	Hinge Pin Selection
1. Measure your Belt Thickness (PIW). 2. Measure the Diameter of the Smallest Pulley in your Drive with Belt Wrap more than 90°. 3. Using the selection chart on page 6, identify possible hook choices. 4. Narrow selections by selecting desired wire diameter. • Larger wire diameter provides greater strength and abrasion resistance. • Smaller wire diameter provides less noise and less wear on conveyor components. 5. If multiple choices remain, select either carded or Unibar® style fastener.	Galvanized Steel. For basic applications, galvanized steel is recommended. Stainless Steel. Type 430 and Type 316 Stainless Steel offers more resistance than steel to abrasion, acids, chemicals, rusting, and magnetic attraction. High Tensile. Added abrasion resistance and fastener retention strength. Specialty Metal. • Coated Steel • Rectangular High Tensile • Monel® • Inconel® • Phosphor Bronze • Hastelloy • Black Oxide	DSS DuraStainless™ - stainless spring steel core with filled nylon coating for superior abrasion resistance, flat belts only. DL Duralink™ - braided stainless cable with filled nylon coating for superior abrasion resistance, crowned pulley or troughed belts. NY Nylosteel - spring steel core with nylon coating for use with galvanized or high tensile fasteners, flat or troughed belts. NYS Nylostainless - stainless spring steel core with nylon coating for use with stainless steel fasteners, flat belts only. NCS Nylon Covered Stainless Steel Cable - braided stainless cable with nylon coating for applications with stainless fasteners, crowned pulley or troughed belts.

Please see page 6 for Clipper Fastener selection chart.

General Hook Information



HOW TO SELECT THE PROPER HOOK SIZE


1. Measure the belt thickness and pulley diameter.
2. Determine the possible options that could be used, based on the chart on page 6.
3. Select the proper hook from the specification chart.
4. If hook specifications overlap into more than one size, select the fastener which best meets your needs. NOTE: If maximum strength is of primary importance, choose the hook with the largest diameter wire. If low profile is needed select the hook with the smallest diameter wire.
5. Select the type of metal which best fits your application requirements.

SPECIAL LENGTH CARDS

Clipper® hooks can be ordered in special length cards or Unibar® strips for specific applications. This eliminates time consuming card cutting by hand.

All special length cards are shipped without pins.

Please call Customer Service for pricing and lead times.

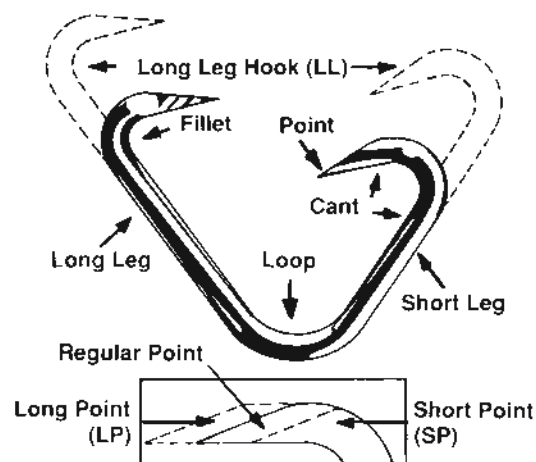

FASTENER MATERIAL CHARACTERISTICS

METAL	MAGNETIC	ABRASION RESISTANCE	CHEMICAL RESISTANCE	RUST RESISTANCE	SPARKING/ NON-SPARKING	AVAILABLE CLIPPER SIZES
Galvanized	Yes	Good	Poor	Good	Sparking	25, 1, 2-7
Coated Steel	Yes	Good	Poor	Poor	Sparking	U2 -U3
Steel	Yes	Good	Poor	Poor	Sparking	U4-U7
High Tensile Steel	Yes	Good to Excellent	Fair	Good	Sparking	1, 2-7
Rectangular High Tensile Steel	Yes	Good to Excellent	Fair	Good	Sparking	4-1/2
430 Stainless Steel	Yes	Good	Fair to Good	Good	Sparking	1, 2-7, UX-1, U2SP - U7
316L Stainless Steel	Slightly	Good	Good to Excellent	Excellent	Sparking	25, 30, 36, 1, 2-7, UX-1, UCM36, UA2, UA3
Monel® 400	Slightly	Fair	Excellent	Excellent	Sparking	25, 1, 2-4
Inconel® 600	No	Fair	Excellent	Excellent even at elevated temp.	Sparking	2-4
Phosphor Bronze	No	Good	Poor	Good	Non-sparking	2-4
Hastelloy C-22	No	Good	Excellent	Excellent	Sparking	36, UCM
Black Oxide	Yes	Good	Poor	Fair	Sparking	25



Clipper® Hook and Pin Selection Chart

FASTENER AND PIN SIZE SELECTION CHART													
Minimum Pulley Diameter	Wire Diameter	Connecting Pin Size	Belt Thickness										
			Up to .047" 3/64"	.063" 1/16"	.093" 3/32"	.125" 1/8"	.156" 5/32"	.187" 3/16"	.219" 7/32"	.25" 1/4"	.281" 9/32"	.313" 5/16"	.343" 11/32"
			1.2mm	1.6mm	2.4mm	3.2mm	4.0mm	4.8mm	5.6mm	6.4mm	7.1mm	7.9mm	9.0mm
15/16" 24mm	.025"	.065"/1.7mm	25SP*										
	.025"	.065"/1.7mm	25										
	.036" x .027"	.065"/1.7mm	UCM36SL XSP										
	.036" x .027"	.065"/1.7mm		UCM36SL SP									
	.025"	.065"/1.7mm		25LP*									
2" 51mm	.036" x .027"	.065"/1.7mm	UCM36 XSP										
	.030"	.065"/1.7mm	30*										
	.036" x .027"	.065"/1.7mm		UCM36 SP*									
	.036" x .027"	.065"/1.7mm		36 SP*									
	.040"	.065"/1.7mm		1 XSP*									
	.030"	.065"/1.7mm		30P*									
	.040"	.065"/1.7mm		UX-1 SP*									
	.036" x .027"	.065"/1.7mm		UCM36*									
	.036" x .027"	.065"/1.7mm		36*									
	.040"	.065"/1.7mm		1 SP*									
	.036" x .027"	.065"/1.7mm			UCM36 LP*								
	.040"	.065"/1.7mm			1*								
	.040"	.065"/1.7mm			UX-1*								
	.047"	.093"/2.4mm			UA2								
	.054"	.093"/2.4mm			U2 SP								
	.054"	.093"/2.4mm			2SP								
	.054"	.093"/2.4mm				U2							
	.054"	.093"/2.4mm				2							
	.047"	.093"/2.4mm				UA3							
3" 76mm	.054"	.093"/2.4mm				U3-1							
	.054"	.093"/2.4mm				3-1							
	.054"	.093"/2.4mm					U3-2						
	.054"	.093"/2.4mm					3						
	.054"	.093"/2.4mm					U3						
	.054"	.093"/2.4mm						3-4 1/2					
4" 102mm	.054"	.109"/2.8mm					4-2						
	.054"	.125"/3.2mm						4 1/2-3					
	.054"	.109"/2.8mm						4					
	.054"	.109"/2.8mm						U4					
	.054"	.125"/3.2mm							4 1/2				
5" 127mm	.054"	.125"/3.2mm									5		
	.054"	.125"/3.2mm									U5		
6" 152mm	.054"	.156"/4.0mm										6	
	.054"	.156"/4.0mm										U6	
7" 175mm	.054"	.156"/4.0mm											7
	.054"	.156"/4.0mm											U7

*Long Leg available. Allow for 1" (25mm) larger minimum pulley diameter.

Hook Abbreviations: SL – Short Leg XSP – Extra Short Point LP – Long Point
LL – Long Leg SP – Short Point

Clipper® Regular (54) Series Carded Hooks



FASTENERS

GALVANIZED - 12" LENGTHS

2-7	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	WITHOUT PINS						
	2SP	2SPG	02168	1.2	84	12	144
	2	2G	02154	1.2	84	12	144
	3-1	3-1G	02196	1.3	84	12	144
	3	3G	02182	1.3	84	12	144
	3-4-1/2	3-4-1/2G	02206	1.3	84	12	144
	4	4G	02216	1.4	84	12	144
	4-2	4-2G	02232	1.4	84	12	144
	4-1/2	4-1/2G	02300	1.5	84	12	144
2-7	WITH PINS						
	2SP	2SPGNY	02169	1.2	84	12	144
	2	2GNY	02155	1.2	84	12	144
	3-1	3-1GNY	02197	1.3	84	12	144
	3	3GNY	02183	1.3	84	12	144
	3-4-1/2	3-4-1/2GNY	02210	1.3	84	12	144
	4	4GNY	02217	1.4	84	12	144
	4-2	4-2GNY	02233	1.4	84	12	144
	4-1/2	4-1/2GW	02301	1.4	84	12	144
	5-3	5-3GW	02340	1.8	84	12	144
2-7	5	5GW	18227	1.8	84	12	144
	6	6GW	18228	2.2	84	12	144
	7	7GW	02365	2.3	84	12	144

NOTE: For Regular (54) Series Carded Hooks, wire diameter = .054" (1.4mm).

For extra pin material see pages 17-19.

HIGH TENSILE - WITHOUT PINS - 12" LENGTHS

2-6	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	2SP	2SPHT	02173	1.2	84	12	144
	2	2HT	02161	1.2	84	12	144
	3-1	3-1HT	02198	1.3	84	12	144
	3	3HT	02189	1.3	84	12	144
	3	3HT-WIDE	05362	1.3	84	12	144
	4	4HT	02223	1.4	84	12	144
	4-2	4-2HT	02295	1.4	84	12	144
	4-1/2-3	4-1/2-3HT	02316	1.4	84	12	144
	4-1/2	4-1/2HT	02307	1.5	84	12	144
2-6	5-3	5-3HT	02342	1.8	84	12	144
	5	5HT	02330	1.8	84	12	144
	6	6HT	02355	2.2	84	12	144

RECTANGULAR HIGH TENSILE - WITHOUT PINS - 12" LENGTHS

4-1/2	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	4-1/2-3	4-1/2-3RHTX	02432	2.3	84	12	144
4-1/2	4-1/2	4-1/2RHTX	02429	2.3	84	12	144

CLIPPER® ORDERING NUMBER REFERENCE

XSP	Extra Short Point
SP	Short Point
LP	Long Point
XLP	Extra Long Point
LL	Long Leg
SL	Short Leg
G	Galvanized
HT	High Tensile
RHTX	Rectangular Wire
S	430 Stainless Steel
SS	316 Stainless Steel

Stock Items (non-shaded) standard lead time is 3 working days.

Made To Order Items (shaded) extended lead time, minimum order may apply.

Special Metals and Special Length Cards are available.
Request quote for price and delivery.



Clipper® Regular (54) Series Carded Hooks

FASTENERS

430 STAINLESS - 12" LENGTHS

2-7	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	WITHOUT PINS						
	2SP	2SPS	02170	1.2	84	12	144
	2	2S	02157	1.2	84	12	144
	3-1	3-1S	02195	1.3	84	12	144
	3	3S	02185	1.3	84	12	144
	4	4S	02219	1.4	84	12	144
	4-2	4-2S	02234	1.4	84	12	144
	4-1/2	4-1/2S	02303	1.5	84	12	144
	5-3	5-3S	02341	1.8	84	12	144
	5	5S	02326	1.8	84	12	144
	6	6S	02351	2.2	84	12	144
	7	7S	02367	2.3	84	12	144
	WITH PINS						
	2SP	2SPSNYS	02171	1.2	84	12	144
	2	2SNYS	02158	1.2	84	12	144
	3	3SNYS	02186	1.3	84	12	144
	4	4SNYS	02220	1.4	84	12	144
	4-2	4-2SNYS	02294	1.4	84	12	144
	4-1/2	4-1/2-SW	02304	1.5	84	12	144
	5	5SW	02327	1.8	84	12	144
	6	6SW	02352	2.2	84	12	144
	7	7SW	02368	2.3	84	12	144

NOTE: For Regular (54) Series Carded Hooks, wire diameter = .054" (1.4mm).

For extra pin material see pages 17-19.

316L STAINLESS - WITHOUT PINS - 12" LENGTHS

2-7	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	2SP	2SPSS	02172	1.2	84	12	144
	2	2SS	02159	1.2	84	12	144
	3-1	3-1SS	02397	1.3	84	12	144
	3	3SS	02187	1.3	84	12	144
	4	4SS	02221	1.4	84	12	144
	4-1/2	4-1/2SS	02305	1.5	84	12	144
	5	5SS	02328	1.8	84	12	144
	6	6SS	02353	2.2	84	12	144
	7	7SS	02370	2.3	84	12	144

BRONZE - WITHOUT PINS - 12" LENGTHS

2-4	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	2SP	2SPB	02175	1.2	84	12	144
	2	2B	02164	1.2	84	12	144
	3	3B	02193	1.3	84	12	144
	4	4B	02227	1.4	84	12	144

MONEL® - WITHOUT PINS - 12" LENGTHS

2-4-1/2	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	2SP	2SPM	02174	1.2	84	12	144
	2	2M	02163	1.2	84	12	144
	3	3M	02191	1.3	84	12	144
	4	4M	02225	1.4	84	12	144
	4-1/2	4-1/2M	02310	1.5	84	12	144

Clipper® Point-of-Purchase Baler Hooks



POINT-OF-PURCHASE FASTENERS*

BELT WIDTH	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	PINS PER BOX	MIN. ORDER QTY.
#4½ RECTANGULAR HIGH TENSILE							
4"	4-1/2RHTX(26)W-8	01831	1.1	26	8	4	50
6 ½"	4-1/2RHTX(41)W-4	01846	1.1	41	4	2	50
7"	4-1/2RHTX(45)W-4	01847	1.1	45	4	2	50
#4½ - 3 POINT RECTANGULAR HIGH TENSILE							
7"	4-1/2-3RHTX(45)W-4	01848	1.1	45	4	2	50
#4½ - 4 POINT RECTANGULAR HIGH TENSILE							
6 ½"	4-1/2-4RHTX(42)W-4	01849	1.1	42	4	2	50
#3 - 4½ GALVANIZED							
4"	3-4-1/2G(26)W-8	01853	1.1	26	8	4	50
6 ½"	3-4-1/2G(42)W-4	01854	1.1	42	4	2	50
10"	3-4-1/2G(67)-10POP	02209	1.3	67	10	0	25

For extra pin material see pages 17-19.

* **NOTE:** Point-of-Purchase Baler hooks are made to order (shaded) and have a three week lead time. Boxes include pre-cut Duralink™ Pins as indicated.

Stock Items (non-shaded) standard lead time is 3 working days.

Made To Order Items (shaded) extended lead time, minimum order may apply.

Special Metals and **Special Length** Cards are available.
Request quote for price and delivery.

CLIPPER® ORDERING NUMBER REFERENCE

XSP	Extra Short Point
SP	Short Point
LP	Long Point
XLP	Extra Long Point
LL	Long Leg
SL	Short Leg
G	Galvanized
HT	High Tensile
RHTX	Rectangular Wire
S	430 Stainless Steel
SS	316 Stainless Steel



Clipper® 1 (40) Series Carded Hooks

FASTENERS

GALVANIZED - 6" LENGTHS

1 SERIES	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	WITHOUT PINS						
	1XSP (1D)	1XSPG6	02118	0.6	50	24	144
	1SP (1A)	1SPG6	02267	0.6	50	24	144
	1	1G6	02072	0.6	50	24	144
	1LLXSP (1DLL)	1LLXSPG6	02119	0.6	50	24	144
	1LLSP (1ALL)	1LLSPG6	02268	0.6	50	24	144
	1LL	1LLG6	02073	0.6	50	24	144
	WITH PINS						
	1XSP (1D)	1XSPG6NY	02120	0.6	50	24	144
	1SP (1A)	1SPG6NY	02269	0.6	50	24	144
	1	1G6NY	02075	0.6	50	24	144
	1LL	1LLG6NY	02076	0.6	50	24	144

NOTE: For 1 (40) Series Carded Hooks, wire diameter = .040" (1.0 mm).

For extra pin material see pages 17-19.

GALVANIZED - 12" LENGTHS

1 SERIES	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	WITHOUT PINS						
	1XSP (1D)	1XSPG12	02139	0.6	96	12	144
	1SP (1A)	1SPG12	02283	0.6	96	12	144
	1	1G12	02100	0.6	96	12	144
	1LLXSP (1DLL)	1LLXSPG12	02140	0.6	96	12	144
	1LLSP (1ALL)	1LLSPG12	02284	0.6	96	12	144
	1LL	1LLG12	02101	0.6	96	12	144
	WITH PINS						
	1XSP (1D)	1XSPG12NY	02141	0.6	96	12	144
	1SP (1A)	1SPG12NY	02285	0.6	96	12	144
	1	1G12NY	02102	0.6	96	12	144
	1LL	1LLG12NY	02103	0.6	96	12	144

HIGH TENSILE - WITHOUT PINS

1 SERIES	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	6" LENGTHS						
	1XSP (1D)	1XSPHT6	02133	0.6	50	24	144
	1SP (1A)	1SPHT6	02278	0.6	50	24	144
	1	1HT6	02089	0.6	50	24	144
	1LL	1LLHT6	02090	0.6	50	24	144
	12" LENGTHS						
	1XSP (1D)	1XSPHT12	02149	0.6	96	12	144
	1SP (1A)	1SPHT12	02113	0.6	96	12	144
	1	1HT12	02242	0.6	96	12	144
	1LLXSP (1DLL)	1LLXSPHT12	02150	0.6	96	12	144
	1LLSP (1ALL)	1LLSPHT12	02114	0.6	96	12	144
	1LL	1LLHT12	02243	0.6	96	12	144

Clipper® 1 (40) Series Carded Hooks



FASTENERS

430 STAINLESS - 6" LENGTHS

1 SERIES	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	WITHOUT PINS						
	1XSP (1D)	1XSPS6	02126	0.6	50	24	144
	1SP (1A)	1SPS6	02272	0.6	50	24	144
	1	1S6	02079	0.6	50	24	144
	1LL	1LLS6	02080	0.6	50	24	144
	WITH PINS						
	1XSP (1D)	1XSPS6NYS	02128	0.6	50	24	144
	1SP (1A)	1SPS6NYS	02274	0.6	50	24	144
	1	1S6NYS	02081	0.6	50	24	144
	1LL	1LLS6NYS	02082	0.6	50	24	144

NOTE: For 1 (40) Series Carded Hooks wire diameter = .040" (1.0 mm).

For extra pin material see pages 17-19.

430 STAINLESS - 12" LENGTHS

1 SERIES	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	WITHOUT PINS						
	1XSP (1D)	1XSPS12	02143	0.6	96	12	144
	1SP (1A)	1SPS12	02287	0.6	96	12	144
	1	1S12	02104	0.6	96	12	144
	1LLXSP (1DLL)	1LLXSPS12	02144	0.6	96	12	144
	1LLSP (1ALL)	1LLSPS12	02288	0.6	96	12	144
	1LL	1LLS12	02105	0.6	96	12	144
	WITH PINS						
	1XSP (1D)	1XSPS12NYS	02145	0.6	96	12	144
	1SP (1A)	1SPS12NYS	02289	0.6	96	12	144
	1	1S12NYS	02106	0.6	96	12	144

316L STAINLESS - WITHOUT PINS

1 SERIES	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	6" LENGTHS						
	1XSP (1D)	1XSPSS6	02130	0.6	50	24	144
	1SP (1A)	1SPSS6	02275	0.6	50	24	144
	1	1SS6	02083	0.6	50	24	144
	1LL	1LLSS6	02084	0.6	50	24	144
	12" LENGTHS						
	1XSP (1D)	1XSPSS12	02146	0.6	96	12	144
	1SP (1A)	1SPSS12	02110	0.6	96	12	144
	1	1SS12	02239	0.6	96	12	144
	1LLXSP (1DLL)	1LLXSPSS12	02147	0.6	96	12	144
	1LLSP (1ALL)	1LLSPSS12	02111	0.6	96	12	144
	1LL	1LLSS12	02240	0.6	96	12	144

 **Stock Items** (non-shaded) standard lead time is 3 working days.

 **Made To Order Items** (shaded) extended lead time, minimum order may apply.

Special Metals and **Special Length** Cards are available.
Request quote for price and delivery.



Clipper® ClipMark™ (36), 30, AP Series Hooks

FASTENERS

316L STAINLESS - WITHOUT PINS - 12" LENGTHS

36	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	36SP	36SPSS	02382	0.8	120	12	144
	36LLSP	36LLSPSS	02383	1.0	120	12	144
	36	36SS	02378	0.8	120	12	144
	36LL	36LLSS	02379	0.8	120	12	144
	36LLLP	36LLLPSS	02386	0.8	120	12	144

NOTE: For ClipMark™ Series Hooks
wire diameter = .036" x .027"
(0.9mm x 0.7mm).

For 30 Series Hooks
wire diameter = .030" (0.8mm).

For AP Series Hooks,
wire diameter = .047" (1.2mm).

For extra pin material see pages 17-19.

HASTELLOY - WITHOUT PINS - 12" LENGTHS

36	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	36SP	36SPH	02384	0.8	120	12	144
	36LLSP	36LLSPH	02385	1.0	120	12	144
	36	36H	02380	0.8	120	12	144
	36LL	36LLH	02381	1.0	120	12	144

316L STAINLESS – WITHOUT HINGE PINS – 12" LENGTHS

30	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	30SS	18180	1.0	120	24	288
	30PSS	18181	1.0	120	24	288
	30LSS	18182	1.2	120	24	288
	30LPSS	18183	1.3	120	24	288

AP CARDED HOOKS LOW PROFILE 316 STAINLESS – WITHOUT HINGE PINS – 12" LENGTHS

4-6	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	4APSS	18904	1.4	84	12	144
	5APSS	18905	1.5	84	12	144
	6APSS	18906	1.8	84	12	144
	6APPSS	18907	1.9	84	12	144

CLIPPER® ORDERING NUMBER REFERENCE

XSP	Extra Short Point
SP	Short Point
LP	Long Point
XLP	Extra Long Point
LL	Long Leg
SL	Short Leg
G	Galvanized
HT	High Tensile
RHTX	Rectangular Wire
S	430 Stainless Steel
SS	316 Stainless Steel

Clipper® 25 Series Hooks



FASTENERS

GALVANIZED - 6" LENGTHS

25 SERIES	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	WITHOUT PINS						
	25	25G6	01746	0.8	85	48	288
	25LP	25LPG6	01985	0.8	85	48	288
	25LL	25LLG6	01748	0.8	85	24	144
	WITH PINS						
	25	25G6NY	01752	0.8	85	48	288
	25LP	25LPG6NY	01987	0.8	85	48	288
	25LL	25LLG6NY	01754	0.8	85	24	144

NOTE: For 25 Series Hooks, wire diameter = .025" (.64 mm).

For extra pin material see pages 17-19.

GALVANIZED - 12" LENGTHS

25 SERIES	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	WITHOUT PINS - 12 Cards/Box						
	25	25G12	01810	0.8	179	12	144
	25LP	25LPG12	02006	0.8	179	12	144
	25LL	25LLG12	01811	1.1	179	12	144
	WITH PINS - 12 Cards/Box						
	25	25G12NY	01813	0.8	179	12	144
	25LP	25LPG12NY	02008	0.8	179	12	144
	25LL	25LLG12NY	01814	1.1	179	12	144

316L STAINLESS - 6" LENGTHS

25 SERIES	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	WITHOUT PINS						
	25	25SS6	01764	0.8	85	48	288
	25LP	25LPSS6	01990	0.8	85	48	288
	25LL	25LLSS6	01766	0.8	85	24	144
	WITH PINS						
	25	25SS6NYS	01772	0.8	85	48	288
	25LP	25LPSS6NYS	01993	0.8	85	48	288
	25LL	25LLSS6NYS	01774	0.8	85	24	144

316L STAINLESS - 12" LENGTHS

25 SERIES	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	WITHOUT PINS - 12 Cards/Box						
	25	25SS12	01817	0.8	179	12	144
	25LP	25LPSS12	02010	0.8	179	12	144
	25LL	25LLSS12	01818	0.8	179	12	144
	WITH PINS - 12 Cards/Box						
	25	25SS12NYS	01821	0.8	179	12	144
	25LP	25LPSS12NYS	02012	0.8	179	12	144

CLIPPER® ORDERING NUMBER REFERENCE

XSP	Extra Short Point
SP	Short Point
LP	Long Point
XLP	Extra Long Point
LL	Long Leg
SL	Short Leg
G	Galvanized
HT	High Tensile
RHTX	Rectangular Wire
S	430 Stainless Steel
SS	316 Stainless Steel

 **Stock Items** (non-shaded) standard lead time is 3 working days.

 **Made To Order Items** (shaded) extended lead time, minimum order may apply.

Special Metals and **Special Length** Cards are available.
Request quote for price and delivery.



Clipper® 25 Series Hooks

PRECUT #25 HOOKS (with Pins)

GALVANIZED- WITH NYLOSTEEL PINS

25 SERIES	BELT WIDTH		ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	in.	mm.						
	5/8	16	25G5/8NY	01841	0.3	7 & 8	200	125
	3/4	19	25G3/4NY	01859	0.3	8 & 9	200	150
	7/8	22.5	25G7/8NY	01864	0.4	10 & 11	200	175
	1	25.5	25G1NY	01871	0.5	12 & 13	200	200
	1-1/4	32	25G1-1/4NY	01884	0.6	15 & 16	200	250
	1-1/2	38.5	25G1-1/2NY	01891	0.7	19 & 20	200	300
	1-3/4	44.5	25G1-3/4NY	01911	0.8	22 & 23	200	350
	1-7/8	48	25G1-7/8NY	01917	0.9	24 & 25	200	375
	2	51	25G2NY	01926	0.9	26 & 27	200	400
	2-1/4	57.5	25G2-1/4NY	01939	1.1	30 & 31	200	450
	2-1/2	63.5	25G2-1/2NY	01946	1.1	33 & 34	200	500
	2-3/4	70	25G2-3/4NY	01954	1.3	37 & 38	200	550
	3	76.5	25G3NY	01963	1.4	39 & 40	200	600
	3-1/4	83	25G3-1/4NY	01828	0.8	42 & 43	100	325
	3-1/2	89	25G3-1/2NY	01786	0.8	46 & 47	100	350
	4	102	25G4NY	01732	1.0	54 & 55	100	400
	4-1/2	115	25G4-1/2NY	01798	1.2	61 & 62	100	450

NOTE: #25 Hooks are available with Long Point. Contact Customer Service for information.

For extra pin material see pages 17-19.

316L STAINLESS STEEL- WITH NYLOSTAINLESS PINS

25 SERIES	BELT WIDTH		ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER CARD	CARDS PER BOX	LACING INCHES PER BOX
	in.	mm.						
	5/8	16	25SS5/8NYS	01845	0.3	7 & 8	200	125
	3/4	19	25SS3/4NYS	01861	0.3	8 & 9	200	150
	1	25.5	25SS1NYS	01879	0.5	12 & 13	200	200
	1-1/4	32	25SS1-1/4NYS	01887	0.6	15 & 16	200	250
	1-1/2	38.5	25SS1-1/2NYS	01898	0.7	19 & 20	200	300
	1-7/8	48	25SS1-7/8NYS	01920	0.9	24 & 25	200	375
	2	51	25SS2NYS	01933	0.9	26 & 27	200	400
	2-1/4	57.5	25SS2-1/4NYS	01941	1.1	30 & 31	200	450
	2-1/2	63.5	25SS2-1/2NYS	01949	1.1	33 & 34	200	500
	2-3/4	70	25SS2-3/4NYS	01958	1.3	37 & 38	200	550
	3	76.5	25SS3NYS	01970	1.4	39 & 40	200	600
	3-1/2	89	25SS3-1/2NYS	01793	0.8	46 & 47	100	350
	4	102	25SS4NYS	01744	1.0	54 & 55	100	400

CLIPPER® ORDERING NUMBER REFERENCE

XSP	Extra Short Point
SP	Short Point
LP	Long Point
XLP	Extra Long Point
LL	Long Leg
SL	Short Leg
G	Galvanized
HT	High Tensile
RHTX	Rectangular Wire
S	430 Stainless Steel
SS	316 Stainless Steel

Stock Items (non-shaded) standard lead time is 3 working days.

Made To Order Items (shaded) extended lead time, minimum order may apply.

Special Metals and **Special Length** Cards are available.
Request quote for price and delivery.

Clipper® Unibar® Series Hooks



430 STAINLESS - WITHOUT PINS

UX-1, U2SP-U7	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER STRIP	STRIPS PER BOX	LACING INCHES PER BOX
	6" STRIPS - 24 STRIPS PER BOX						
	UX-1SP	UX1SPS6	01183	0.7	44	24	144
	UX-1	UX1S6	01178	0.7	44	24	144
	UX-1	UX1S6	01143	1.3	38	24	144
	UX-2	UX2S6	01230	1.3	38	24	144
	UX-3	UX3S6	01254	1.3	38	24	144
	12" STRIPS - 12 STRIPS PER BOX						
	UX-1SP	UX1SPS12	01184	0.7	96	12	144
	UX-1	UX1S12	01179	0.8	96	12	144
	UX-1LLSP	UX1LLSPS12	01338	1.0	96	12	144
	UX-1LL	UX1LLS12	01336	1.0	96	12	144
	U2SP	U2SPS12	18851	1.2	84	12	144
	U2	U2S12	18400	1.2	84	12	144
	U3	U3S12	01255	1.3	84	12	144
	U3RHTS	U3RHTS12	05340	1.3	84	12	144
	U3-1	U3-1S12	01144	1.3	84	12	144
	U3-1RHTS	U3-1RHTS12	05338	1.3	84	12	144
	U3-2	U3-2S12	01231	1.3	84	12	144
	U3-2RHTS	U3-2RHTS12	05339	1.3	84	12	144
	U4	U4S12	01283	1.7	84	12	144
	U5	U5S12	01305	1.8	84	12	144
	U6	U6S12	18404	1.9	84	12	144
	U7	U7S12	01294	2.0	84	12	144
	24" STRIPS - 10 STRIPS PER BOX						
	UX-1SP	UX1SPS24	01355	1.3	188	10	240
	UX-1	UX1S24	01356	1.3	188	10	240
	UX-1LLSP	UX1LLSPS24	01359	1.4	188	10	240
	UX-1LL	UX1LLS24	01360	1.4	188	10	240
	U2SP	U2SPS24	18854	2.0	162	10	240
	U2	U2S24	18477	2.0	162	10	240
	U3-1	U3-1S24	01363	2.2	162	10	240
	U3-1RHTS	U3-1RHTS24	05341	1.3	162	10	240
	U3-2	U3-2S24	01361	2.2	162	10	240
	U3-2RHTS	U3-2RHTS24	05342	1.3	162	10	240
	U3	U3S24	18478	2.2	162	10	240
	U3RHTS	U3RHTS24	05343	1.3	162	10	240
	U4	U4S24	18479	2.5	162	10	240
	U5	U5S24	01351	2.8	162	10	240

COATED STEEL™ - WITHOUT PINS

U1-U5	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER STRIP	STRIPS PER BOX	LACING INCHES PER BOX
	6" STRIPS - 24 STRIPS PER BOX						
	U3-1	U3-1C6	01137	1.3	38	24	144
	U3-2	U3-2C6	01125	1.3	38	24	144
	U3	U3C6	01250	1.3	38	24	144
	12" STRIPS - 12 STRIPS PER BOX						
	U2SP	U2SPC12	18850	1.2	84	12	144
	U2	U2C12	18370	1.2	84	12	144
	U3-1	U3-1C12	01138	1.3	84	12	144
	U3-2	U3-2C12	01126	1.4	84	12	144
	U3	U3C12	01251	1.3	84	12	144
	U4	U4C12	01279	1.7	84	12	144
	U5	U5C12	01301	1.8	84	12	144
	U6	U6C12	18374	1.9	84	12	144
	24" STRIPS - 10 STRIPS PER BOX						
	U2	U2C24	18453	2.0	162	10	240
	U3-1	U3-1C24	01364	2.2	162	10	240
	U3-2	U3-2C24	01362	2.2	162	10	240
	U3	U3C24	18454	2.2	162	10	240
	U4	U4C24	18455	2.5	162	10	240
	U5	U5C24	01352	2.8	162	10	240

STAINLESS RECTANGULAR HIGH TENSILE - WITHOUT PINS


U3	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER STRIP	STRIPS PER BOX	LACING INCHES PER BOX
	12" STRIPS - 12 STRIPS PER BOX						
	U3-1	U3-1RHTS12	05338	1.3	84	12	144
	U3-2	U3-2RHTS12	05339	1.4	84	12	144
	U3	U3-RHTS12	05340	1.3	84	12	144
	24" STRIPS - 10 STRIPS PER BOX						
	U3-1	U3-1RHTS24	05341	2.2	162	10	240
	U3-2	U3-2RHTS24	05342	2.2	162	10	240
	U3	U3-RHTS24	05343	2.2	162	10	240

NOTE: For U2SP-U7 Hooks,
wire diameter = .054" (1.4mm).
For UX1 Hooks,
wire diameter = .040" (1.0mm).
For UCM-36 Hooks,
wire diameter = .036" x .027"
(0.9mm x 0.7mm).

For extra pin material see
pages 17-19.

HOOK SIZE EXPLANATION:

U3-1 = #3 Leg with #1 point
U3-2 = #3 Leg with #2 point
U2 = #2 Leg with #2 point

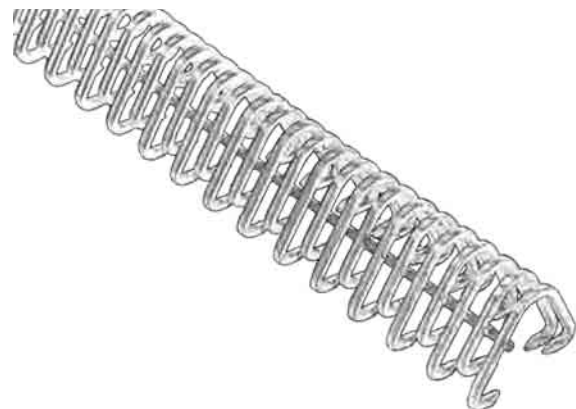



Clipper® Unibar® Series Hooks

316L STAINLESS - WITHOUT PINS

For extra pin material see pages 17-19.

UCM36, UX-1, U2-U5	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER STRIP	STRIPS PER BOX	LACING INCHES PER BOX
	6" STRIPS - 24 STRIPS PER BOX						
	UX-1SP	UX1SPSS6	01193	0.7	44	24	144
	UX-1	UX1SS6	01188	0.8	44	24	144
	12" STRIPS - 12 STRIPS PER BOX						
	UCM36 SLXSP	UCM36SLXSPSS12	01315	0.8	120	12	144
	UCM36 SLSP	UCM36SLSPSS12	01313	0.8	120	12	144
	UCM36 XSP	UCM36XSPSS12	01312	0.8	120	12	144
	UCM36 SP	UCM36SPSS12	01314	0.8	120	12	144
	UCM36	UCM36SS12	01309	1.0	120	12	144
	UCM36LP	UCM36LPSS12	01317	0.9	120	12	144
	UCM36LLSP	UCM36LLSPSS12	01318	0.9	120	12	144
	UCM36LL	UCM36LLSS12	01308	1.0	120	12	144
	UX-1SP	UX1SPSS12	01194	0.7	96	12	144
	UX-1	UX1SS12	01189	0.8	96	12	144
	UX-1LLSP	UX1LLSPSS12	01342	1.0	96	12	144
	UX-1LL	UX1LLSS12	01340	1.0	96	12	144
	UA2	UA2SS12	01292	1.1	120	12	144
	UA3	UA3SS12	01293	1.1	120	12	144
	U2	U2SS12	18427	1.2	84	12	144
	U3	U3SS12	01258	1.6	84	12	144
	U4	U4SS12	18429	1.8	84	12	144
	U5	U5SS12	18430	1.8	84	12	144
	24" STRIPS - 10 STRIPS PER BOX						
	UX-1SP	UX1SPSS24	01354	1.0	188	10	240
	UX-1	UX1SS24	01353	0.8	188	10	240
	UX-1LLSP	UX1LLSPSS24	01358	1.0	188	10	240
	UX-1LL	UX1LLSS24	01357	1.0	188	10	240
	U2	U2SS24	18507	2.0	162	10	240
	24" STRIPS - 12 STRIPS PER BOX						
	UCM36 SLXSP	UCM36SLXSPSS24	01319	1.3	234	12	288
	UCM36 SLSP	UCM36SLSPSS24	01320	1.3	234	12	288
	UCM36 XSP	UCM36XSPSS24	01321	1.4	234	12	288
	UCM36 SP	UCM36SPSS24	01322	1.4	234	12	288
	UCM36	UCM36SS24	01323	1.4	234	12	288
	UCM36LP	UCM36LPSS24	01385	1.4	234	12	288
	UCM36LLSP	UCM36LLSPSS24	01324	1.6	234	12	288
	UCM36LL	UCM36LLSS24	01325	1.6	234	12	288

COATED STEEL™ - WITH PINS

U2-U6	HOOK SIZE	ORDERING NUMBER (BOX)	ITEM CODE	WT. PER BOX LBS.	HOOKS PER STRIP	STRIPS PER BOX	LACING INCHES PER BOX
	12" STRIPS - 12 STRIPS PER BOX						
	U2	U2C12W	18540	1.2	84	12	144
	U3	U3C12W	18541	1.4	84	12	144
	U4	U4C12W	18542	1.6	84	12	144
	U5	U5C12W	18543	1.9	84	12	144
	U6	U6C12W	18544	2.1	84	12	144

CLIPPER® ORDERING NUMBER REFERENCE

XSP	Extra Short Point
SP	Short Point
LP	Long Point
XLP	Extra Long Point
LL	Long Leg
SL	Short Leg
G	Galvanized
HT	High Tensile
RHTX	Rectangular Wire
S	430 Stainless Steel
SS	316 Stainless Steel

Stock Items (non-shaded) standard lead time is 3 working days.

Made To Order Items (shaded) extended lead time, minimum order may apply.

Special Metals and Special Length Cards are available.
Request quote for price and delivery.



CONNECTING PIN SPECIFICATIONS

Pin Diameter	.065" (1/16") 1.7 mm (previously #25)	.093" (3/32") 2.4 mm (previously #13)	.109" (7/64") 2.8 mm (previously #12)	.125" (1/8") 3.2 mm (previously #11)	.156" (5/32") 4.0 mm (previously #9)
Clipper® Hook Size	25's, 36's, 1's, UCM36's, UX-1's	2, 3, U2SP, U2 U3-1, U3-2, U3	4 & U4	4 ½, 5, U5	6, 7, U6 & U7

Connecting Pin Types	Abbreviation	Pin Wear Factor	Hook Wear Factor	Rigidity	Magnetic	Flexibility	Composition
Nylosteel	NY	Good	Good	Good	Yes	Good	Nylon & music wire
Nylostainless	NYS	Good	Good	Good	Slightly	Good	Nylon & 300SS spring wire
Nylon Covered Cable	NCS	Good	Good	Average	Slightly	Good	Nylon & 300SS cable
Music Wire	MW	Good	Poor	Excellent	Yes	Poor	High-carbon spring-tempered steel
Cold-Rolled Steel	Smooth - SM Notched - N	Average	Fair	Excellent	Yes	Fair to Poor	Mild cold-rolled steel
Stainless Steel	Smooth - SMS Notched - NS	Average	Fair	Excellent	Slightly	Fair to Poor	302 or 300 stainless steel
Duralink™	DL	Excellent	Excellent	Average	Slightly	Good	Wear-resistant nylon & 300SS cable
Bare Stainless Cable	SMSC	Average	Fair	Average	Slightly	Good	300SS cable
DuraStainless™	DSS	Excellent	Excellent	Good	Slightly	Good	Wear resistant nylon & 300SS spring wire
Nylon Plus	NP	Good	Excellent	Fair	No	Excellent	Nylon

PINPAK™ 100



(100 ft. of connecting pin with dispenser)

PIN DIAMETER	ORDERING NUMBER	ITEM CODE	WT. LBS.	PIN DIAMETER	ORDERING NUMBER	ITEM CODE	WT. LBS.	PIN DIAMETER	ORDERING NUMBER	ITEM CODE	WT. LBS.
NYLOSTEEL				NYLOSTAINLESS				NYLON COVERED CABLE			
.053	NY053-C	18700	1.6	.053	NYS053-C	18701	1.6	.053	NCS065-C	02751	1.7
.065	NY065-C	02598	1.6	.065	NYS065-C	02649	1.6	.065			
.079	NY079-C	18720	1.8	.079	NYS079-C	18721	1.8	.079			
.093	NY093-C	02628	2.0	.093	NYS093-C	02670	2.0	.093	NCS093-C	02767	1.7
.109	NY109-C	02622	2.1	.109	NYS109-C	02664	2.1	.109			
.125	NY125-C	02614	2.2	.125	NYS125-C	02658	2.2	.125	NCS125-C	02762	3.0
.156	NY156-C	02607	2.5	.156	NYS156-C	02652	2.5	.156	NCS156-C	02756	3.3
NYLON PLUS				DURALINK™				DURASTAINLESS™			
.053	NP053-C	02863	1.6	.065	DL065-C	02726	1.8	.065	DSS065-C	02826	1.8
.065	NP065-C	02854	1.6								
.079	NP079-C	02872	1.8	.093	DL093-C	02743	2.1	.093	DSS093-C	02830	2.1
.093	NP093-C	02867	2.0								
.109	NP109-C	02861	2.1	.109	DL109-C	02737	2.2	.109	DSS109-C	02834	2.2
.125	NP125-C	02864	2.2	.125	DL125-C	02732	2.3				
.156	NP156-C	02873	2.5								






Clipper® Connecting Pins

NYLON COVERED LEADER ASSEMBLIES

PIN DIAMETER	ORDERING NUMBER	ITEM CODE	PIN LENGTH	LEADER LENGTH
NYLON COVERED CABLE				
.065	NCS065X10FT-W/10FT	05021	10	10
.065	NCS065X25FT-W/5FT	05022	25	5
.093	NCS093X5FT-W/5FT	05194	5	5
.093	NCS093X10FT-W/10FT	05023	10	10
.093	NCS093X15FT-W/2FT	05195	15	2
.093	NCS093X25FT-W/5FT	05024	25	5
.093	NCS093X25FT-W/10FT	05025	25	10
.093	NCS093X50FT-W/4FT	05196	50	4
DURALINK™				
.065	DL065X25FT-W/5FT	05193	25	5
.093	DL093X10FT-W/10FT	05020	10	10
.093	DL093X25FT-W/5FT	05019	25	5

Other sizes can be custom ordered.



12" PRE-CUT PINS

(24 pins per package)


PIN DIAMETER	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
NYLOSTEEL			NYLOSTAINLESS		NYLON PLUS	
.065	NY065-12	02592	NYS065-12	02644	NP065-12	02847
.093	NY093-12	02625	NYS093-12	02668	NP093-12	02865
.109	NY109-12	02619	NYS109-12	02662	NP109-12	02859
.125	NY125-12	02611	NYS125-12	02656	NP125-12	02833
.156	NY156-12	02600	NYS156-12	02650	NP156-12	02832

CONNECTING PIN TOOLS

DESCRIPTION	ORDERING NUMBER	ITEM CODE
Pin and Cable Cutter	APC-1	50004
Pin and Cable Stripper	CABLE STRIPPER	03241

.065" PRE-CUT PINS

BELT WIDTH in.	mm.	PINS/ PACKAGE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
NYLOSTEEL					NYLOSTAINLESS	
5/8"	16	100			NYS065-5/8-100	02632
3/4"	19	100	NY065-3/4-100	02576		
7/8"	22.5	100	NY065-7/8-100	02574		
1"	25.5	100	NY065-1-100	02577	NYS065-1-100	02637
1 1/4"	32	100	NY065-1-1/4-100	02578	NYS065-1-1/4-100	02633
1 1/2"	38.5	100	NY065-1-1/2-100	02579	NYS065-1-1/2-100	02634
1 3/4"	44.5	100	NY065-1-3/4-100	02580		
1 7/8"	48	100	NY065-1-7/8-100	02581	NYS065-1-7/8-100	02635
2"	51	100	NY065-2-100	02582	NYS065-2-100	02638
2 1/4"	57.5	100	NY065-2-1/4-100	02583	NYS065-2-1/4-100	02639
2 1/2"	63.5	100	NY065-2-1/2-100	02584	NYS065-2-1/2-100	02640
2 3/4"	70	100	NY065-2-3/4-100	02585		
3"	76.5	100	NY065-3-100	02586	NYS065-3-100	02641
3 1/4"	83	50	NY065-3-1/4-50	02587	NYS065-3-1/4-50	02636
3 1/2"	87	50	NY065-3-1/2-50	02588		
4"	102	50	NY065-4-50	02589	NYS065-4-50	02642
4 1/2"	115	50	NY065-4-1/2-50	02590		
6"	152	24	NY065-6-24	02591	NYS065-6-24	02643



CONNECTING PINS IN COILS

(25 ft. minimum)

PIN DIAMETER	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
NYLOSTEEL			NYLOSTAINLESS		NYLON COVERED CABLE	
.053	NY053	02594	NYS053	02645	NCS065	02750
.065	NY065	02597	NYS065	02648		
.079	NY079	02595	NYS079	02646		
.093	NY093	02627	NYS093	02669	NCS093	02766
.109	NY109	02621	NYS109	02663	NCS125	02761
.125	NY125	02613	NYS125	02657	NCS156	02755
.156	NY156	02606	NYS156	02651		
DURALINK™			DURASTAINLESS™			
.065	DL065	02725	DSS065	02727		
.093	DL093	02742	DSS093	02744		
.109	DL109	02736	DSS109	02738		
.125	DL125	02731				
SMOOTH STEEL			NOTCHED STEEL		SMOOTH SS	
.040					SMS040	02772
.054	SM054	02771	N054	02775	SMS054	02779
.093	SM093	02773	N093	02777	SMS093	02781
NOTCHED SS			NYLON PLUS		BARE SS CABLE	
.053/.054	NS054	02783	NP053	02868	SMSC065	02769
.065			NP065	02853		
.079			NP079	02869		
.093	NS093	02784	NP093	02866	SMSC093	02770
.109			NP109	02860		
.125			NP125	02870		
.156			NP156	02871		

NOTE: For coils less than 25 ft., call Flexco Customer Service.

MUSIC WIRE

PIN DIAMETER	DESCRIPTION	ORDERING NUMBER	ITEM CODE
.043"	Per Foot	MW043	02787
.054"	Per Foot	MW054	02788
.072"	12 Foot Lengths	MW072	02789
.090"	12 Foot Lengths	MW090	02791
.090"	100 Foot Lengths	MW090-100	02790

STRIPPED LEADERS

DESCRIPTION	ORDERING NUMBER	ITEM CODE
.093 x 123" Nylosteel with 63" Stripped Leader	NY093-123	02629
.093 x 246" Nylosteel with 63" Stripped Leader	NY093-246	02630
.093 x 100' Nylosteel with 63" Stripped Leader	NY093-100	02631
.093 x 123" DuraStainless™ with 63" Stripped Leader	DSS093-123	04093
.093 x 246" DuraStainless™ with 63" Stripped Leader	DSS093-246	04044

 **Stock Items** (non-shaded) carried in factory inventory.

 **Made To Order Items** (shaded) have added lead time.

Non-Listed Items are available.
Request quote for price and delivery.



Clipper® Maintenance Lacers

ROLLER LACER® GOLD CLASS™

(Face strips sold separately)

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24"	600	RL-G24	03985	50.0
36"	900	RL-G36	03986	58.0
48"	1200	RL-G48	03987	66.0
60"	1500	RL-G60	03988	74.0

NOTE: Includes carding paper remover and scissors.

MANUAL ROLLER LACER®

(Face strips sold separately)

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24"	600	RL-24	03370	38.0
36"	900	RL-36	03371	47.0
48"	1200	RL-48	03372	55.0
60"	1500	RL-60	03375	63.0

NOTE: Includes carding paper remover and scissors.

CLIPPER® FACE STRIPS (includes one Lacer Pin)

ROLLER LACER® GOLD CLASS™

MANUAL ROLLER LACERS


BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	HOOK SIZE 30					
24"	600				FSMAN30-24	04064	1.3
36"	900				FSMAN30-36	04065	1.6
48"	1200				FSMAN30-48	04066	2.1
60"	1500				FSMAN30-60	04067	2.6
in.	mm	HOOK SIZE 36, UCM36					
24"	600	FSGOLD36-24	04038	4.3	FSMAN36-24	04020	1.3
36"	900	FSGOLD36-36	04039	5.4	FSMAN36-36	04021	1.6
48"	1200	FSGOLD36-48	04040	6.4	FSMAN36-48	04022	2.1
60"	1500	FSGOLD36-60	04041	7.6	FSMAN36-60	04023	2.6
HOOK SIZE 1, UX-1							
24"	600	FSGOLD1-24	04034	4.3	FSMAN1-24	04015	1.3
36"	900	FSGOLD1-36	04035	5.4	FSMAN1-36	04016	1.6
48"	1200	FSGOLD1-48	04036	6.4	FSMAN1-48	04017	2.1
60"	1500	FSGOLD1-60	04037	7.6	FSMAN1-60	04018	2.6
HOOK SIZE 2 – 4, U2SP – U3							
24"	600	FSGOLD2-24	04042	4.3	FSMAN2-24	04025	1.3
36"	900	FSGOLD2-36	04043	5.4	FSMAN2-36	04026	1.6
48"	1200	FSGOLD2-48	04044	6.4	FSMAN2-48	04027	2.1
60"	1500	FSGOLD2-60	04045	7.6	FSMAN2-60	04028	2.6
HOOK SIZE 4-1/2 – 7, U4 – U7							
24"	600	FSGOLD4-1/2-24	04046	4.3	FSMAN4-1/2-24	04030	1.3
36"	900	FSGOLD4-1/2-36	04047	5.4	FSMAN4-1/2-36	04031	1.6
48"	1200	FSGOLD4-1/2-48	04048	6.4	FSMAN4-1/2-48	04032	2.1
60"	1500	FSGOLD4-1/2-60	04049	7.6	FSMAN4-1/2-60	04033	2.6

CLIPPER® REPLACEMENT LACER PINS

ROLLER LACER® GOLD CLASS™

MANUAL ROLLER LACERS

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	HOOK SIZE 1, 36, or 30					
24"	600	LPGOLD1/36-24	04006	0.4	LPMAN1/36-24	03997	0.4
36"	900	LPGOLD1/36-36	04007	0.5	LPMAN1/36-36	03998	0.5
48"	1200	LPGOLD1/36-48	04008	0.6	LPMAN1/36-48	03999	0.6
60"	1500	LPGOLD1/36-60	04009	0.7	LPMAN1/36-60	04000	0.7
		HOOK SIZE 2-4, 4-1/2-7					
24"	600	LPGOLDREG-24	04010	0.4	LPMANREG-24	04002	0.4
36"	900	LPGOLDREG-36	04011	0.5	LPMANREG-36	04003	0.5
48"	1200	LPGOLDREG-48	04012	0.6	LPMANREG-48	04004	0.6
60"	1500	LPGOLDREG-60	04013	0.7	LPMANREG-60	04005	0.7

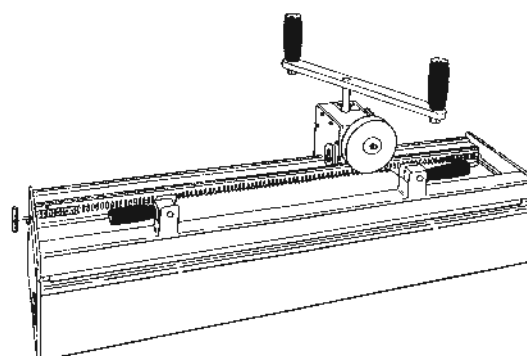

ALLIGATOR® FACE STRIPS FOR ROLLER LACER

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
24" (600mm) for 00 Alligator Lacing	GFSAM00-24	18244	1.0
36" (900mm) for 00 Alligator Lacing	GFSAM00-36	18245	1.35
24" (600mm) for 1 & 7 Alligator Lacing	GFSAM1&7-24	19701	1.02
36" (900mm) for 1 & 7 Alligator Lacing	GFSAM1&7-36	19702	1.28
48" (1200mm) for 1 & 7 Alligator Lacing	GFSAM1&7-48	19703	1.40
60" (1500mm) for 1 & 7 Alligator Lacing	GFSAM1&7-60	19704	1.65

NOTE: When using a 48" or 60" Alligator Face Strip, the fastener length must be no longer than 36" (multiple strips can be used in the face strip).

COMMON REPAIR PARTS

DESCRIPTION/ORDERING NUMBER	ITEM CODE	WT. LBS.
Guide Block Replacement Kit For Serial Number 3,500 - 50,000	03433	1.00
Guide Block Replacement Kit For Serial Number greater than 50,000	03897	1.00
Face Strip Knobs	03817	.50
Urethane Strip - Priced Per Foot	03274	.50
Carrying Strap - Large For 48" and 60" Roller Lacers	04051	1.0
Carrying Strap - Small For 24" and 36" Roller Lacers	04052	1.0
Nut Driver for Roller Lacer Gold Class	04068	1.0

Clipper® Maintenance Lacers



MICROLACER®

(Face strips sold separately)


BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
14"	350	MICROLACER	03368	27.0

NOTE: Includes carding paper remover and scissors.

CLIPPER® FACE STRIPS

(Includes one Lacer Pin)

HOOK SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
30	FSMAN30-MICRO	04063	2.3
36, UCM36	FSMAN36-MICRO	04019	2.3
1, UX-1	FSMAN1-MICRO	04014	2.3
2-4, U2-U3,	FSMAN2-MICRO	04024	2.3
4-1/2-7, U4-U7	FSMAN4-1/2-MICRO	04029	2.3

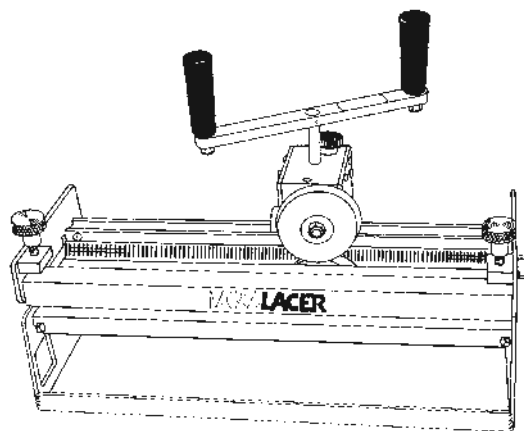

CLIPPER® REPLACEMENT LACER PINS

HOOK SIZE	ORDERING NUMBER	ITEM CODE	PIN DIA.
1/36	LPMAN1/36-MICRO	03996	0.67
2-7	LPMANREG-MICRO	04001	.106

ALLIGATOR® FACE STRIPS FOR MICROLACER

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
for 00 Alligator Lacing	GFSA00-14	18243	.5
for 1 & 7 Alligator Lacing	GFSA1&7-14	18248	.5

COMMON REPAIR PARTS

DESCRIPTION/ORDERING NUMBER	ITEM CODE	WT. LBS.
Guide Block Replacement Kit For Serial Number 3,500 – 50,000	03433	1.00
Guide Block Replacement Kit For Serial Number greater than 50,000	03897	1.00
Face Strip Knobs	03817	.50
Urethane Strip – Priced Per Foot	03274	.10

 **Stock Items** (non-shaded) carried in factory inventory.

 **Made To Order Items** (shaded) have added lead time.

Non-Listed Items are available.

Request quote for price and delivery.

VALULACER REPLACEMENT PARTS

CLIPPER® FACE STRIPS

(Includes one Lacer Pin)

HOOK SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
36, UCM36	FS36-VALU	03425	0.6
1, UX-1	FS1-VALU	03429	0.6
2-4, U2-U3,	FS2-VALU	03430	0.6
4-1/2-7, U4-U7	FS4-1/2-VALU	03431	0.6

CLIPPER® REPLACEMENT GAUGE PINS

HOOK SIZE	ORDERING NUMBER	ITEM CODE	PIN DIA.
1/36	LP1/36 VALU	03339	.067
2-7	LPREG VALU	03328	.106



Clipper® Specialty Lacers


LW95 LACERS

(Laces all Clipper Hooks. Laces up to 6" in one operation. Includes Lacing Assembly Kit)

HOOK SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.	RETAINER INCLUDED
2-7, U2-U7	LW95	03074	31.0	HRREGLW95
1, UX-1	1LW95	03076	31.0	HR1LW95
25	25XLW	03075	31.0	HR25LW95

REPLACEMENT HOOK RETAINERS


2-7, U2-U7	HR2LW95	03085	0.6
1, UX-1	HR1LW95	03081	0.5
25	HR25LW95	03827	1.0
30, 36, UCM36	HR36LW95	03119	0.5



LW95 Lacer

WISE LACERS

HOOK SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
2-7, U2-U7	R-4	03018	1.0
2-7, U2-U7	R-7	03019	2.0
2-7, U2-U7	R-10	03020	3.0
1, UX-1, UX-1SP	1VL-7	03236	2.0
25	25VL-7	03814	3.0
30, 36, UCM36	36VL-7	03238	1.0




Wise Lacer

BALER BELT LACER™

(Laces all Clipper Baler Hooks, RHTX, 2-7)

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
7"	175	BBL-7	03434	51.0
10"	250	BBL-10	03435	51.0




Baler Belt Lacer

LEVER LACER

(For thin belts or tapes up to 2" wide)

HOOK SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
25	25LEVER	03014	5.0
36	36LEVER	04223	5.0




Lever Lacer

PLIER-TAPE LACER

(For thin belts or tapes up to 2" wide)

ORDERING NUMBER	ITEM CODE	WT. LBS.
PTL25	18015	3.5
PTL30	18017	3.7
PTL1	18016	3.6



Plier-Tape Lacer

Clipper® Production Lacers



#12 SPEED LACER

(Includes #2-7 Retainer)

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
12"	300	12LACER	03167	177.0
CHAIN DRIVE ATTACHMENT				
12LACER-CHAIN			03225	24.0

CLIPPER® HOOK RETAINER FOR #12 SPEED LACER

(Includes one Lacer Pin)

DESCRIPTION	HOOK SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
Acusteel	25	HR25-12	03822	1.8
Acusteel	30,36,UCM36	HR36-12	03170	1.5
Acusteel	1,UX-1	HR1-12	03168	1.5
Acusteel	2-7,U2-U7	HR2-12	03211	1.5

12" LACER PIN FOR #12 SPEED LACER

HOOK SIZE	ORDERING NUMBER	ITEM CODE
25,30,36,1	LP1/36-12	03169
2-7	LP2-12	03222

ELECTRIC HYDRAULIC POWER LACERS

(Includes #2-7 Retainer)


BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
12"	300	EH-12	03037	355.0
25"	625	EH-25	03038	560.0
38"	950	EH-38	03039	875.0

NOTE: Please specify 115 or 230 volt wiring requirements when ordering.
Can be ordered for International Requirements.


CLIPPER® HOOK RETAINER FOR POWER LACERS

(Includes one Lacer Pin)

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	HOOK SIZE 25		
12"	300	HR25-12	03822	1.8
25"	625	HR25-25	03823	3.3
38"	950	HR25-38	03824	4.2
		HOOK SIZE 30, 36, UCM36		
12"	300	HR36-12	03170	1.5
25"	625	HR36-25	03154	3.3
38"	950	HR36-38	03155	4.2
		HOOK SIZE 1, UX-1		
12"	300	HR1-12	03168	1.5
25"	625	HR1-25	03143	3.3
38"	950	HR1-38	03150	4.2
		HOOK SIZE 2-7, U2-U7		
12"	300	HR2-12	03211	1.5
25"	625	HR2-25	03051	3.3
38"	950	HR2-38	03148	4.2



#12 Speed Lacer

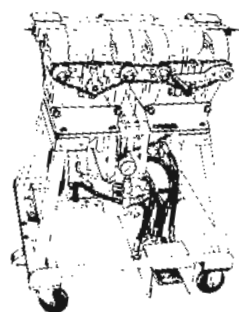

Electric Hydraulic Lacer

ELECTRIC HYDRAULIC LACER COVER

LACER SIZE		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
12"	300	Cover-12	03452	3.0
25"	625	Cover-25	03453	4.0
38"	950	Cover-38	03519	5.0

CLIPPER® REPLACEMENT LACER PINS FOR POWER LACER

BELT		ORDERING NUMBER	ITEM CODE
in.	mm	HOOK SIZE 25, 36, 1	
12"	300	LP1/36-12	03169
25"	625	LP1/36-25	03162
38"	950	LP1/36-38	03163
		HOOK SIZE 2-7	
12"	300	LP2-12	03222
25"	625	LP2-25	03054
38"	950	LP2-38	03156


 **Stock Items** (non-shaded) carried in factory inventory.

 **Made To Order Items** (shaded) have added lead time.


Non-Listed Items are available.
Request quote for price and delivery.




Clipper® Production Lacers



PRO-600



PRO-400



PRO-200

PRO-600 & PRO-6000 LACER

(Does not include comb - purchase separately)

ORDERING NUMBER	ITEM CODE	WEIGHT (LBS)
PRO-600	18057	294.2
PRO-6000	18978	304.2

PRO-400 LACER

(Does not include adapter - purchase separately)

ORDERING NUMBER	ITEM CODE	WEIGHT (LBS)
PRO-400	18048	294.1

PRO-200 LACER

(Does not include adapter - purchase separately)

ORDERING NUMBER	ITEM CODE	WEIGHT (LBS)
PRO-200	18036	69.9
PRO-200EH	03707	80.0

COMBS FOR PRO-600 & PRO-6000 LACER

(Includes Gauge Pins)

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	HOOK SIZE 25		
24"	600	P6CLPR25M-24	03526	10.1
36"	900	P6CLPR25M-36	03538	13.0
48"	1200	P6CLPR25M-48	03551	15.5
60"	1500	P6CLPR25M-60	03531	18.5
		HOOK SIZE 36, UCM36, 30		
24"	600	P6CLPR36M-24	03524	10.1
36"	900	P6CLPR36M-36	03537	13.0
48"	1200	P6CLPR36M-48	03539	15.5
60"	1500	P6CLPR36M-60	03529	18.5
		HOOK SIZE 1, UX1		
24"	600	P6CLPR1M-24	03534	10.1
36"	900	P6CLPR1M-36	03535	13.0
48"	1200	P6CLPR1M-48	03550	15.5
60"	1500	P6CLPR1M-60	03528	18.5
		HOOK SIZE 2-7, U2-U7		
24"	600	P6CLPR2M-24	03533	10.1
36"	900	P6CLPR2M-36	03536	13.0
48"	1200	P6CLPR2M-48	03532	15.5
60"	1500	P6CLPR2M-60	03527	18.5

ADAPTERS FOR PRO-400 LACER-14"

(Includes 1.5 and 2.0 mm Gauge Pins)

HOOK SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
25	P4CLPR25	03649	7.3
36, 30	P4CLPR36	03140	7.5
1	P4CLPR1	03525	7.5
2-7	P4C2	18052	8.0

ALLIGATOR® ADAPTERS-PRO-400

(Includes Gauge Pins)

ORDERING NUMBER	ITEM CODE	WT. LBS.	LACING SIZE
P4GF	18055	7.1	1 & 7
P4GF15	18056	7.2	15

REPLACEMENT LACER PINS FOR PRO-400 LACER

FOR COMB NUMBER	DIAMETER (mm)	ITEM CODE	WT. LBS.
P4C25/36	1.5	19395	.1
P4C25/36	1.8 x 1.5	03738	.1
P4C25/36	2.0 x 1.5	03745	.1
P4C1	1.8	03715	.1
P4C1	2.0	19350	.1
P4C1	2.5 x 2.0	19380	.1
P4C1	3.0 x 2.0	19351	.1
P4C2	2.5	19349	.3
P4C2	3.5 x 3.0	03725	.3
P4C2	4.0 x 3.0	03724	.3

ADAPTERS FOR PRO-200 LACER-8"

(Includes 1.5 and 2.0 mm Gauge Pins)

HOOK SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
25	P2CLPR25	03650	4.3
36, 30	P2CLPR36	03591	4.3
1	P2CLPR1	03651	4.8
2-7	P2C2	18043	5.2

ALLIGATOR® ADAPTERS-PRO-200

(Includes Gauge Pins)

ORDERING NUMBER	ITEM CODE	WT. LBS.	LACING SIZE
P2GF	18046	4.3	1 & 7
P2GF15	18047	4.5	15

REPLACEMENT LACER PINS FOR PRO-200 LACER

FOR COMB NUMBER	DIAMETER (mm)	ITEM CODE	WT. LBS.
P2C25/36	1.5	19340	.1
P2C25/36	1.8 x 1.5	03739	.1
P2C25/36	2.0 x 1.5	03744	.1
P2C1	1.8	03713	.1
P2C1	2.0	19341	.1
P2C1	2.5 x 2.0	19342	.1
P2C1	3.0 x 2.0	19343	.1
P2C2	2.5	19339	.3
P2C2	3.5 x 3.0	03717	.3
P2C2	4.0 x 3.0	03718	.3

REPLACEMENT LACER PINS FOR PRO-600 LACER

BELT WIDTH		ITEM CODE				WT. LBS.
in.	mm	FOR COMB NUMBER P6C25/36				
		1.5 mm	1.8 mm x 1.5 mm	2.0 mm x 1.5 mm		
24"	600	03729	03734	03743		0.2
36"	900	03727	03735	03742		0.2
48"	1200	03728	03736	03741		0.2
60"	1500	19358	03737	03740		0.2
		FOR COMB NUMBER P6C1				
		1.8 mm	2.0 mm	2.5 mm x 2.0 mm	3.0 mm x 2.0 mm	
24"	600	03710	19361	19362	03722	0.2
36"	900	03709	03714	03721	03733	0.2
48"	1200	03708	03711	03723	03732	0.2
60"	1500	19378	03712	03716	03731	0.2
		FOR COMB NUMBER P6C2				
		2.5 mm	3.5 mm x 3.0 mm	4.0 mm x 3.0 mm		
24"	600	19364	19365	19366		0.3
36"	900	03726	03719	03720		0.3
48"	1200	19368	19370	19371		0.3
60"	1500	19373	19375	19376		0.3


ALLIGATOR® COMBS-PRO-600

(Includes Gauge Pins)

ORDERING NUMBER	ITEM CODE	WT. LBS.	LACING SIZE
P6ALLI00M-24	03914	8.7	00
P6ALLI00M-36	03915	13.0	00
P6ALLI1&7-24	03916	8.7	1&7
P6ALLI1&7-36	03917	13.0	1&7
P6ALLI15-24	03919	8.7	15
P6ALLI15-36	03920	13.0	15

REPLACEMENT PARTS

DESCRIPTION	ITEM CODE	WT. LBS.
Return Springs	19100	1.0
Adapter Spring Clip	19194	1.0
Linear Bearing	19200	2.0
Brass Bushing	19300	5.0



How Alligator® Lacing Works

Hammer applied Alligator® Lacing utilizes a design with teeth that are formed so that when they are driven parallel to the length of the belt, the vital longitudinal carcass fibers are not severed.

The compression fit of the connecting bar provides a strong, vise-like hold on the belt

and distributes belt tension evenly across the entire belt width. The one-piece fastener strip also ensures that there are no loose pieces to work themselves out of the belt and into the conveyed product. The flat splice obtained with a continuous strip of lacing also helps with hinge pin insertion.

Applications	Installation Method	What You Need for Installation
- Manufacturing Assembly Lines - Food, Package, and Parts Handling - Checkout Counters - Agricultural Equipment	Requires only a hammer; no special tools needed. Unique, patented clips and round gauge rod act as an "extra" pair of hands.	- Fasteners - Hinge Pin - Hammer
How to Specify the Correct Alligator® Lacing	Fastener Metal Selection	Hinge Pin Selection
- Determine Belt Tension (PIW). - Measure your Belt Thickness. - Measure the Diameter of the Smallest Pulley in your Drive with Belt Wrap more than 90°. - Choose the fastener size that is appropriate for your specifications in the selection chart below.	Steel. Standard fastener material. Stainless Steel. Type 316 Stainless Steel	H Steel Corrugated - for all sizes of Alligator belt lacing. SH Stainless Steel Corrugated - for all sizes of Alligator belt lacing. RH Rocker Hinge Pin - for transmission belt lacing, two-piece pin to reduce friction and wear on loops and lacing. NC Nylon Covered Steel Cable - for easier hinge pin insertion. NCS Nylon Covered Stainless Cable - for greater corrosion resistance.

Alligator® Lacing Selection Chart

Lacing Size	For Belts With Mechanical Fastener Ratings Up To:		Belt Thickness Range		Recommended Min. Pulley Diameter		Approx. Corrugated Hinge Pin Diameter	
	P.I.W.	kN/m	in.	mm	in.	mm	in.	mm
00	25	4.3	Up thru 1/16	Up thru 1.6	1	25	3/64	1.2
1	45	7.8	1/16-3/32	1.6-2.4	1-1/2	38	1/16	1.6
7	50	8.7	3/32-9/64	2.4-3.6	2	51	1/16	1.6
15	65	11.4	1/8-5/32	3.2-4.0	2-1/2	64	3/32	2.4
20	95	16.6	5/32-3/16	4.0-4.8	3	76	7/64	2.8
25	100	17.5	3/16-7/32	4.8-5.6	4	102	1/8	3.2
27	100	17.5	7/32-9/32	5.6-7.1	5	127	1/8	3.2
35	150	26.0	9/32-5/16	7.1-7.9	7	178	9/64	3.6
45	165	28.0	5/16-3/8	7.9-9.5	9	229	3/16	4.8
55	175	30.0	3/8-7/16	9.5-11.1	12	305	13/64	5.2
65	200	35.0	7/16-1/2	11.1-12.7	14	356	13/64	5.2



Alligator® Conveyor Belt Lacing

FASTENERS

STEEL LACING WITH STEEL CORRUGATED HINGE PIN

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.				
in.	mm	00			1A			1B			7			15						
12"	300	00-12	10050	.2	1A-12	10070	.5	Note: Size 1A and 1B Alligator lacing has been modified to allow for complete interchangeability. For machine applied lacing, order the corresponding 1A size.	7-12	10090	.7	15-12	10482	1.0						
14"	350	00-14	10051	.5	1A-14	10071	.7								7-14	10091	.9	15-14	10110	1.2
16"	400	00-16	10052	.5	1A-16	10072	.8								7-16	10092	1.0	15-16	10111	1.4
18"	450	00-18	10053	.5	1A-18	10073	.8								7-18	10093	1.1	15-18	10112	1.5
20"	500	00-20	10054	.6	1A-20	10074	1.0								7-20	10094	1.2	15-20	10113	1.6
22"	550	00-22	10055	.6	1A-22	10075	1.0								7-22	10095	1.3	15-22	10114	1.8
24"	600	00-24	10056	.7	1A-24	10076	1.1								7-24	10096	1.4	15-24	10115	2.0
26"	650														7-26	10097	1.5	15-26	10116	2.2
28"	700														7-28	10098	1.6	15-28	10117	2.3
30"	750	00-30	10059	.9	1A-30	10079	1.3								7-30	10099	1.7	15-30	10118	2.4
32"	800							7-32	10100	1.9	15-32	10119	2.6							
36"	900	00-36	10061	1.0	1A-36	10081	1.6	7-36	10101	2.0	15-36	10120	2.7							
42"	1050	00-42	10062	1.2	1A-42	10082	2.0	7-42	10102	2.2	15-42	10121	3.4							
48"	1200	00-48	10063	1.3	1A-48	10083	2.0	7-48	10103	2.7	15-48	10122	3.8							
60"	1500	00-60	10065	1.7	1A-60	10085	2.7	7-60	10105	3.4	15-60	10124	4.8							
		20			25			27			35			45						
12"	300	20-12	10483	1.3	25-12	10484	1.5	27-12	10485	1.7	35-12	10486	2.8	45-12	10487	3.4				
14"	350	20-14	10130	1.6	25-14	10150	1.6	27-14	10165	2.1	35-14	10180	3.3	45-14	10196	4.0				
16"	400	20-16	10131	1.8	25-16	10151	1.9	27-16	10166	2.3	35-16	10181	3.7	45-16	10197	4.6				
18"	450	20-18	10132	2.0	25-18	10152	2.2	27-18	10167	2.6	35-18	10182	4.1	45-18	10198	5.1				
20"	500	20-20	10133	2.2	25-20	10153	2.4	27-20	10168	3.0	35-20	10183	4.6	45-20	10199	5.6				
22"	550	20-22	10134	2.3	25-22	10154	2.7	27-22	10169	3.1										
24"	600	20-24	10135	2.5	25-24	10155	2.9	27-24	10170	3.4	35-24	10185	5.5	45-24	10201	6.8				
26"	650				25-26	10156	3.1	27-26	10171	3.8										
28"	700	20-28	10137	3.0	25-28	10157	3.5	27-28	10172	3.9										
30"	750	20-30	10138	3.2	25-30	10158	3.6	27-30	10173	4.2	35-30	10188	6.8	45-30	10204	8.5				
32"	800	20-32	10139	3.4				27-32	10174	4.7										
36"	900	20-36	10140	3.8	25-36	10160	4.3	27-36	10175	5.0	35-36	10190	8.2	45-36	10206	10.1				
42"	1050	20-42	10141	4.6	25-42	10161	5.1	27-42	10176	5.9	35-42	10191	9.6	45-42	10207	11.8				
48"	1200	20-48	10142	5.0	25-48	10162	5.7	27-48	10177	6.6	35-48	10192	11.0	45-48	10208	13.4				
54"	1350				25-54	10163	6.5	27-54	10178	7.5	35-54	10193	12.4							
60"	1500	20-60	10144	6.3	25-60	10164	7.1	27-60	10179	8.2	35-60	10194	13.6	45-60	10210	16.8				
		55			65															
12"	300	55-12	10488	4.8	65-12	10489	5.7													
14"	350	55-14	10212	5.7																
16"	400	55-16	10213	6.5																
18"	450	55-18	10214	7.2	65-18	10232	8.8													
20"	500	55-20	10215	7.9																
24"	600	55-24	10217	9.6	65-24	10235	11.5													
30"	750	55-30	10220	11.8	65-30	10238	14.6													
36"	900	55-36	10222	14.0	65-36	10240	17.3													
42"	1050	55-42	10223	16.6																
48"	1200	55-48	10224	19.2	65-48	10242	23.0													
60"	1500	55-60	10226	23.7	65-60	10244	28.8													

ALLIGATOR®
LACING

CARTON CONTENTS:

100


Any lengths over 60" are sold by the set.

- ☐ **Stock Items** (non-shaded) carried in factory inventory.
- ☐ **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.
- Non-Listed Items** are available. Request quote for price and delivery.

ALLIGATOR® LACING

CARTON CONTENTS:

- 4 Sets Lacing
- 4 Hinge Pins
- 1 Gauge Pin
- Required amount of clips

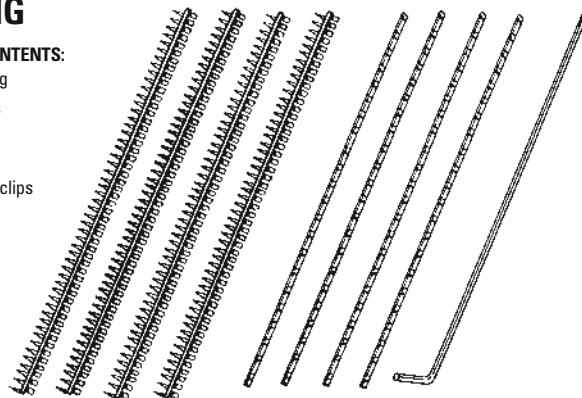

Alligator® Conveyor Belt Lacing



FASTENERS

316 STAINLESS LACING WITH 300 SERIES STAINLESS CORRUGATED HINGE PINS

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	00S			1S			1BS			7S			15S		
12"	300	00S-12	10528	.2	1S-12	10545	.5	Note: Size 1S and 1BS Alligator lacing has been modified to allow for complete interchangeability. For machine applied lacing, order the corresponding 1S size.			7S-12	10562	.7	15S-12	10491	1.1
14"	350	00S-14	10529	.5	1S-14	10546	.5				7S-14	10563	.9	15S-14	10579	1.1
16"	400	00S-16	10530	.4	1S-16	10547	.8				7S-16	10564	1.0	15S-16	10580	1.4
18"	450	00S-18	10531	.5	1S-18	10548	.9				7S-18	10565	1.1	15S-18	10581	1.5
20"	500	00S-20	10532	.7	1S-20	10549	1.0				7S-20	10566	1.2	15S-20	10582	1.7
24"	600	00S-24	10534	.7	1S-24	10551	1.1				7S-24	10568	1.4	15S-24	10584	2.0
28"	700										7S-28	10570	1.6	15S-28	10586	2.1
30"	750	00S-30	10537	.8	1S-30	10554	1.4				7S-30	10571	1.8	15S-30	10587	2.5
36"	900	00S-36	10539	1.0	1S-36	10556	1.7				7S-36	10573	2.1	15S-36	10589	2.9
42"	1050	00S-42	10540	1.0	1S-42	10557	2.0				7S-42	10574	2.5	15S-42	10590	3.5
48"	1200	00S-48	10541	1.4	1S-48	10558	2.1	7S-48	10575	2.7	15S-48	10591	3.9			
54"	1350				1S-54	10559	3.1									
60"	1500	00S-60	10543	1.7	1S-60	10560	2.8									
		20S			25S			27S			35S			45S		
12"	300	20S-12	10492	1.4	25S-12	10493	1.5	27S-12	10494	1.8	35S-12	10495	2.9	45S-12	10496	3.4
14"	350	20S-14	10595	1.6	25S-14	10611	1.8	27S-14	10627	2.1	35S-14	10643	3.4			
16"	400	20S-16	10596	1.8	25S-16	10612	2.0	27S-16	10628	2.4	35S-16	10644	3.9			
18"	450	20S-18	10597	2.0	25S-18	10613	2.2	27S-18	10629	2.7	35S-18	10645	4.2	45S-18	10661	5.2
20"	500	20S-20	10598	2.2	25S-20	10614	2.5	27S-20	10630	3.0	35S-20	10646	4.7			
24"	600	20S-24	10600	2.6	25S-24	10616	3.0	27S-24	10632	3.1	35S-24	10648	5.6	45S-24	10664	7.0
30"	750	20S-30	10603	3.3	25S-30	10619	3.7	27S-30	10635	4.5	35S-30	10651	7.0	45S-30	10667	8.2
36"	900	20S-36	10605	3.9	25S-36	10621	4.5	27S-36	10637	5.3	35S-36	10653	8.4	45S-36	10669	10.4
42"	1050	20S-42	10606	4.6	25S-42	10622	4.9	27S-42	10638	6.2	35S-42	10654	10.2	45S-42	10670	11.9
48"	1200	20S-48	10607	5.2	25S-48	10623	5.8	27S-48	10639	7.1	35S-48	10655	11.1	45S-48	10671	13.9
60"	1500	20S-60	10609	6.6	25S-60	10625	7.4	27S-60	10641	8.7	35S-60	10657	14.0			
		55S														
18"	450	55S-18	10677	7.3												
24"	600	55S-24	10680	9.7												
30"	750	55S-30	10683	12.0												
36"	900	55S-36	10685	16.8												
48"	1200	55S-48	10687	19.2												

☐ **Stock Items** (non-shaded) carried in factory inventory.
☐ **Made To Order Items** (shaded) allow one week for production.
 In most cases, the next standard stock item can be adapted to meet your requirements.
Non-Listed Items are available.
 Request quote for price and delivery.



Alligator® Conveyor Belt Lacing

EXTRA HINGE PINS



STEEL (H) CORRUGATED HINGE PINS – PACKAGES OF 10 PINS

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	For 00			For 1 or 7			For 15			For 20		
6	150	00H6	10030	.1	1&7H6	10031	.1						
12	300	00H12	11075	.1	1&7H12	11092	.1	15H12	10033	.2	20H12	10034	.3
18	450	00H18	11078	.1	1&7H18	11095	.2	15H18	11126	.4	20H18	11142	.4
24	600	00H24	11081	.1	1&7H24	11098	.2	15H24	11129	.5	20H24	11145	.6
30	750	00H30	11084	.2	1&7H30	11101	.3	15H30	11132	.6	20H30	11148	.7
36	900	00H36	11086	.2	1&7H36	11103	.3	15H36	11134	.8	20H36	11150	.9
48	1200	00H48	11088	.2	1&7H48	11105	.5	15H48	11136	1.1	20H48	11152	1.2
60	1500	00H60	11090	.3	1&7H60	11107	.5	15H60	11138	1.2	20H60	11154	1.5
		For 25 or 27			For 35			For 45			For 55 or 65		
12	300	25&27H12	10035	.4	35H12	10037	.6	45H12	10038	.9			
18	450	25&27H18	11157	.7	35H18	11187	1.0						
24	600	25&27H24	11160	.8	35H24	11190	1.3	45H24	11205	1.7	55&65H24	11220	2.8
30	750	25&27H30	11163	1.1	35H30	11193	1.5						
36	900	25&27H36	11165	1.2	35H36	11195	1.8	45H36	11210	2.6	55&65H36	11225	4.3
48	1200	25&27H48	11167	1.8	35H48	11197	2.5	45H48	11212	3.8	55&65H48	11227	5.6
60	1500	25&27H60	11169	2.4	35H60	11199	3.2	45H60	11214	4.4	55&65H60	11229	7.4

STAINLESS (SH) CORRUGATED HINGE PINS – 300 SERIES – PACKAGES OF 10 PINS

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	For 00			For 1 or 7			For 15			For 20		
12	300				1&7SH12	11846	.1						
18	450				1&7SH18	11849	.2	15SH18	11878	.4			
24	600	00SH24	11831	.1	1&7SH24	11852	.2	15SH24	11881	.5	20SH24	11906	.5
30	750				1&7SH30	11855	.3	15SH30	11884	.7	20SH30	11909	.7
36	900	00SH36	11836	.2	1&7SH36	11857	.4	15SH36	11886	.8	20SH36	11911	.9
48	1200	00SH48	11838	.2	1&7SH48	11859	.4	15SH48	11888	.9	20SH48	11913	1.2
60	1500	00SH60	11840	.3	1&7SH60	11861	.5	15SH60	11890	1.0			
		For 25 or 27			For 35			For 45			For 55 or 65		
12	300	25&27SH12	11925	.4	35SH12	11950	.7						
18	450	25&27SH18	11928	.7									
24	600	25&27SH24	11931	.9	35SH24	11956	1.2				55&65SH24	11998	2.8
30	750	25&27SH30	11934	1.2	35SH30	11959	1.6						
36	900	25&27SH36	11936	1.4	35SH36	11961	2.0	45SH36	11982	2.8			
48	1200	25&27SH48	11938	1.7	35SH48	11963	2.6	45SH48	11984	4.3			
60	1500	25&27SH60	11940	2.0									

EXTRA CLIPS

6 CLIPS PER PACKAGE

FASTENER SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
1, 7	1 & 7 CLIP	13256	.03
15, 20	15 & 20 CLIP	13250	.03
25, 27	25 & 27 CLIP	13252	.04
35	35 CLIP	13253	.04
45	45 CLIP	13254	.04

Alligator® Transmission Belt Lacing



FASTENERS

ORDERING NUMBER	ITEM CODE	SETS /BOX	WT. LBS.	STRIP LENGTH	
STEEL				in.	mm
00	10000	6	.2	6"	150
1A	10001	6	.3	6"	150
7	10002	6	.5	6"	150
15	10003	4	.9	12"	300
20	10004	4	1.2	12"	300
25D	10005	4	1.4	12"	300
25G	10007	8	2.6	12"	300
27K	10008	4	1.7	12"	300
27L	10009	8	3.2	12"	300
35N	10011	4	2.7	12"	300
45U	10012	4	3.3	12"	300
55V	10013	4	4.7	12"	300
65X	10014	4	5.8	12"	300

ORDERING NUMBER	ITEM CODE	SETS /BOX	WT. LBS.
STAINLESS (TYPE 316)			
00S	10512	6	.2
1AS	10513	6	.3
7S-TRANS	10514	6	.5
15S	10515	4	.9
20S	10516	4	1.2
25DS	10517	4	1.5
27KS	10519	4	1.8
35NS	10521	4	2.8
45US	10522	4	3.4
55WS	10523	4	5.0

ECONOMY PACKAGES – 12" Strips

ORDERING NUMBER	ITEM CODE	SETS /BOX	WT. LBS.
15E	10020	10	3.2
20E	10021	10	4.2
25E	10022	10	4.8
27E	10023	10	5.8
35E	10024	10	8.3


TRANSMISSION BELT LACING

CARTON CONTENTS:

Fastener Sets as indicated above:
 Sizes #00, 1 and 7 are 6" strips.
 Sizes #15 through 65 are 12" strips.


Rocker Hinge Pins (Sizes 00, 1A, 7, 00S, 1AS and 7S come with Corrugated Hinge Pins.)

1 Gauge Pin

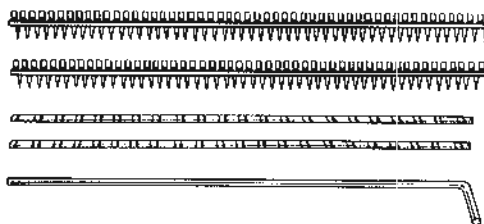

ROCKER HINGE PINS (EXTRA-20/PACKAGE) FOR TRANSMISSION BELT LACING


ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	WT. LBS.
STEEL (RH)		STAINLESS (SRH)		
15RH12	12375			.3
20RH12	12376	20SRH12	12388	.3
		25SRH12	12389	.4
27RH12	12378			.5
35RH12	12379			.6
45RH12	12380			.8
55&65RH12	12381			1.3

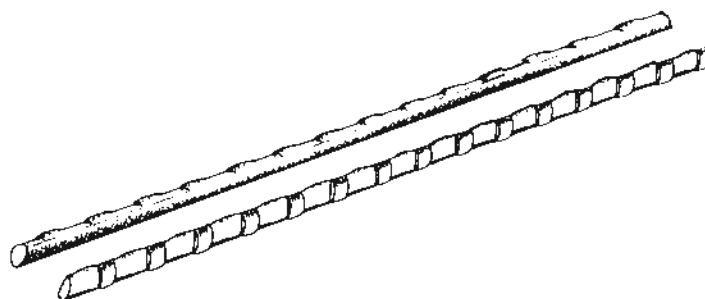

☐ **Stock Items** (non-shaded) carried in factory inventory.

☐ **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.



How Alligator® Ready Set™ Staple Fasteners Work

Designed for light and medium duty synthetic carcass belting, the Alligator® Staple fastener utilizes high tensile, stainless steel staple attachment, in conjunction with an extended plate design. This design separates the point of fastener penetration from the line of belt flexing to eliminate splice fatigue at the point of belt attachment.

Staple fasteners are furnished in strips with a bridge between each fastener plate. This strip design minimizes the chance of individual parts dislodging into the conveyed

product. The one piece design provides a stronger splice, greater resistance to impact damage, and a smoother, unrippled joint that simplifies hinge pin insertion.

Staples are hammer driven through the fastener and belt, working between the carcass fibers without severing them. The staples are then clinched cross-wise to the belt, so that belt tension does not pull against the staples to unclinch them.

Applications	Installation Method	What You Need for Installation
- Package and Parts Handling - Cased Goods - Food - Wood - Agricultural Products	A portable, lightweight application tool is easily carried to the job for on-site installation. The tool holds belt and fastener while staples are set with a hammer and a staple driver.	- Fasteners - Hinge Pin - Installation Tool - Staple Driver 1 lb. Hammer
How to Specify the Correct Alligator® Staple Fastener	Fastener Metal Selection	Hinge Pin Selection
- Determine Belt Tension (PIW). - Measure your Belt Thickness. - Measure the Diameter of the Smallest Pulley in your Drive with Belt Wrap more than 90°. - Choose the fastener size that is appropriate for your specifications in the selection chart below.	Steel. Standard fastener material. Stainless Steel. Type 316 Stainless Steel provides extra resistance to abrasion, magnetic attraction, and corrosion from acids and chemicals. Type 430 Magnetic Stainless Steel (Sizes 62 and 125). MegAlloy®. (Sizes 125 and 187) For superior resistance to wear and abrasion.	NC Nylon Covered Steel Cable - for use with steel fasteners, flat or troughed belts. NCS Nylon Covered Stainless Steel Cable - for applications with stainless fasteners, flat or troughed belts. SP Steel Spring Wire - for use with steel fasteners in abrasive or gritty material applications, flat belts only. SS Stainless Steel Spring Wire - for use with stainless fasteners, flat belts only.

Alligator® Ready Set™ Staple Fasteners Selection Chart

Fastener Size	Operating Tension Range		Belt Thickness Range		Min. Pulley Diameter		Approx. Hinge Pin Diameter	
	P.I.W.	kN/m	in.	mm	in.	mm	in. (nylon-steel)	mm (nylon-steel)
RS62	100	17	1/16-1/8	1.5-3.2	2	50	nylon .080, steel .080	nylon 2.0, steel 2.0
RS125	160	28	1/8-3/16	3.2-4.8	3	75	nylon .141, steel .141	nylon 3.6, steel 3.6
RS187	200	35	3/16-1/4	4.8-6.4	4	102	nylon .203, steel .187	nylon 5.2, steel 4.7

Alligator® Ready Set™ Staple Fasteners



FASTENERS

STEEL

RS62	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	WITH NYLON COVERED STEEL CABLE PINS (NC)		
	12"	300	RS62J12/300NC	54476	1.3
	16"	400	RS62J16/400NC	54477	1.8
	18"	450	RS62J18/450NC	54478	2.0
	20"	500	RS62J20/500NC	54479	2.2
	24"	600	RS62J24/600NC	54480	2.7
	30"	750	RS62J30/750NC	54481	3.4
	36"	900	RS62J36/900NC	54482	4.0
	42"	1050	RS62J42NC	54485	4.7
	48"	1200	RS62J48NC	54483	5.4
	60"	1500	RS62J60NC	54484	6.7

STAINLESS (TYPE 316)

ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
WITH STEEL SPRING WIRE PINS (SP)			WITH STAINLESS SPRING WIRE PINS (SS)			WITH NYLON COVERED STAINLESS CABLE PINS (NCS)			WITH NYLON COVERED STAINLESS CABLE PINS (NCS)		
RS62J12/300SP	54486	1.3	RS62SJ12/300SS	54494	1.3	RS62SJ12/300NCS	54505	1.3	RS62SJ12/300NCS	54505	1.3
RS62J18/450SP	54487	2.0	RS62SJ18/450SS	54495	2.0	RS62SJ18/450NCS	54506	2.0	RS62SJ18/450NCS	54506	2.0
RS62J20/500SP	54492	2.2	RS62SJ20/500SS	54496	2.2	RS62SJ24/600NCS	54507	2.7	RS62SJ24/600NCS	54507	2.7
RS62J24/600SP	54488	2.7	RS62SJ24/600SS	54497	2.7	RS62SJ30/750NCS	54504	3.4	RS62SJ30/750NCS	54504	3.4
RS62J30/750SP	54493	3.4	RS62SJ30/750SS	54498	3.4	RS62SJ36/900NCS	54508	4.0	RS62SJ36/900NCS	54508	4.0
RS62J36/900SP	54489	4.0	RS62SJ36/900SS	54499	4.0	RS62SJ48NCS	54509	5.4	RS62SJ48NCS	54509	5.4
RS62J42SP	54502	4.7	RS62SJ42SS	54503	4.7	RS62SJ60NCS	54510	6.7	RS62SJ60NCS	54510	6.7
RS62J48SP	54490	5.4	RS62SJ48SS	54500	5.4						
RS62J60SP	54491	6.7	RS62SJ60SS	54501	6.7						

CARTON CONTENTS:

- 4 Fastener Sets
- 4 Hinge Pins
- Required Amount of Retaining Washers

STEEL

RS125	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	WITH NYLON COVERED STEEL CABLE PINS (NC)		
	4"	100	RS125J4NC*	54513	1.6
	10"	250	RS125J10NC	54514	1.7
	12"	300	RS125J12/300NC	54515	1.9
	14"	350	RS125J14NC	54516	2.3
	16"	400	RS125J16/400NC	54517	2.5
	18"	450	RS125J18/450NC	54518	2.8
	20"	500	RS125J20/500NC	54519	3.2
	24"	600	RS125J24/600NC	54520	3.7
	30"	750	RS125J30/750NC	54521	4.5
	36"	900	RS125J36/900NC	54522	5.5
	42"	1050	RS125J42NC	54523	6.6
	48"	1200	RS125J48NC	54524	7.4
	60"	1500	RS125J60NC	54525	9.3

STAINLESS (TYPE 316)

ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
WITH STEEL SPRING WIRE PINS (SP)			WITH STAINLESS SPRING WIRE PINS (SS)			WITH NYLON COVERED STAINLESS CABLE PINS (NCS)			WITH NYLON COVERED STAINLESS CABLE PINS (NCS)		
RS125J16/400SP	54528	2.7	RS125SJ12/300SS	54537	1.9	RS125SJ10NCS	54549	1.5	RS125SJ10NCS	54549	1.5
RS125J18/450SP	54529	3.0	RS125SJ14SS	54538	2.5	RS125SJ12/300NCS	54550	1.9	RS125SJ12/300NCS	54550	1.9
RS125J20/500SP	54530	3.4	RS125SJ16/400SS	54539	2.8	RS125SJ14NCS	54551	2.3	RS125SJ14NCS	54551	2.3
RS125J24/600SP	54531	4.0	RS125SJ18/450SS	54540	3.0	RS125SJ16/400NCS	54552	2.5	RS125SJ16/400NCS	54552	2.5
RS125J30/750SP	54532	4.9	RS125SJ20/500SS	54541	3.5	RS125SJ18/450NCS	54553	2.8	RS125SJ18/450NCS	54553	2.8
RS125J36/900SP	54533	6.0	RS125SJ24/600SS	54542	3.9	RS125SJ20/500NCS	54554	3.3	RS125SJ20/500NCS	54554	3.3
RS125J42SP	54536	7.1	RS125SJ30/750SS	54543	4.9	RS125SJ24/600NCS	54555	3.8	RS125SJ24/600NCS	54555	3.8
RS125J48SP	54534	7.8	RS125SJ36/900SS	54544	5.9	RS125SJ30/750NCS	54556	4.8	RS125SJ30/750NCS	54556	4.8
RS125J60SP	54535	10.2	RS125SJ42SS	54547	7.1	RS125SJ36/900NCS	54557	5.5	RS125SJ36/900NCS	54557	5.5
			RS125SJ48SS	54545	8.0	RS125SJ42NCS	54560	6.3	RS125SJ42NCS	54560	6.3
			RS125SJ60SS	54546	10.1	RS125SJ48NCS	54558	7.6	RS125SJ48NCS	54558	7.6
						RS125SJ60NCS	54559	9.4	RS125SJ60NCS	54559	9.4

*10 Sets per Box

STEEL

RS187	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	WITH NYLON COVERED STEEL CABLE PINS (NC)		
	4"	100	RS187J4NC*	54587	2.3
	12"	300	RS187J12/300NC	54588	2.6
	16"	400	RS187J16/400NC	54589	3.7
	18"	450	RS187J18/450NC	54590	4.1
	20"	500	RS187J20/500NC	54591	4.8
	24"	600	RS187J24/600NC	54592	5.5
	30"	750	RS187J30/750NC	54593	6.8
	36"	900	RS187J36/900NC	54594	8.1
	42"	1050	RS187J42NC	54595	9.5
	48"	1200	RS187J48NC	54596	9.9
	60"	1500	RS187J60NC	54597	11.9

STAINLESS (TYPE 316)

ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
WITH STEEL SPRING WIRE PINS (SP)			WITH STAINLESS SPRING WIRE PINS (SS)			WITH NYLON COVERED STAINLESS CABLE PINS (NCS)			WITH NYLON COVERED STAINLESS CABLE PINS (NCS)		
RS187J18/450SP	54598	4.5	RS187SJ12/300SS	54765	3.4	RS187SJ12/300NCS	54616	2.8	RS187SJ12/300NCS	54616	2.8
RS187J20/500SP	54599	5.1	RS187SJ16/400SS	54613	4.0	RS187SJ16/400NCS	54614	3.9	RS187SJ16/400NCS	54614	3.9
RS187J24/600SP	54601	5.9	RS187SJ18/450SS	54606	4.5	RS187SJ18/450NCS	54615	4.3	RS187SJ18/450NCS	54615	4.3
RS187J30/750SP	54603	7.4	RS187SJ20/500SS	54624	5.1	RS187SJ20/500NCS	54621	4.9	RS187SJ20/500NCS	54621	4.9
RS187J36/900SP	54604	9.0	RS187SJ24/600SS	54607	5.9	RS187SJ24/600NCS	54617	5.5	RS187SJ24/600NCS	54617	5.5
RS187J42SP	54605	10.1	RS187SJ30/750SS	54608	7.6	RS187SJ30/750NCS	54618	7.1	RS187SJ30/750NCS	54618	7.1
RS187J48SP	54602	11.5	RS187SJ36/900SS	54609	8.9	RS187SJ36/900NCS	54619	8.4	RS187SJ36/900NCS	54619	8.4
RS187J60SP	54586	14.4	RS187SJ42SS	54610	9.7	RS187SJ42NCS	54622	8.9	RS187SJ42NCS	54622	8.9
			RS187SJ48SS	54611	11.8	RS187SJ48NCS	54620	11.3	RS187SJ48NCS	54620	11.3
			RS187SJ60SS	54612	13.8	RS187SJ60NCS	54715	13.3	RS187SJ60NCS	54715	13.3

*10 Sets per Box

PLEASE NOTE: 310 Alligator Staple is no longer available.

MAGNETIC STAINLESS (TYPE 430)

ORDERING NUMBER	ITEM CODE	WT. LBS.
RS62MJ24/600MS	54473	2.7
RS125MJ24/600MS	54566	3.8

NOTE: Plate, Staples, and Hinge Pins are all Magnetic Stainless Steel.

STAPLE LENGTHS

RS62 = .37" (9.4 mm)
RS125 = .45" (11.4 mm)
RS187 = .52" (13.2 mm)

Stock Items (non-shaded) carried in factory inventory.

Made To Order Items (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.



Alligator® Ready Set™ Staple Fasteners

HINGE PINS (EXTRA)


PACKAGES OF 10 PINS

For 62	COIL LENGTH		ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.								
	Foot	M	NC62 NYLON COVERED STEEL CABLE			NCS62 NYLON COVERED STAINLESS CABLE			in.	mm	SP62 STEEL SPRING WIRE PINS			SS62 300 SERIES STAINLESS SPRING WIRE PINS									
	10'	3	NC62-X	54002	.1	NCS62-X	54005	.1	12"	300	SP62-12/300	54111	.2	SS62-12/300	54148	.2							
	100'	30	NC62-C	54003	1.0	NCS62-C	54006	1.0	16"	400	SP62-16/400	54112	.3	SS62-16/400	54149	.3							
													18"	450	SP62-18/450	54113	.3	SS62-18/450	54150	.3			
												20"	500	SP62-20	54114	.3	SS62-20	54151	.3				
												24"	600	SP62-24/600	54115	.4	SS62-24/600	54152	.4				
												30"	750	SP62-30/750	54116	.5	SS62-30/750	54153	.5				
												36"	900	SP62-36/900	54117	.6	SS62-36/900	54154	.6				
												42"	1050	SP62-42	54118	.7	SS62-42	54155	.7				
												48"	1200	SP62-48	54119	.8	SS62-48	54156	.8				
												54"	1350	SP62-54	54120	1.0	SS62-54	54157	1.0				
												60"	1500	SP62-60	54121	1.0	SS62-60	54158	1.0				
For 125			NC1 NYLON COVERED STEEL CABLE			NCS1 NYLON COVERED STAINLESS CABLE									SS1 300 SERIES STAINLESS SPRING WIRE PINS								
	10'	3	NC1-X	50661	.2	NCS1-X	50665	.2	16"	400	SP1-16/400	50173	.6	SS1-16/400	50413	.6							
	100'	30	NC1-C	50662	1.7	NCS1-C	50666	1.7	18"	450	SP1-18/450	50174	.7	SS1-18/450	50414	.7							
													20"	500	SP1-20	50175	.8	SS1-20	50415	.8			
													24"	600	SP1-24/600	50176	1.0	SS1-24/600	50416	1.0			
												30"	750	SP1-30/750	50178	1.2	SS1-30/750	50418	1.2				
												36"	900	SP1-36/900	50179	1.4	SS1-36/900	50419	1.4				
												42"	1050	SP1-42	50180	1.7	SS1-42	50420	1.7				
												48"	1200	SP1-48	50181	1.9	SS1-48	50421	1.9				
												60"	1500	SP1-60	50183	2.4	SS1-60	50423	2.4				
For 187			NC187 NYLON COVERED STEEL CABLE			NCS187 NYLON COVERED STAINLESS CABLE									SS2 300 SERIES STAINLESS SPRING WIRE PINS								
	10'	3	NC187-X	50669	.2	NCS187-X	50673	.2	18"	450	SP2-18/450	50426	1.3	SS2-18/450	50439	1.3							
	100'	30	NC187-C	50670	4.8	NCS187-C	50674	4.8	20"	500	SP2-20	50427	1.4	SS2-20	50440	1.4							
													24"	600	SP2-24/600	50428	1.7	SS2-24/600	50441	1.7			
													30"	750	SP2-30/750	50430	2.1	SS2-30/750	50443	2.1			
												36"	900	SP2-36/900	50431	2.5	SS2-36/900	50444	2.5				
												42"	1050	SP2-42	50432	2.9	SS2-42	50445	2.9				
												48"	1200	SP2-48	50433	3.4	SS2-48	50446	3.4				
												60"	1500	SP2-60	50435	4.2	SS2-60	50448	4.2				

COMPLETE TOOL KITS

Each kit includes an Installation Tool, Staple Setting Plate, Belt Skiver, Belt Nippers, and a 1 lb. Hammer. Packaged in a durable plastic tool box.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
6" Installation Kit	RSTK4-6	54634	20.5
12" Installation Kit	RSTK4-12	54635	27.7
Extra Tool Box	50009	50009	5.4

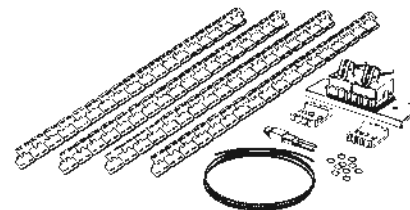

INTRODUCTORY KIT

Each kit includes: 1 RSC187-4 Application Tool, four Joints, RS125-18 Staple Fasteners, and six feet Nylon-covered Hinge Pin (NC) material.

ORDERING NUMBER	ITEM CODE	WT. LBS.
RSAS-1	54633	7.5

Alligator® Ready Set™ Staple Fasteners



INSTALLATION TOOLS



ALLIGATOR® RSC187

(For sizes no. 62, No. 125, and no. 187)

Includes Staple Driver

ORDERING NUMBER	ITEM CODE	WT. LBS.
RSC187	54626	1.3
RSC187-4	54627	4.0
RSC187-6	54628	5.6
RSC187-12	54629	12.8
RSC187-24	54631	20.0

NOTE: To upgrade your old C187 installation tool for use with Ready Set staple fasteners, exchange the green guide block(s) with the yellow (Ready Set) guide block(s) (ST5-5, Item Code 50016).




ALLIGATOR® GOLD CLASS POWER DRIVER

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Power Driver	RS-GOLD-DRIVER	55541	14.0
INITIAL DRIVE BASE			
6" Initial Drive Base	RS-GOLD-INITIAL-6	55542	10.0
12" Initial Drive Base	RS-GOLD-INITIAL-12	55543	15.0
24" Initial Drive Base	RS-GOLD-INITIAL-24	55544	20.0
36" Initial Drive Base	RS-GOLD-INITIAL-36	55548	25.0
48" Initial Drive Base	RS-GOLD-INITIAL-48	55551	30.0
FINAL SET DRIVE BASE			
6" Final Set Drive Base	RS-GOLD-FINAL-6	55545	12.0
12" Final Set Drive Base	RS-GOLD-FINAL-12	55546	17.0
24" Final Set Drive Base	RS-GOLD-FINAL-24	55547	22.0
36" Final Set Drive Base	RS-GOLD-FINAL-36	55549	27.0
48" Final Set Drive Base	RS-GOLD-FINAL-48	55552	32.0
REPLACEMENT PARTS			
Guide Block	ST7-5	55554	8.4
Punch	ST7-9	55555	7.4
Wear Plate (Final Set Base)	ST7-29	55556	2.3
Regulator Hose Assembly	ST7-34	55561	.5
Safety Guard	ST7-35	55562	.1

READY SET STAPLE GUIDE BLOCK

(Includes Cam Lever Spring)

ORDERING NUMBER	ITEM CODE	WT. LBS.
ST5-5	50016	.2



ALLIGATOR® QUAD STAPLE DRIVER

(DRIVES FOUR STAPLES AT ONE TIME)

ORDERING NUMBER	ITEM CODE	WT. LBS.
ST6-9	50201	.5



STAPLE SETTING PLATE

ORDERING NUMBER	ITEM CODE	WT. LBS.
ST-28	50249	5.0



12" x 3"


HINGE PIN RETAINING WASHERS-316SS

FOR FASTENER NUMBER	ORDERING NUMBER	ITEM CODE	OUTSIDE DIAMETER	INSIDE DIAMETER	WT. LBS.
62	62-RET-50	54030	1/4"	.10	.1
125	125-RET-50	50053	5/16"	.16	.1
187	187-RET-50	50075	3/8"	.22	.1



ALLIGATOR® HINGE PIN CUTTER

ORDERING NUMBER	ITEM CODE	WT. LBS.
APC-1	50004	.5



HINGE PIN BENDER

(For use with spring wire pins)

ORDERING NUMBER	ITEM CODE	WT. LBS.
PB1	50077	.4




BELT NIPPERS

ORDERING NUMBER	ITEM CODE	WT. LBS.
BN-1	50003	.8




ROUGH-TOP BELT SKIVER

DESCRIPTION/ ORDERING NUMBER	ITEM CODE	WT. LBS.
RTBS Rough Top Skiver	03239	.3



ALLIGATOR® BELT GRINDER

ORDERING NUMBER	ITEM CODE	WT. LBS.
RB-1	30867	.7





Alligator® Ready Set™ Staple Fasteners


MegAlloy®
Staple Fasteners

REPLACEMENT PARTS

FOR RSC187

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Cam Lever Spring	ST5-3	50015	.1
Staple Driver	ST3-9	50200	.3
Mounting Bolt	ST3-13	50226	.1
Cam Locating Pin	ST3-14	50227	.1
Clamp Bar*	ST3-15-6	50231	.1
Anvil with Dowel Pins (Short)*	ST4-21	50238	.7
Anvil with Dowel Pins (Long)*	ST4-21H	50239	.7
ReadySet Staple Guide Block for RSC187 (yellow)	ST5-5	50016	.2
Cam Lever Assembly (Short)	ST4-8	50243	.1
Cam Lever Assembly (Long)*	ST4-8H	50244	.1
Comb 125/187 (Green)	ST4-16	50248	.3
Comb 62/125 (Yellow)	ST5-16	54010	.3

*NOTE: ST3-15-6 Clamp Bar, ST4-21H Anvil with Dowel Pins (Long) and ST4-8H Cam Lever Assembly (Long) are for multiple stage C187 tools that are six (6) inches or longer. For single stage C187 tools, order ST4-21 Anvil with Dowel Pins (Short) and the ST4-8 Cam Lever Assembly (Short).

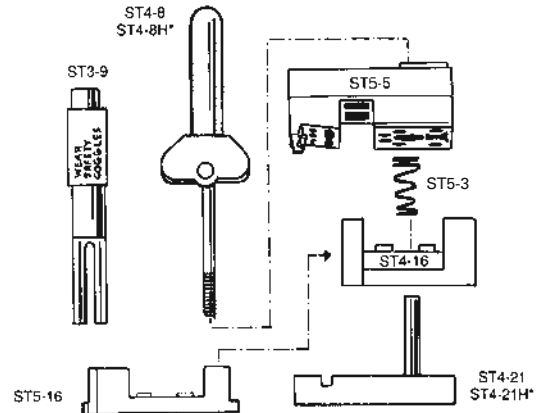

MEGALLOY® STAPLE FASTENERS

MEGALLOY® FASTENERS

(Includes 16-6" fastener strips with staples.

Hinge pins not included)

ORDERING NUMBER	ITEM CODE	WEIGHT LBS.
125MA	50270	1.9
187MA	50272	2.6

INSTALLATION TOOLS STAPLE DISPENSER

ORDERING NUMBER	ITEM CODE	WT. LBS.	FOR SIZE
C150	50025	1.3	125 & 187

EXTRA STAPLES FOR MEGALLOY® FASTENERS

FOR FASTENER NUMBER	ORDERING NUMBER	ITEM CODE	BOX QTY.	WEIGHT LBS.
125	S125	50144	990	.9
187	S187	50146	990	1.0


REPLACEMENT PARTS FOR ALLIGATOR® C187 INSTALLATION TOOL

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Cam Lever Spring	ST3-3	50188	.1
Staple Guide Block -Green*	ST4-5	50240	.2

* For MegAlloy® only.

NOTE: When ordering MegAlloy® Fasteners or bulk ordering lacing with special staple lengths, you must use a green guide block (ST4-5, #50240) with your installation tool. When using loose staples you can order a staple dispenser to speed your installation of this product.

-  **Stock Items** (non-shaded) carried in factory inventory.
-  **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.
- Non-Listed Items** are available. Request quote for price and delivery.



How Alligator® Rivet Fasteners Work


The Alligator® Rivet Fastener system uses the self-setting rivet technology that Flexco developed for the underground mining market. The patented rivets work between the carcass fibers, without severing them, leaving the entire belt carcass intact. The fasteners and rivets of this system are constructed from durable, abrasion-resistant stainless steel for long life.

Because the rivets are self-setting, fasteners are installed quickly from the top side of the belt. Rivets are driven through the fastener plates and the belt, passing between the carcass fibers. The specially-shaped head of each pilot nail works in conjunction with the application tool's anvil plate to set the rivets.

Applications	Installation Method	What You Need for Installation
Hay Baling	Fasteners are installed in one simple procedure with self-setting rivets, using a portable fixture and hammer.	• Fasteners • Rivets • Hinge Pin • Installation Tool • 1 lb. Hammer
How to Specify the Correct Alligator® Rivet Fastener	Fastener Metal Selection	Hinge Pin Selection
Fits most round hay balers. Contact Customer Service for more information.	Stainless Steel. Type 300 Series Stainless Steel.	Steel Corrugated - the standard metal pin. Corrugations retain pin within the splice. Stainless Steel Spring Wire - resists wear and corrosion.

Alligator® Rivet Fastener Selection Chart

Operating Tension Range		Belt Thickness Range		Pulley Diameter		Approx. Hinge Pin Diameter	
P.I.W.	kN/m	in.	mm	in.	mm	in.	mm
300	52	1/8-7/32	3.2-5.6	3-1/2	88	.140	3.6



Alligator® Rivet Fasteners

FASTENERS

(300 SERIES STAINLESS PLATES)

Sold only in case quantities. 10 Packs/case, 10 pack minimum

BELT WIDTH		ORDERING NUMBER	ITEM CODE	UNIT OF MEASURE
in.	mm	WITH STEEL CORRUGATED HEAT-TREATED HINGE PINS		
4	100	ARJ4/100	15000	Package
6	150	ARJ6/150	14983	Package
7	175	ARJ7/175	15001	Package
10	250	ARJ10/250	15002	Package
14	350	ARJ14/350	15003	Package
WITH 300 SERIES STAINLESS SPRING WIRE HINGE PINS				
6	150	ARJ6/150SSI	14995	Package

NOTE: Each package includes fasteners, rivets and hinge pins for 2 complete splices.

HAND APPLICATOR TOOL

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
7" (175 mm) Installation Tool	ART-7	15004	6.9
14" (350 mm) Installation Tool	ART-14	15005	10.1

COMPLETE TOOL KITS - HAND APPLICATOR TOOL

Each kit includes an Installation Tool, Belt Hand Skiver, 1 lb. Hammer, Pin Bender and 2 packages of Alligator Rivet Fasteners. Packaged in a durable plastic tool box.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
7" (175 mm) Installation Kit	ARTK-7	15006	14.5
14" (350 mm) Installation Kit	ARTK-14	15015	18.5

REPLACEMENT HINGE PINS

BELT WIDTH	ORDERING NUMBER	ITEM CODE	QTY. PKG.
in.	mm	ARSH STEEL CORRUGATED HEAT-TREATED HINGE PIN	
4"	100	ARSH4/100	14990 9
6"	150	ARSH6/150	14991 8
7"	175	ARSH7/175	14992 8
10"	250	ARSH10/250	14993 4
14"	350	ARSH14/350	14994 4

NUMBER	ITEM CODE	QTY. PKG.
ARSS1 300 SERIES STAINLESS SPRING WIRE PIN		
ARSS1-4/100	15007	9
ARSS1-6/150	15017	8
ARSS1-7/175	15008	8
ARSS1-10/250	15009	4
ARSS1-14/350	15010	4


NOTE: For nylon covered hinge pins, NC1 or NCS1, see page 32.

EXTRA RIVETS (TYPE 430)

DESCRIPTION	ORDERING NUMBER	ITEM CODE
15/PKG.	AR3-15	15011

ALLIGATOR® BELT GRINDER


ORDERING NUMBER	ITEM CODE	WT. LBS.
RB-1	30867	.7



☐ **Stock Items** (non-shaded) carried in factory inventory.

☐ **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.

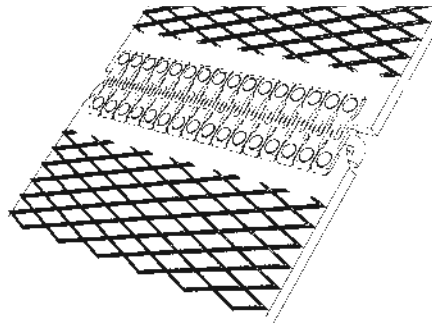

MULTIPLE RIVET INSTALLATION TOOL

Includes tool with guide block, pneumatic punch and hand punch

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
7" (175 mm) Installation Kit	MART-7	15025	9.1
14" (350 mm) Installation Kit	MART-14	15026	12.4
REPLACEMENT PARTS			
Pneumatic Punch	AR1P	15027	.2

NOTE: When using the pneumatic punch, air pressure not to exceed 85 psi.

COMPLETE TOOL KITS - MULTIPLE RIVET INSTALLATION TOOL

Each kit includes a multiple rivet installation tool, guide block with screws, two pneumatic punches, hand punch and air hammer. Packaged in a durable plastic tool box.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
7" (175 mm) Installation Kit	MARTK-7	15032	16.5
14" (350 mm) Installation Kit	MARTK-14	15033	19.7

NOTE: When using the pneumatic punch, air pressure not to exceed 85 psi.




ARSS1



ARSH

REPLACEMENT PARTS

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Punch	AR1P	15027	.20
Guide Block 7"	MARGB-7	15028	1.0
Guide Block 14"	MARGB-14	15029	1.6
Cam Lever Assembly	ART7-7	15012	.1
Cam Lever Spring	ST5-3	50015	.1
Clamp Bar 7"	ART7-5	15013	.8
Clamp Bar 14"	ART14-5	15014	1.3
Guide Block Post	MART-GBPW/S	15031	.1
Guide Block Knob	MART-GBK	15030	.3
Felt Washers (2 per Package)	MART-GBFW	15035	.1



How Alligator® Non-Metallic Fasteners Work

Alligator® Non-Metallic Fasteners are made up of two distinct product lines, the Alligator® Plastic Rivet System and the Alligator® Spiral Lace Fastener System.

The **Alligator® Plastic Rivet Fasteners** were developed to bring the many advantages of mechanical belt fasteners to those applications where metal belt fasteners could not be used. They are external, cover-mounted fasteners employing a one-piece, integrated design with rivets molded into the top plates of the fasteners.

These rivets pass through pre-punched holes and are formed over through our Spin-Set™ technology, compressing the fastener plates and finishing the splice.

The **Alligator® Spiral Lace Fastener** system was designed for small pulley, low-profile applications. The fastener is constructed of polyester webbing, spirals, and hinge pins. It is installed by either insertion between the plies, ply stepping, or finger splicing.

Applications	Installation Method		What You Need for Installation	
• Baggage Handling • Food Processing • X-Ray Equipment • Pharmaceutical	Alligator® Plastic Rivet	Alligator® Spiral Lace	Alligator® Plastic Rivet	Alligator® Spiral Lace
	Pass through pre-punched holes and are Spin-Set™, compressing the fastener plates and finishing the splice.	• Ply Insertion • Ply Stepping • Finger Splice	• Fasteners • Hinge Pin • Belt Punch • Templet • Curling Bit • Comb Assembly • MDT-1 • Installation Tool	• Spiral Lace • Hinge Pin • Adhesive Enhancer • Film • Splicing Press
How to Specify the Correct Alligator® Non-Metallic Fastener	Fastener Selection		Hinge Pin Selection	
1. Determine Belt Tension (PIW). 2. Measure your Belt Thickness. 3. Measure the Diameter of the Smallest Pulley in your Drive with Belt Wrap more than 90°. 4. Choose the fastener size that is appropriate for your specifications in the selection chart below.	Alligator® Plastic Rivet	Alligator® Spiral Lace	Alligator® Plastic Rivet	Alligator® Spiral Lace
	Nylon.	Polyester.	Nylon.	Polyester.

Alligator® Plastic Rivet Fastener Selection Chart

Fastener Size	For Belts With Mechanical Fastener Ratings Up To:		Belt Thickness Range		Recommended Min. Pulley Diameter		Approx. Hinge Pin Diameter	
	P.I.W.	kN/m	in.	mm	in.	mm	in.	mm
APF-100	40	7	Up thru 3/32	Up thru 2.4	1-1/2	38	.096	2.5
APF-150	65	11	1/16-1/8	1.6-3.2	3	75	.136	3.5

Alligator® Spiral Lace Fastener Selection Chart

Fastener Size	Approx. Belt Thickness Range		Min. Pulley/Nose Bar		Approx. Operating Tension		Max. Operating Temperature		Approx. Pin Dia.	
	in.	mm	in.	mm	P.I.W.	kN/m	Degrees F	Degrees C	in.	mm
ASL60	1/32-1/8	.8-3.2	1/2	12.7	50	8.7	300	150	.035	.9
ASL90	1/8-3/16	3.2-4.6	5/8	15.3	50	8.7	300	150	.047	1.2
ASL50	1/32-1/8	.8-3.2	n/a	10	50	8.7	300	150	.040	1.0




Alligator® Non-Metallic Fasteners

PLASTIC RIVET

FASTENERS Includes Fasteners & Hinge Pin to make one splice

	BELT WIDTH		DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm				
100	24	600	White	APF100W-50	80013	0.44
	48	1200	White	APF100W-100	80014	0.63
	24	600	Black	APF100B-50	80017	0.44
	48	1200	Black	APF100B-100	80018	0.63
	24	600	Blue	APF100BLUE-50	80023	0.44
	48	1200	Blue	APF100BLUE-100	80024	0.63
150	24	600	White	APF150W-50	80011	0.56
	48	1200	White	APF150W-100	80012	1.00
	24	600	Black	APF150B-50	80015	0.56
	48	1200	Black	APF150B-100	80016	1.00
	24	600	Blue	APF150BLUE-50	80026	0.56
	48	1200	Blue	APF150BLUE-100	80027	1.00

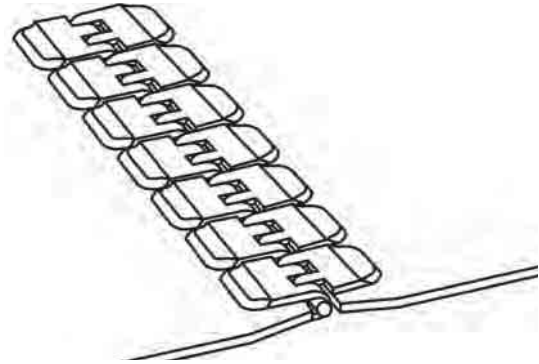

BULK FASTENERS

Recloseable plastic pail contains 500 fasteners - no Hinge Pins.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
White	APF100W-500	80019	1.35
Black	APF100B-500	80021	1.35
Blue	APF100BLUE-500	80025	1.35
White	APF150W-500	80020	2.14
Black	APF150B-500	80022	2.14
Blue	APF150BLUE-500	80028	2.14



BULK FASTENERS

HINGE PINS

FASTER SIZE	LENGTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	Foot	Meter			
APF100	10	3	NL250-X	80203	0.22
APF100	100	30	NL250-C	80204	2.20
APF150	10	3	NL350-X	80201	0.08
APF150	100	30	NL350-C	80202	0.80

INSTALLATION TOOLS

MOTOR DRIVEN INSTALLATION TOOL


(Required for Installation)

Does not include Comb Assembly or Temple. Purchase separately.

VOLTAGE	ORDERING NUMBER	ITEM CODE	WT. LBS.
110V	MDT-1	80110	31.0
220V-50 Cycle	MDT220-1	80111	35.0



MDT-1



S100B


CURLING BIT (Required for Installation)

FASTER SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
APF100	S100B	80075	0.06
APF150	S150B	80076	0.06

COMB ASSEMBLY (Required for Installation)

Includes Gauge Pin


LENGTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
12	300	PCA7-300	80099	5.0
24	600	PCA7-600	80100	9.0
Clamp Knob Assembly			80150	0.1

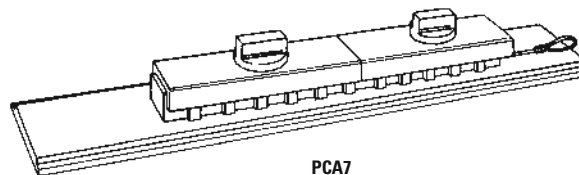

PCA7

- Stock Items** (non-shaded) carried in factory inventory.
- Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.
- Non-Listed Items** are available. Request quote for price and delivery.

Alligator® Non-Metallic Fasteners




100T

TEMPLATES

LENGTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in	mm			
FOR APF100 FASTENERS				
12	300	100T-300	80042	0.70
24	600	100T-600	80043	1.38
36	900	100T-900	80044	1.81
48	1200	100T-1200	80045	2.50
FOR APF150 FASTENERS				
12	300	150T-300	80038	0.69
24	600	150T-600	80039	1.25
36	900	150T-900	80040	1.81
48	1200	150T-1200	80041	2.38

BELT PUNCH

FASTENER SIZE	HOLE DIAMETER	ORDERING NUMBER	ITEM CODE	WT. LBS.
APF100	.130	A100P	80078	0.06
APF150	.156	A150P	80079	0.06




A100P

PLASTIC RIVET LUBE

ORDERING NUMBER	ITEM CODE	WT. LBS.	PKG. QTY.
PRL4	80090	0.38	1

ALLIGATOR® SPIRAL LACE FASTENERS (Hinge Pin included)

LENGTH		ORDERING NUMBER	ITEM CODE	WT LBS.	ORDERING NUMBER	ITEM CODE	WT LBS.
Foot	Meter						
WHITE – SINGLE WEB					BLACK – SINGLE WEB		
10	3	ASL50/3	19460	0.6			
10	3	ASL60/3	19461	0.7	ASLB60/3	19486	0.7
33	10	ASL60/10	19462	2.2			
100	30	ASL60/30	19463	6.4	ASLB60/30	05463	6.4
10	3	ASL90/3	19466	0.9	ASLB90/3	19485	0.9
33	10	ASL90/10	19467	2.4			
100	30	ASL90/30	19468	6.8	ASLB90/30	19491	6.8
10	3	ASL160/3	19483	1.1			
10	3	ASL190/3	19484	1.1			
WHITE – DOUBLE WEB					BLACK – DOUBLE WEB		
10	3	ASL60D/3	19476	1.0			
33	10	ASL60D/10	19477	2.5			
100	30	ASL60D/30	19478	6.8			
10	3	ASL90D/3	19479	1.2	ASLB90D/3	19489	1.2
33	10	ASL90D/10	19480	2.8	ASLB90D/10	19490	2.8
100	30	ASL90D/30	19481	7.5	ASLB90D/30	19494	7.5

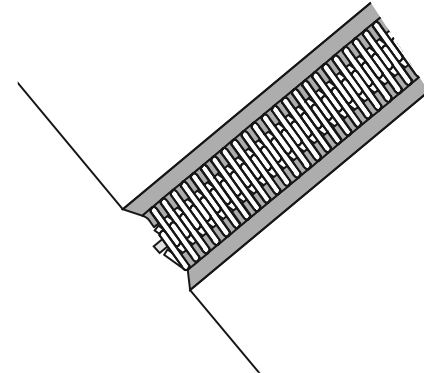

REPLACEMENT HINGE PINS

Bulk Hinge Pin material - 100' / coil

ORDERING NUMBER	ITEM CODE	WT. LBS.	PRICE
ASLHP60-C	19473	0.5	
ASLHP90-C	19474	0.6	
ASLHP80-C	19475	0.6	

LEADER PINS

Note: Custom lengths available.

DESCRIPTION	ORDERING NUMBER	ITEM CODE
(15-foot pin with 3-foot leader)	POLY035X15FT-W/3FT	05200
(15-foot pin with 3-foot leader)	POLY047X15FT-W/3FT	05201

 **Stock Items** (non-shaded) carried in factory inventory.


 **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.

Light-Duty Belt Maintenance Tools

CLIPPER® 845LD SERIES ALUMINUM BELT CUTTER

DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Cutter Complete for belts up to 1/2" (12mm) thick	36"	900	845836LD	32275	29.0
	48"	1200	845848LD	32276	35.0
	60"	1500	845860LD	32277	40.0
	72"	1800	845872LD	32278	46.0
Wrench Assembly (handle)			820/840WA	32272	2.0
Cutter Blade Kit			845-CBK	32279	0.5
Optional Squaring Device			840SD	32274	2.0
36" Chain Replacement Kit			840-36CL	03772	1.92
48" Chain Replacement Kit			840-48CL	03773	2.40
60" Chain Replacement Kit			840-60CL	03774	3.00
72" Chain Replacement Kit			840-72CL	03775	3.75

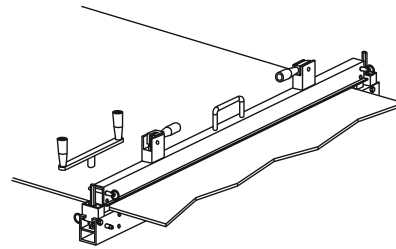


845LD Belt Cutter

900 SERIES* BELT CUTTER

DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Cutter Complete for belts up to 1.5" (38 mm)	24"	600	900924	04200	39.4
	36"	900	900936	04143	39.4
	48"	1200	900948	04144	48.0
	60"	1500	900960	04145	54.0
	72"	1800	900972	04146	60.3
	84"	2130	900984	04147	86.0
Replacement Blade Kit			900CBK	04149	0.15

*Patent pending

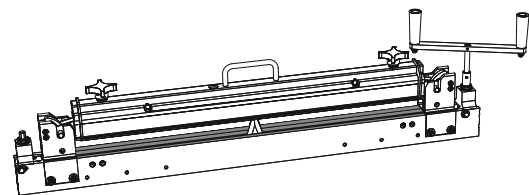


900 Series* Belt Cutter

14" BELT CUTTER

(For Belts up to 3/8" thick.)

DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Cutter Complete	14"	350	Cutter-14	03230	29.0
14" Replacement Blade			Blade-14	03450	0.6
14" Replacement Nylon Block			Block-14	03451	0.2
10" Replacement Blade			Blade-10	03009	0.5
10" Replacement Nylon Block			Block-10	03010	0.2
6" Replacement Blade			Blade-6	03006	0.5
6" Replacement Nylon Block			Block-6	03008	0.2




14" Belt Cutter

#25 BELT CUTTER

(For Belts and Tapes up to 1/8" thick.)

DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
#25 Belt Cutter	6"	125	Cutter-25-26	04101	4.0
#25 Replacement Blades (5/Pkg.)			Blade-25	03012	0.1
#25 Rotary Blade (6" Model)			Blade-25-6	04102	0.1




#25 Belt Cutter

SMART CLAMP™ LIGHT-DUTY BELT CLAMPS

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Complete SmartClamp™ Set*	SMARTCLAMP	04073	45.0

*Patent pending



Smart Clamp™ Light-Duty Belt Clamps

Stock Items (non-shaded) carried in factory inventory.

Made To Order Items (shaded) have added lead time.

Non-Listed Items are available.

Request quote for price and delivery.

Light-Duty Belt Maintenance Tools

PLASTIC HOOK GAUGE

(For proper hook and pin size selection)

DESCRIPTION/ ORDERING NO.	ITEM CODE	WT. LBS.
Clipper-HookGauge	03129	0.1



CARDING PAPER REMOVER

DESCRIPTION/ ORDERING NO.	ITEM CODE	WT. LBS.
Carding Paper Remover	03128	0.1



ROUGH-TOP BELT SKIVER

DESCRIPTION/ ORDERING NO.	ITEM CODE	WT. LBS.
RTBS Rough Top Skiver	03239	0.3



UNIBAR® WIRE CUTTERS


DESCRIPTION/ ORDERING NO.	ITEM CODE	WT. LBS.
Cutter-Unibar Wire	03445	0.5



SILVER INK BELT MARKING PEN

Sold Individually

DESCRIPTION/ ORDERING NO.	ITEM CODE	WT. LBS.
M-4	01350	0.1



LACING ACCESSORY KIT

(Includes Hook Gauge, Carding Paper Remover, Scissors and Rough-Top Belt Skiver)

DESCRIPTION/ ORDERING NO.	ITEM CODE	WT. LBS.
Lacing Accessory Kit	03132	1.0

SCISSORS

DESCRIPTION/ ORDERING NO.	ITEM CODE	WT. LBS.
Clipper Scissors	03244	0.3



Binder

TAPE BINDERS


DESCRIPTION	PINT (0.47 LITER)	
	ORDERING NUMBER	ITEM CODE
Non-Flammable Binder Quick Dry Binder	Binder-PT	03670

QUART (0.95 LITER)	
ORDERING NUMBER	ITEM CODE
Binder-QT	03671
QDBinder-Quart	03704

GALLON (3.79 LITER)	
ORDERING NUMBER	ITEM CODE
Binder-GAL	03672

ALLIGATOR® BELT GRINDER

ORDERING NUMBER	ITEM CODE	WT. LBS.
RB-1	30867	.7




CARD CUTTER

ORDERING NUMBER	ITEM CODE	WT. LBS.
GC-1	18100	.3
EXTRA BLADES (50/Package)		
GCB-50	18101	.8




ALLIGATOR® HINGE PIN CUTTER

ORDERING NUMBER	ITEM CODE	WT. LBS.
APC-1	50004	.5



BELT NIPPERS


ORDERING NUMBER	ITEM CODE	WT. LBS.
BN-1	50003	.8



SMART LOCK™

(Kit includes 20 Smart Locks and 5' of .109" Duralink® cable.
Compatible Hook sizes 2-7)

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Smart-Lock-Kit	Smart Lock	03442	0.2
Individual Smart Locks	Smart Lock	03441	

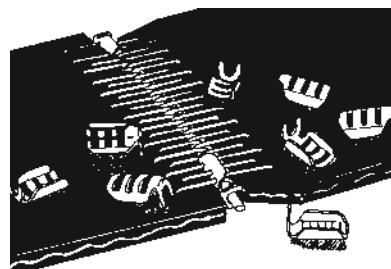

Smart Locks



Novitool® General Information

The Novitool® line of belt fabrication equipment is designed to enhance productivity in the workshop and on-site. Intended for use with light and medium weight thermoplastic conveyor belting, each splicing press, ply-separator, and punch employs market-driven innovations.

The quality build and contemporary design of Novitool® products are recognized worldwide. Experienced belt fabricators will appreciate the simplicity of operation and premium finished results, which are standards of all Novitool® products.

Product	Features	Benefits
Aero™ Press	• Integrated Temperature Controls • Integrated Compressor • Integrated Air Cooling • Integrated Variable Power Supply • Flight Case Included	• 7-12 Minute Splicing Times • All-in-One Simplicity • No External Controller • No External Water Tanks • Lightweight and Portable
Ply 130™ Ply Separator	• One Adjustment for Splitting Position • One Adjustment for Splitting Depth • Easy to Read Position Rulers • Shielded Rollers and Cutting Blade • Robust Rigid Construction	• Easy to Determine Splitting Position • Excellent Splitting Repeatability • Split Films Down to .014" (35 mm) • Ideal for Thin, Lightweight Urethanes • Safe Operation with Shielded Components
Pun M™ Manual Punch	• No External Power Required • Single Movement Belt Clamping • 11,000 lb (50 kN) Punching Force • Open Ended Rigid Construction • Adjustable Stroke for Punching Depth	• Portable for On-site or Workshop Use • Easy One Hand Belt Clamping • Finger and Finger-Over-Finger Punching • No Belt Width Limitations • Simple, Single Lever Punching Action

Novitool® Belt Fabrication Tools

AERO™ SPLICING PRESS


(WITHOUT CORDS*)

BELT WIDTH		ORDERING NUMBER	ITEM CODE
in.	mm		
12	300	AERO-300	08000
24	600	AERO-600	08001
36	900	AERO-900	08002
48	1200	AERO-1200	08003
60	1500	AERO-1500	08004

*Cords sold separately

AERO™ AMPERAGE REQUIREMENTS

	230 volt; single phase	230 volt; 3 phase	460 volt; 3 phase
Aero-300	8	4	4
Aero-600	13	6.5	6.5
Aero-900	16	8	8
Aero-1200	24	12	12
Aero-1500	30	15	15

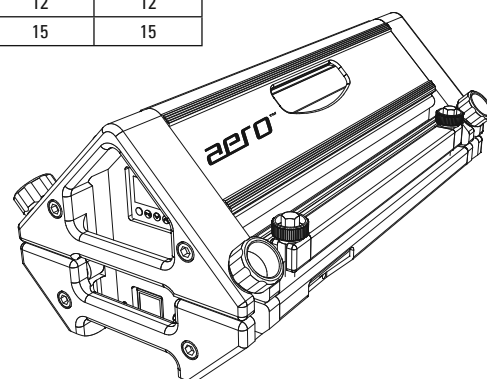

AERO PRESS POWER CORDS

DESCRIPTION	ORDERING NUMBER	ITEM CODE	PLUG END DRAWING	COMPATIBLE WITH
230 VOLT; SINGLE PHASE; 60 HZ				
Cord Only - US	AERO-CABLE-230V1PHU	08006	N/A	Aero 300-1500
Cord with L6-15 plug	AERO-CABLE-230V1PH-L6-15	08033	L6-15P 	Aero 300 and 600
Cord with 6-15 plug	AERO-CABLE-230V1PH-6-15	08032	6-15P 	Aero 300 and 600
Cord with L6-20 plug	AERO-CABLE-230V1PH-L6-20	08035	L6-20P 	Aero 300, 600, or 900
Cord with 6-20 plug	AERO-CABLE-230V1PH-6-20	08034	6-20P 	Aero 300, 600, or 900
Cord with L6-30 plug	AERO-CABLE-230V1PH-L6-30	08037	L6-30P 	Aero 300-1500
Cord with 6-30 plug	AERO-CABLE-230V1PH-6-30	08036	6-30P 	Aero 300-1500
230 VOLT; THREE PHASE; 60 HZ				
Cord Only	AERO-CABLE-230V3PH	08005	N/A	Aero 300-1500
Cord with L15-20 plug	AERO-CABLE-230V3PH-L15-20	08038	L15-20P 	Aero 300-1500
Cord with L15-30 plug	AERO-CABLE-230V3PH-L15-30	08039	L15-30P 	Aero 300-1500
460 VOLT; THREE PHASE; 60 HZ				
Cord Only	AERO-CABLE-460V3PH	08008	N/A	Aero 300-1500
Cord with L16-20 plug	AERO-CABLE-460V3PH-L16-20	08040	L16-20P 	Aero 300-1500
Cord with L16-30 plug	AERO-CABLE-460V3PH-L16-30	08041	L16-30P 	Aero 300-1500

SILICONE PRESS PADS AND CLOTHS


THICKNESS		MATERIAL	LENGTH		COMPATIBLE WITH	ORDERING NUMBER	ITEM CODE
in.	mm		in.	mm			
.020	0.5	Silicone Cloth	12	300	Aero-300	AERO-S10.5-300	08103
.020	0.5	Silicone Cloth	24	600	Aero-600	AERO-S10.5-600	08104
.020	0.5	Silicone Cloth	36	900	Aero-900	AERO-S10.5-900	08105
.020	0.5	Silicone Cloth	48	1200	Aero-1200	AERO-S10.5-1200	08106
.020	0.5	Silicone Cloth	60	1500	Aero-1500	AERO-S10.5-1500	08107
.020	0.5	Silicone Cloth		10M		AERO-S10.5-10M	08108

THICKNESS		MATERIAL	LENGTH		COMPATIBLE WITH	ORDERING NUMBER	ITEM CODE
in.	mm		in.	mm			
.12	3.0	Silicone Pad	12	300	Aero-300	AERO-S13-300	08109
.12	3.0	Silicone Pad	24	600	Aero-600	AERO-S13-600	08110
.12	3.0	Silicone Pad	36	900	Aero-900	AERO-S13-900	08111
.12	3.0	Silicone Pad	48	1200	Aero-1200	AERO-S13-1200	08112
.12	3.0	Silicone Pad	60	1500	Aero-1500	AERO-S13-1500	08113

Novitool® Belt Fabrication Tools

PLY 130™ PLY SEPARATOR

ORDERING NUMBER	ITEM CODE	NEMA PLUG
FLOOR STAND MODEL		
PLY130SA-460V3PH60HZ	08012	no plug
PLY130SA-460V3PH60HZ-L16-20	08049	L16-20
PLY130SA-230V3PH60HZ	08047	no plug
PLY130SA-230V3PH60HZ-L15-20	08051	L15-20
PLY130SA-230V3PH60HZ-L15-30	08052	L15-30
WORK BENCH MODEL		
PLY130WB-460V3PH60HZ	08013	no plug
PLY130WB-460V3PH60HZ-L16-20	08053	L16-20
PLY130WB-460V3PH60HZ-L16-30	08054	L16-30
PLY130WB-230V3PH60HZ	08046	no plug
PLY130WB-230V3PH60HZ-L15-20	08055	L15-20
PLY130WB-230V3PH60HZ-L15-30	08056	L15-30
REPLACEMENT PARTS		
PLY-BL Blade & Jig	08014	N/A
PLY-JG Jig Only	08015	N/A

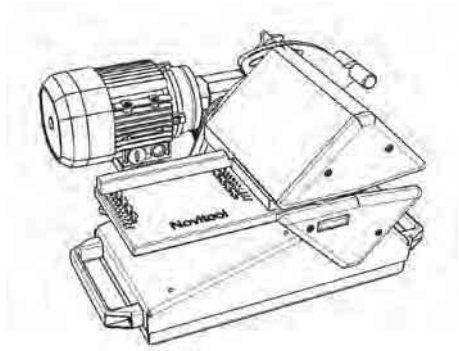


Ply 130™ Work Bench Model


PUN M™ MANUAL PUNCH

ORDERING NUMBER	ITEM CODE
PUN M*	
PUN-M-300	08016
PUN-M-600	08017
PUN-M-900	08018
PUN M 300 PUNCHBOARDS	
PUN-B-50X20-300	08019
PUN-B-70X15-300	08022
PUN-B-80X20-300	08025
PUN M 600 PUNCHBOARDS	
PUN-B-50X20-600	08020
PUN-B-70X15-600	08023
PUN-B-80X20-600	08026
PUN M 900 PUNCHBOARDS	
PUN-B-50X20-900	08021
PUN-B-70X15-900	08024
PUN-B-80X20-900	08027

*Punchboards not included with Pun M; purchase separately.

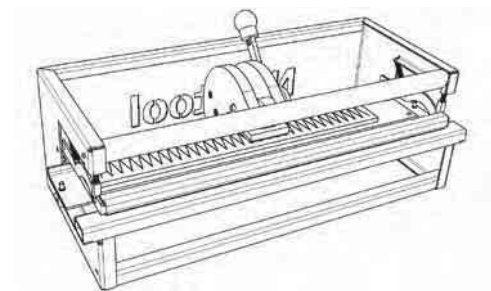

Pun M™ Manual Punch



How Flexco® Bolt Hinged Fasteners Work

Flexco® Bolt Hinged fasteners provide a flexible joint for belts operating over small pulleys. Because the joint is easily separated by simply removing the hinge pin, entire belt sections may be added or eliminated.

Designed as a compression fastener, the Flexco® Bolt Hinged model is fastened to


the belt ends with high strength bolts. The bolts compress the plates into the belt cover. Additional holding capability is provided by the fastener teeth that imbed in the belt without damage to the belt carcass.

This combination distributes the splice tension across the entire plate width while the teeth secure the fastener into the belt carcass to resist pull-out.

Applications	Installation Method	What You Need for Installation
- Construction Equipment - Road Machinery - Coal, Salt, Potash Mines - Stacking and Stockpiling Belts - Other Applications Involving Smaller Pulleys	Fasteners can be installed in the shop or on-site with either simple hand tools or power tools.	- Fastener Plates - Bolts & Nuts - Templet - Belt Punch - Wrench - Bolt Horn - Flexco Installation Tool - Impact Tool or Carpenter's Brace
How to Specify the Correct Flexco® Bolt Hinged Fastener	Fastener Metal Selection	Hinge Pin Selection
- Determine Belt Tension (PIW). - Measure your Belt Thickness. - Measure the Diameter of the Smallest Pulley in your Drive with Belt Wrap more than 90°. - Choose the fastener size that is appropriate for your specifications in the selection chart below.	Steel. For most applications, plated steel is recommended. Stainless Steel. Type 316 Stainless Steel provides extra resistance to abrasion, magnetic attraction, and corrosion from acids and chemicals. MegAlloy®. For superior resistance to wear and abrasion. Everdur®. Spark-free material compared to steel and fully non-magnetic.	NC Nylon Covered Steel Cable - for use with steel fasteners, flat or troughed belts. NCS Nylon Covered Stainless Steel Cable - for applications with stainless fasteners, flat or troughed belts. NAC Nylon Covered Armored Cable - right for many applications, long service life. AC Bare Armored Cable - for extendable conveyors. ACS Bare Armored Stainless Cable - for applications with stainless fasteners, flat or troughed belts. SC Bare Steel Cable - for conveying gritty or abrasive material. SSC Bare Stainless Steel Cable - for corrosion resistance, flat belts. NB Nylon Covered Bronze Cable - for non-magnetic joints.

Flexco® Bolt Hinged Fastener Selection Chart

Fastener Size	For Belts With Mechanical Fastener Ratings Up To:		Belt Thickness Range		Recommended Min. Pulley Diameter			
					Operating Tension 100% of Belt Rating		Operating Tension Under 75% of Belt Rating	
	P.I.W.	kN/m	in.	mm	in.	mm	in.	mm
375X	190	33	1/4-13/32	6-11	6	152	4	102
550	300	52	1/4-5/8	6-16	9	230	7	178



Flexco® Bolt Hinged Fasteners

FASTENERS

Exclusive Piloted Bolt Design Simplifies Installation:

The new piloted bolt is currently being phased in to replace standard bolt designs.
To order the new piloted bolts as they become available, use standard bolt ordering numbers.

STEEL ("J" CARTON – Continuous Strip w/Steel Nuts & Bolts)

375X	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	NC STEEL JOINT WITH NYLON COVERED STEEL CABLE			NCS STEEL JOINT WITH NYLON COVERED STAINLESS CABLE			SC STEEL JOINT WITH BARE STEEL CABLE		
	12"	300	375XJ12NC	40000	2.3						
	14"	350	375XJ14NC	40001	2.6						
	16"	400	375XJ16NC	40002	2.9						
	18"	450	375XJ18NC	40003	3.3	375XJ18NCS	40012	3.3			
	20"	500	375XJ20NC	40004	3.8						
	24"	600	375XJ24NC	40005	4.0	375XJ24NCS	40013	4.0	375XJ24SC	40020	4.0
	26"	650	375XJ26NC	40006	4.5						
	30"	750	375XJ30NC	40007	5.1	375XJ30NCS	40014	5.1			
	36"	900	375XJ36NC	40008	6.3	375XJ36NCS	40015	6.3	375XJ36SC	40023	6.3
	42"	1050	375XJ42NC	40009	7.3	375XJ42NCS	40016	7.3			
	48"	1200	375XJ48NC	40010	8.3	375XJ48NCS	40017	8.3	375XJ48SC	40025	7.7
	60"	1500	375XJ60NC	39997	10.2						

STAINLESS 300 SERIES

("J" CARTON – Continuous Strip w/Stainless Nuts & Bolts)

375X	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	SSC STAINLESS JOINT WITH BARE STAINLESS CABLE			NCS STAINLESS JOINT WITH NYLON COVERED STAINLESS CABLE		
	18"	450				375XSJ18NCS	40035	3.3
	24"	600	375XSJ24SSC	40225	4.0	375XSJ24NCS	40036	4.0
	30"	750	375XSJ30SSC	40226	5.1	375XSJ30NCS	40037	5.1
	36"	900	375XSJ36SSC	40227	6.3	375XSJ36NCS	40038	6.3
	42"	1050	375XSJ42SSC	40228	7.3	375XSJ42NCS	40039	7.3
	48"	1200	375XSJ48SSC	40229	8.3	375XSJ48NCS	40040	8.3
	60"	1500	375XSJ60SSC	39907	10.2			

EVERDUR

("J" CARTON – Continuous Strip w/Everdur Nuts & Bolts)

375X	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	NB EVERDUR JOINT WITH NYLON COVERED BRONZE CABLE		
	18"	450	375XEJ18NB	39978	3.5
	24"	600	375XEJ24NB	39980	4.3
	30"	750	375XEJ30NB	39982	5.4
	36"	900	375XEJ36NB	39984	6.6
	42"	1050	375XEJ42NB	39986	7.7


GAUGE PINS (EXTRA)

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	EACH			10 PER PACKAGE		
18	450				FHGP18	39603	3.0
24	600	FHGP24-1	39624	0.4	FHGP24	39605	3.9
30	750	FHGP30-1	39626	0.5	FHGP30	39607	4.8
36	900	FHGP36-1	39625	0.6	FHGP36	39610	5.8
42	1050	FHGP42-1	39627	0.7	FHGP42	39613	6.7
48	1200	FHGP48-1	39628	0.8	FHGP48	39615	7.7
60	1500	FHGP60-1	39629	1.0	FHGP60	39617	9.6

"J" CARTON

CARTON CONTENTS:

- 2 Strips of fastener
- 2 Pieces Filler Tubing
- 1 Hinge Pin
- 1 Gauge Pin
- 2 Hinge Pin Washers
- Required amount of nuts and bolts
- Required amount of clips for Individual Plate "J" Cartons

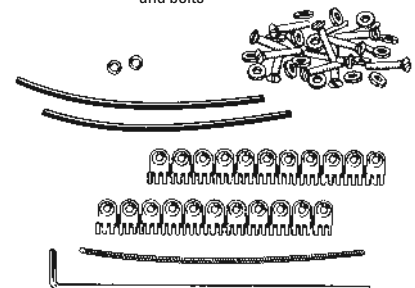

☐ **Stock Items** (non-shaded) carried in factory inventory.

☒ **Made To Order Items** (shaded) allow one week for production.
In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available.
Request quote for price and delivery.

Flexco® Bolt Hinged Fasteners



FASTENERS

STEEL ("J" CARTON – Continuous Strip w/Steel Nuts & Bolts)

550

BELT WIDTH		ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	NC STEEL JOINT WITH NYLON COVERED STEEL CABLE		NCS STEEL JOINT WITH NYLON COVERED STAINLESS CABLE		SC STEEL JOINT WITH BARE STEEL CABLE		SSC STEEL JOINT WITH BARE STAINLESS CABLE		NAC STEEL JOINT WITH NYLON COVERED ARMORED CABLE		
CARTON — One Complete Joint												
18"	450	550J18NC	40138									3.3
20"	500	550J20NC	40046									3.7
24"	600	550J24NC	40047	550J24NCS	40059	550J24SC	40066	550J24SSC	40073	550J24NAC	40242	4.3
26"	650	550J26NC	40048									4.9
30"	750	550J30NC	40049	550J30NCS	40060	550J30SC	40068	550J30SSC	40074	550J30NAC	40243	5.5
36"	900	550J36NC	40050	550J36NCS	40061	550J36SC	40069	550J36SSC	40075	550J36NAC	40244	6.5
42"	1050	550J42NC	40051	550J42NCS	40062	550J42SC	40070	550J42SSC	40076	550J42NAC	40245	7.8
48"	1200	550J48NC	40052	550J48NCS	40063	550J48SC	40071	550J48SSC	40077	550J48NAC	40246	8.8
54"	1350	550J54NC	40053							550J54NAC	40247	9.9
60"	1500	550J60NC	40054									10.5

STAINLESS 300 SERIES

("J" CARTON – Continuous Strip w/Stainless Nuts & Bolts)

550	BELT WIDTH		ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	NCS STAINLESS JOINT WITH NYLON COVERED STAINLESS CABLE		SSC STAINLESS JOINT WITH BARE STAINLESS CABLE		
	CARTON — One Complete Joint						
	18"	450	550SJ18NCS	40164	550SJ18SSC	39675	3.3
	24"	600	550SJ24NCS	40165	550SJ24SSC	39904	4.3
	30"	750	550SJ30NCS	40166	550SJ30SSC	39917	5.5
	36"	900	550SJ36NCS	40167	550SJ36SSC	39935	6.5
	42"	1050	550SJ42NCS	40168	550SJ42SSC	39938	7.8
	48"	1200	550SJ48NCS	40169	550SJ48SSC	39842	8.8
	60"	1500	550SJ60NCS	39939	550SJ60SSC	39855	11.4

MEGALLOY®

("J" CARTON – Individual Plates w/Steel Nuts & Bolts)

550	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	MA MEGALLOY JOINT WITH BARE STAINLESS CABLE		
	CARTON — One Complete Joint				
	18"	450	550MAJ18SSC	39574	3.3
	24"	600	550MAJ24SSC	39577	4.3
	30"	750	550MAJ30SSC	39580	5.5
	36"	900	550MAJ36SSC	39583	6.5
42"	1050	550MAJ42SSC	39586	7.8	
48"	1200	550MAJ48SSC	39589	8.8	

BULK FASTENERS

Per set (with bolts & nuts)

Per container (with bolts and nuts)

Per set (with bolts & nuts)

Per container (with bolts and nuts)

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	SETS/ CTN	WT. LBS.
STEEL							
Two-Plate Fastener	375X-2STS	39950	.3	375X-2	40100	25	8.0
Three-Plate Fastener	375X-3STS	39951	.5	375X-3	40101	18	8.5
Single-Plate Fastener	550-1STS	39952	.3	550-1	40102	50	12.0
Three-Plate Fastener	550-3STS	39953	.8	550-3	40103	18	13.0
MEGALLOY							
Single-Plate Fastener				550MA-1	40058	50	13.0

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	SETS/ CTN	WT. LBS.
STAINLESS 300 SERIES							
Two-Plate Fastener	375XS-2STS	39957	.3	375XS-2	40108	25	6.3
Three-Plate Fastener	375XS-3STS	39958	.5	375XS-3	40109	18	8.1
Single-Plate Fastener	550S-1STS	39959	.3	550S-1	40110	50	12.1
EXTRA CLIPS							
#550 Clips (100/Pkg.)	CLIPS (550)	40134	2.8				

NOTE: Non-listed cartons over 60" (1500 mm) are supplied in single plate sets.

BULK FASTENER SETS

Required for Various Belt Widths

		375X		550	
BELT WIDTH		(RECOMMENDED)		(RECOMMENDED)	
in.	mm	SETS OF 3-PLATE	SETS OF 2-PLATE	SETS OF 3-PLATE	SETS OF 1-PLATE
12"	300	3	1		7
14"	350	3	2		9
16"	400	5			10
18"	450	5	1		11
20"	500	5	2	2	7
24"	600	7		2	8
28"		7	2	2	10
30"	700	7	2	2	11
36"	900	11		2	16
	1000	12		2	18
42"	1050	13		2	20
	1200	15		2	24
48"		15		2	24
	1350	17		2	28
54"		17		2	28
	1500	18	1	2	32
60"		19		2	32
	1800	22	1	2	39
72"		23		2	40
	2100	25	2	2	48
84"		27		2	48
	2400	30	1	2	55
96"		31		2	56
	3000	37	2	2	71
120"		39		2	72



Flexco® Bolt Hinged Fasteners

HINGE PINS



PACKAGES OF 10 PINS

EACH (ONE PIN)

For 375X or 550

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.		
in.	mm	NC NYLON COVERED STEEL CABLE (1/4" dia.)			NCS NYLON COVERED STAINLESS CABLE* (1/4" dia.)			NC NYLON COVERED STEEL CABLE (1/4" dia.)			NCS NYLON COVERED STAINLESS CABLE* (1/4" dia.)				
		12"	300	NC-12	40150	.8	NCS-12	40170	.8	NC-12-1	38000	.1			
		14"	350	NC-14	40151	1.0	NCS-14	40171	1.0	NC-14-1	38001	.1			
		16"	400	NC-16	40152	1.2	NCS-16	40172	1.2	NC-16-1	38002	.1			
		18"	450	NC-18	40153	1.4	NCS-18	40173	1.4	NC-18-1	38003	.1			
		20"	500	NC-20	40154	1.5	NCS-20	40174	1.5	NC-20-1	38004	.2			
		24"	600	NC-24	40155	1.7	NCS-24	40175	1.7	NC-24-1	38005	.2	NCS-24-1	38041	.2
		26"	650	NC-26	40156	1.8									
		30"	750	NC-30	40157	2.2	NCS-30	40177	2.2	NC-30-1	38007	.2	NCS-30-1	38043	.2
36"	900	NC-36	40158	2.6	NCS-36	40178	2.6	NC-36-1	38008	.2	NCS-36-1	38044	.2		
42"	1050	NC-42	40159	3.1	NCS-42	40179	3.1	NC-42-1	38009	.2	NCS-42-1	38045	.3		
48"	1200	NC-48	40160	3.5	NCS-48	40180	3.5	NC-48-1	38010	.3	NCS-48-1	38046	.3		
54"	1350	NC-54	40161	3.9	NCS-54	40181	3.9	NC-54-1	38011	.3	NCS-54-1	38047	.3		
60"	1500	NC-60	40162	4.3	NCS-60	40182	4.3	NC-60-1	38012	.4	NCS-60-1	38048	.4		
72"	1800	NC-72	40163	5.0	NCS-72	40183	5.0	NC-72-1	38013	.4	NCS-72-1	38049	.5		
100 FOOT COILS															
BULK		NC-C	39740	8.6											

in.	mm	NAC NYLON COVERED ARMORED CABLE (1/4" dia.)			AC BARE ARMORED CABLE (1/4" dia.)			NAC NYLON COVERED ARMORED CABLE (1/4" dia.)			AC BARE ARMORED CABLE (1/4" dia.)				
		18"	450	NAC-18	40629	1.8	AC-18	40685	1.7	NAC-18-1	38108	.2	AC-18-1	38129	.2
		24"	600	NAC-24	40631	2.4	AC-24	40686	2.3	NAC-24-1	38109	.2	AC-24-1	38130	.2
		26"	650	NAC-26	40632	2.6	AC-26	40687	2.4	NAC-26-1	38110	.2	AC-26-1	38131	.2
		30"	750	NAC-30	40633	3.0	AC-30	40688	2.8	NAC-30-1	38111	.3	AC-30-1	38132	.3
		36"	900	NAC-36	40634	3.6	AC-36	40689	3.4	NAC-36-1	38112	.3	AC-36-1	38133	.3
		42"	1050	NAC-42	40636	4.2	AC-42	40691	3.8	NAC-42-1	38113	.4	AC-42-1	38134	.4
		48"	1200	NAC-48	40637	4.8	AC-48	40692	4.8	NAC-48-1	38114	.4	AC-48-1	38135	.4
		54"	1350	NAC-54	40638	5.4				NAC-54-1	38115	.5	AC-54-1	38136	.5
60"	1500	NAC-60	40639	6.0				NAC-60-1	38116	.5	AC-60-1	38137	.5		
72"	1800	NAC-72	40640	7.2				NAC-72-1	38117	.6	AC-72-1	38138	.6		

in.	mm	SC BARE STEEL CABLE (1/4" dia.)			SSC BARE STAINLESS CABLE* (7/32" dia.)			SC BARE STEEL CABLE (1/4" dia.)			SSC BARE STAINLESS CABLE* (7/32" dia.)				
		24"	600	SC-24	40202	2.5	SSC-24	40210	2.2	SC-24-1	38180	.2	SSC-24-1	38199	.2
		26"	650	SC-26	40203	2.6				SC-30-1	38182	.3	SSC-30-1	38201	.3
		30"	750	SC-30	40204	3.1	SSC-30	40211	2.5	SC-36-1	38183	.3	SSC-36-1	38202	.3
		36"	900	SC-36	40205	3.7	SSC-36	40212	3.0	SC-42-1	38184	.4	SSC-42-1	38203	.4
		42"	1050	SC-42	40206	4.3	SSC-42	40213	3.5	SC-48-1	38185	.4	SSC-48-1	38204	.4
		48"	1200	SC-48	40207	4.9	SSC-48	40214	4.0						

in.	mm	ACS BARE ARMORED STAINLESS CABLE* (17/64" dia.)			* 300 SERIES			ACS BARE ARMORED STAINLESS CABLE* (17/64" dia.)			NB NYLON COVERED BRONZE CABLE (1/4" dia.)			
		18"	450									NB-18-1	38075	.2
		24"	600									NB-24-1	38077	.2
		30"	750	ACS-30	41354	2.8			ACS-30-1	41380	.2	NB-30-1	38079	.3
		36"	900	ACS-36	41355	3.0			ACS-36-1	41381	.2	NB-36-1	38080	.3
		42"	1050	ACS-42	41356	3.2			ACS-42-1	41382	.2	NB-42-1	38081	.4
		48"	1200	ACS-48	41357	3.5			ACS-48-1	41383	.3			
		54"	1350	ACS-54	41358	3.7			ACS-54-1	41384	.3			
		60"	1500	ACS-60	41359	4.0			ACS-60-1	41385	.4			

 Stock Items (non-shaded) carried in factory inventory.

 Made To Order Items (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.




INSTALLATION TOOLS

CURVED TEMPLETS

BELT WIDTH		ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
in.	mm	375X		550	
12"	300	375X-12	30813	512	30799
14"	350	375X-14	30814		
16"	400	375X-16	30815	516	30800
18"	450	375X-18	30816	518	30801
20"	500	375X-20	30817	520	30802
24"	600	375X-24	30818	524	30803
26"	650	375X-26	30819	526	30804
30"	750	375X-30	30820	530	30805
36"	900	375X-36	30821	536	30806
42"	1050	375X-42	30822	542	30807
48"	1200	375X-48	30823	548	30808
54"	1350	375X-54	30824	554	30809
60"	1500	375X-60	30825	560	30810
72"	1800	375X-72	30826	572	30811


NOTE: All templates up to and including 72" are curved. For belt widths over 72", straight templet supplied.

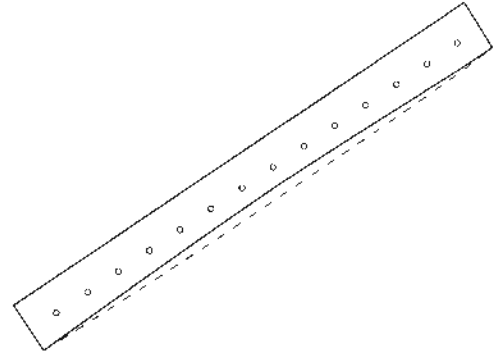

CURVED BELT CUTTERS

DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Cutter Complete	30"	750	400430	30914	14.2
	36"	900	400436	30915	16.1
	42"	1050	400442	30916	18.9
	48"	1200	400448	30917	19.0
	60"	1500	400460	30918	23.0
Cutter Base Only	30"	750	430	30950	5.4
	36"	900	436	30951	6.2
	42"	1050	442	30952	7.1
	48"	1200	448	30953	7.9
	60"	1500	460	30954	9.6
Cutter Head Only			400	30919	5.1
Cutter Blade			30023	30909	.2
Cutter Blade (Long)			30023L	30913	.2
Nails for Cutter Base (142 per package)			6D	30436	1.0

NOTE: Belt widths over 72" require straight cutters.
Please refer to Page 70 for 300 series straight cutters.

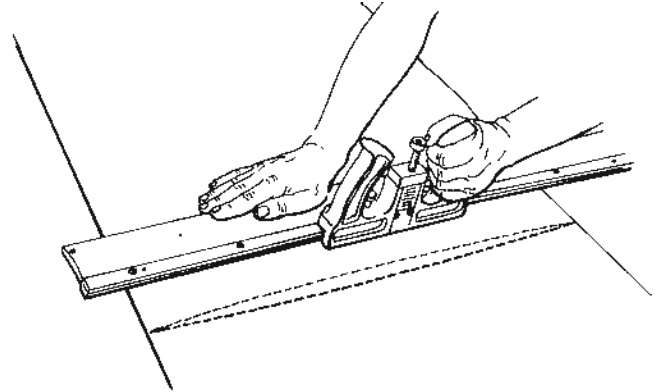

EXTRA BOLTS & NUTS

100 PER BOX – BOLT DIMENSION IS 1/4" X 1-11/16"

FOR FASTENER NUMBER	ORDERING NUMBER / ITEM CODE	WT. LBS.
BOLTS—STEEL		
375X	20398	2.1
550	20399	2.4
BOLTS—STAINLESS		
375X/550	20400	2.3
BOLTS—EVERDUR		
375X/550	20397	2.4

FOR FASTENER NUMBER	ORDERING NUMBER / ITEM CODE	WT. LBS.
NUTS—STEEL—UNSLOTTED NUTS		
375X/550	20380	.9
NUTS—STAINLESS—SLOTTED NUTS		
375X/550	20381	.7
NUTS—EVERDUR—SLOTTED NUTS		
375X/550	20387	.8

Exclusive Piloted Bolt Design Simplifies Installation:






The new piloted bolt is currently being phased in to replace standard bolt designs. To order the new piloted bolts as they become available, use standard bolt ordering numbers.



Flexco® Bolt Hinged Fasteners

INSTALLATION TOOLS

HAND & POWER TOOLS


HAND TOOLS	DESCRIPTION	FOR FASTENER NUMBER	ORDERING NUMBER	ITEM CODE	WT. LBS.
	BOLT BREAKER (Two Per Package) 	375X & 550	110	30474	1.2
	PUNCH 	375X & 550	P1P	30460	.1
	BORING BIT 	375X & 550	B1B	30468	.1
	WRENCH 	375X & 550	100* S1S**	30445 30442	.2 .2
POWER TOOLS	POWER PUNCH 	375X & 550	HP1	30463	.2
	POWER BORING BIT 	375X & 550	HB1	30471	.1
	POWER WRENCH 	375X & 550	H100* HW1**	30446 30447	.2 .3
	QUICK CHANGE CHUCK 	375X & 550	5552	30481	.4

* For use with Steel No. 375X or Steel No. 550 nuts.

** For use with Stainless No. 375X or Stainless No. 550 slotted nuts only.


MISCELLANEOUS

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.	INSIDE DIAMETER
Orange Filler Tubing for 375X & 550	(100'/pkg.)	30894	10.0	—
Hinge Pin Retaining Washers (50/Pkg.) — For use with 375X and 550 Nylon Coated hinge pins	310-RET-50	40135	.3	1/4"




ALIGNING HOLDERS

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
375X				
30"	750	AH37530	30836	9.6
36"	900	AH37536	30837	11.4
42"	1050	AH37542	30838	12.9
48"	1200	AH37548	30839	14.5
550				
30"	750	AH530	30840	9.7
36"	900	AH536	30841	11.6
42"	1050	AH542	30842	12.8
48"	1200	AH548	30843	14.4



FLEXCO-LOK® BELT TAPE 100' PER CARTON FOR USE WITH INDIVIDUAL PLATES

FOR FASTENER NUMBER	ORDERING NUMBER	ITEM CODE	WT. LBS.
375X/550	FL7C	30888	.8

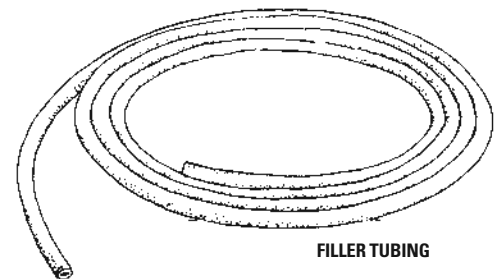

FILLER TUBING



RETAINING WASHERS

 **Stock Items** (non-shaded) carried in factory inventory.

 **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.



How Flexco® Rivet Hinged Fasteners Work

Designed for synthetic carcass belting as well as other styles of belt, Flexco® SR™ (Self-Setting Rivet) Fasteners utilize multiple rivet attachment. This provides maximum resistance to pull-out and allows the patented rivets to work between the carcass fibers without severing them, leaving the entire belt carcass intact. It does not rely solely upon the carcass material to resist pull-out.

Because the rivets are self-setting, fasteners are installed quickly from the top side of the belt.

Rivets are driven through the fastener plates and through the belt, passing between the carcass fibers. The specially-shaped head of each pilot nail works in conjunction with the applicator tool's anvil plate to set the rivets.

The same hammer blows that set the rivets also compress the fastener plates into the belt cover. The broad width and heavy gauge of the plates give extended wear life. These plates compress uniformly and are specially coined so there are no high spots or edges to hang up.

Applications	Installation Method	What You Need for Installation
- Underground Mining - Asphalt Plants - Aggregate and Ready-mix Plants - Log Belts and Similar Applications	Fastener installed with portable fixture and hammer. Fasteners are installed in one simple procedure with self-setting rivets.	- Fastener - Rivets - Hinge Pin - Flexco Installation Tool - Hammer
How to Specify the Correct Flexco® Rivet Hinged Fastener	Fastener Metal Selection	Hinge Pin Selection
- Determine Belt Tension (PIW). - Measure your Belt Thickness. - Measure the Diameter of the Smallest Pulley in your Drive with Belt Wrap more than 90°. - Choose the fastener size that is appropriate for your specifications in the selection chart below.	Steel. For most applications, plated steel is recommended. Stainless Steel. Type 316 Stainless Steel provides extra resistance to abrasion, magnetic attraction and corrosion from acids and chemicals. RustAlloy®. Resists corrosion due to mine water or other chemical attack. MegAlloy®. For superior resistance to wear and abrasion.	AC Bare Armored Cable - for extendable conveyors. ACS Bare Armored Stainless Cable - for extendable conveyors. NAC Nylon Covered Armored Cable - right for many applications, long service life. NC Nylon Covered Steel Cable - for use with steel fasteners, flat or troughed belts. NCS Nylon Covered Stainless Steel Cable - for applications with stainless fasteners, flat or troughed belts. SC Bare Steel Cable - for conveying gritty or abrasive material. SSC Bare Stainless Steel Cable - for corrosion resistance, flat belts.

Flexco® Rivet Hinged Fastener Selection Chart

Fastener Size	For Belts With Mechanical Fastener Ratings Up To:		Belt Thickness Range		Recommended Min. Pulley Diameter			
					Operating Tension Under 100% of Belt Rating		Operating Tension Under 75% of Belt Rating	
	P.I.W.	kN/m	in.	mm	in.	mm	in.	mm
R5	450	79	7/32-7/16	6-11	9	230	7	175
R5-1/2	650	114	5/16-19/32	8-15	12	300	10	250
R6	800	140	13/32-11/16	10.5-17	18	450	16	400
R6LP	800	140	5/16-23/32	8-18	18	450	16	400
R8	1500	263	13/32-11/16	10.5-17	18	450	16	400
R9	2000	350	5/8-1	16-25.5	42	1050	42	1050



Flexco® R2 Medium-Duty Rivet Hinged Belt Fasteners

FASTENERS

Order each component separately for a complete splice:
Fastener Strip + Rivets + Hinge Pin

For R2	STEEL (Continuous Strip)				
	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	PACKAGE (Two Fastener Strips)		
	12"	300	R2-12/300	41613	2.0
	18"	450	R2-18/450	41614	2.6
	24"	600	R2-24/600	41615	3.4
	30"	750	R2-30/750	41616	4.2
	36"	900	R2-36/900	41617	5.1
	42"	1050	R2-42/1050	41618	5.9
	48"	1200	R2-48/1200	41619	6.9
	54"	1350	R2-54/1350	41623	8.1
	60"	1500	R2-60/1500	41624	9.2
STAINLESS 300 SERIES					
For R2	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	PACKAGE (Two Fastener Strips)		
	12"	300	R2S-12/300	41628	2.0
	18"	450	R2S-18/450	41629	2.6
	24"	600	R2S-24/600	41630	3.4
	30"	750	R2S-30/750	41631	4.2
	36"	900	R2S-36/900	41632	5.1
	42"	1050	R2S-42/1050	41633	5.9
	48"	1200	R2S-48/1200	41634	6.9
	54"	1350	R2S-54/1350	41642	8.1
	60"	1500	R2S-60/1500	41643	9.2

MEGALLOY® (4 Plate Strips, 10 Strip Per Box)

For R2	ORDERING NUMBER		ITEM CODE	WT. LBS.		
	R2MA-SE		41709	4.7		
	Plates Required for one R2MA Joint					
	BELT WIDTH		PLATES REQUIRED	BELT WIDTH		PLATES REQUIRED
	in.	mm		in.	mm	
	18"	450	20	42"	1050	46
	24"	600	26	48"	1200	54
	30"	750	32	54"	1350	60
	36"	900	40	60"	1500	68

R2T APPLICATOR TOOL

Use with SR-50 single Rivet Driver

TOOL SIZE		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
12"	300			
		R2T	40455	6.6
REPLACEMENT PARTS				
Gauge Pin Guide		SR26	40479	.04
Anvil Insert (14/Bag)		R2T-AI	40469	.06

SINGLE RIVET DRIVER TOOL

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Driver Tool Complete	SR-50	40510	.8
Drive Rod	SR5-7	40517	.3

RIVET SET*

ORDERING NUMBER	ITEM CODE	WT. LBS.
R5S	40348	1.9

*If no SRTA Application Tool is available, fasteners may be installed with an R5S Flexco Rivet Set. See Instruction Sheet No. FR906

RIVETS

Self-setting, pre-assembled with pilot nails



STEEL

ORDERING NUMBER	ITEM CODE	BOX QTY.	WT. LBS.
BOX (100 Rivets)			
SRAA-100	40509	100	.8
SRA-100	40539	100	.9
SRB-100	40540	100	1.0
BOX (250 Rivets)			
SRAA	40508	250	2.2
SRA	40527	250	2.3
SRB	40528	250	2.5
BUCKET (2000 Rivets)			
SRAA-2M	40424	2000	16.1
SRA-2M	41190	2000	18.3
SRB-2M	41191	2000	19.7

STAINLESS (TYPE 430)

ORDERING NUMBER	ITEM CODE	BOX QTY.	WT. LBS.
BOX (250 Rivets)			
SRAA-S	40468	250	2.1
SRA-S	40542	250	2.3
SRB-S	40543	250	2.5




RIVET BUCKET
(Contains 2000 Rivets)

FLEXCO® R2 RIVET SPECIFICATION CHART

FASTENER SIZE	FOR BELTS WITH MECHANICAL FASTENER RATINGS UP TO:		BELT THICKNESS RANGE		RIVET SIZE	MINIMUM PULLEY DIAMETER	
	P.I.W.	kN/m	in.	mm		in.	mm
R2	330	60	1/8-7/32"	3-6	SRAA	5"	127
			3/16-5/16"	4-8	SRA		
			9/32-3/8"	7-10	SRB		

Rivets Required For One R2 Joint

BELT WIDTH		RIVET REQUIRED
in.	mm	
12	300	24
18	450	40
24	600	52
30	750	64
36	900	80
42	1050	92
48	1200	108
54	1350	120
60	1500	136



NOTE: For hinge pins and retaining washers for R2 see pages 57.

NOTE: For Multiple Rivet (MSRT) and Single Rivet (SRTA) Applicator Tools see pages 60 & 61.

Flexco® SR™ Scalloped Edge™ Rivet Hinged Fasteners



FASTENERS

Order each component separately for a complete splice: Fastener Strip + Rivets + Hinge Pin

STEEL (Continuous Strip)

For R5	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	PACKAGE (Two Fastener Strips)		
	18"	450	R5-SE-18/450	41314	2.6
	24"	600	R5-SE-24/600	41315	3.4
	26"	650	R5-SE-26/650	41409	3.7
	30"	750	R5-SE-30/750	41276	4.2
	36"	900	R5-SE-36/900	41277	5.1
	42"	1050	R5-SE-42/1050	41278	5.9
	48"	1200	R5-SE-48/1200	41279	6.9
	54"	1350	R5-SE-54/1350	41296	7.3
	60"	1500	R5-SE-60/1500	41298	8.5
	72"	1800	R5-SE-72/1800	41316	10.4

STAINLESS TYPE 316 (Continuous Strip)


	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	PACKAGE (Two Fastener Strips)		
	18"	450	R5S-SE-18/450	41326	2.6
	24"	600	R5S-SE-24/600	41327	3.4
	30"	750	R5S-SE-30/750	41289	4.2
	36"	900	R5S-SE-36/900	41290	5.1
	42"	1050	R5S-SE-42/1050	41291	5.9
	48"	1200	R5S-SE-48/1200	41292	6.9
	60"	1500	R5S-SE-60/1500	41294	8.5

RUSTALLOY® (Continuous Strip)*

	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	PACKAGE (Two Fastener Strips)		
	24"	600	RAR5-SE-24/600	41328	3.4
	26"	650	RAR5-SE-26/650	41329	3.6
	30"	750	RAR5-SE-30/750	41283	4.2
	36"	900	RAR5-SE-36/900	41284	5.1
	42"	1050	RAR5-SE-42/1050	41285	5.9
	48"	1200	RAR5-SE-48/1200	41286	6.9
	54"	1350	RAR5-SE-54/1350	41287	7.3
	60"	1500	RAR5-SE-60/1500	41288	8.5

MEGALLOY® (4 Plate Strips. 10 Strip Per Box)

For R5	ORDERING NUMBER		ITEM CODE	WT. LBS.
	R5MA-SE		41067	4.7
	Plates Required for one R5MA Joint			
	BELT WIDTH		PLATES REQUIRED	PLATES REQUIRED
	in.	mm		
	18"	450	20	54
	24"	600	26	60
	30"	750	32	68
	36"	900	40	82
	42"	1050	46	

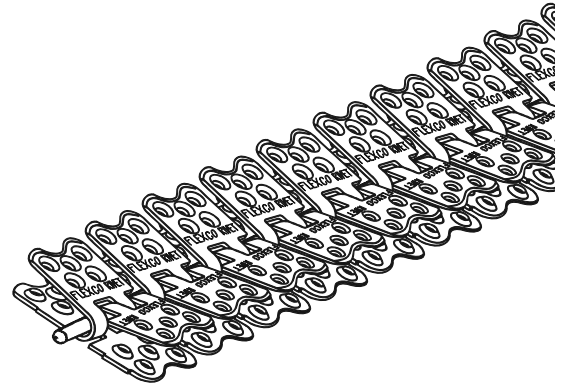

STEEL (Continuous Strip)

For R5-1/2	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	PACKAGE (Two Fastener Strips)		
	18"	450	R5-1/2-SE-18/450	41514	3.9
	24"	600	R5-1/2-SE-24/600	41515	5.0
	30"	750	R5-1/2-SE-30/750	41516	6.3
	36"	900	R5-1/2-SE-36/900	41513	7.8
	42"	1050	R5-1/2-SE-42/1050	41509	8.8
	48"	1200	R5-1/2-SE-48/1200	41510	9.9
	54"	1350	R5-1/2-SE-54/1350	41525	11.6
	60"	1500	R5-1/2-SE-60/1500	41511	12.5
	72"	1800	R5-1/2-SE-72/1800	41512	15.5

RUSTALLOY® (Continuous Strip)*

	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	PACKAGE (Two Fastener Strips)		
	24"	600	RAR5-1/2-SE-24/600	41341	5.0
	30"	750	RAR5-1/2-SE-30/750	41342	6.3
	36"	900	RAR5-1/2-SE-36/900	41351	7.5
	42"	1050	RAR5-1/2-SE-42/1050	41391	8.9
	46"	1150	RAR5-1/2-SE-46/1150	41392	9.7
	48"	1200	RAR5-1/2-SE-48/1200	41319	10.1
	54"	1350	RAR5-1/2-SE-54/1350	41393	11.5
	60"	1500	RAR5-1/2-SE-60/1500	41394	12.5
	72"	1800	RAR5-1/2-SE-72/1800	41395	15.4

* 400 SERIES STAINLESS

MEGALLOY® (4 Plate Strips. 10 Strip Per Box)

For R5-1/2	ORDERING NUMBER		ITEM CODE	WT. LBS.
	R5-1/2MA-SE		41450	4.7
	Plates Required for one R5-1/2MA Joint			
	BELT WIDTH		PLATES REQUIRED	PLATES REQUIRED
	in.	mm		
	18"	450	20	54
	24"	600	26	60
	30"	750	32	68
	36"	900	40	82
	42"	1050	46	

☐ Stock Items (non-shaded) carried in factory inventory.

☒ Made To Order Items (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.



Flexco® SR™ Scalloped Edge™ Rivet Hinged Fasteners

FASTENERS

Order each component separately for a complete splice: Fastener Strip + Rivets + Hinge Pin

STEEL (Continuous Strip)

For R6	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	PACKAGE (Two Fastener Strips)		
	24"	600	R6-SE-24/600	40408	6.6
	30"	750	R6-SE-30/750	40409	8.4
	36"	900	R6-SE-36/900	40399	10.3
	42"	1050	R6-SE-42/1050	40389	11.7
	46"	1150	R6-SE-46/1150	40415	13.2
	48"	1200	R6-SE-48/1200	40390	13.8
	54"	1350	R6-SE-54/1350	40391	14.6
	60"	1500	R6-SE-60/1500	40392	16.2
72"	1800	R6-SE-72/1800	40393	20.8	
84"	2130	R6-SE-84/2130	40416	28.7	

RUSTALLOY® (Continuous Strip) *

	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	PACKAGE (Two Fastener Strips)		
	24"	600			
	30"	750			
	36"	900			
	42"	1050	RAR6-SE-42/1050	41542	11.7
	46"	1150	RAR6-SE-46/1150	41548	13.2
	48"	1200	RAR6-SE-48/1200	41543	13.8
	54"	1350	RAR6-SE-54/1350	41544	14.6
	60"	1500	RAR6-SE-60/1500	41545	16.2
72"	1800	RAR6-SE-72/1800	41546	20.8	
84"	2130	RAR6-SE-84/2130	41547	28.7	

RAR6LP LOW PROFILE*

	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	PACKAGE (Two Fastener Strips)		
	24"	600			
	30"	750			
	36"	900			
	42"	1050	RAR6LP-SE-42/1050	40828	8.4
	46"	1150	RAR6LP-SE-46/1150	40834	9.0
	48"	1200	RAR6LP-SE-48/1200	40829	9.6
	54"	1350	RAR6LP-SE-54/1350	40830	10.1
	60"	1500	RAR6LP-SE-60/1500	40831	10.7
72"	1800	RAR6LP-SE-72/1800	40832	12.5	
84"	2130	RAR6LP-SE-84/2130	40833	16.4	


RUSTALLOY® (Continuous Strip) *

For R8	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	PACKAGE (Two Fastener Strips)		
	48"	1200	RAR8-SE-48/1200	41712	13.8
	54"	1350	RAR8-SE-54/1350	41713	14.6
	60"	1500	RAR8-SE-60/1500	41714	16.2
	72"	1800	RAR8-SE-72/1800	41715	20.8
	84"	2130	RAR8-SE-84/2130	41716	28.7

* 400 SERIES STAINLESS

STAINLESS 300 SERIES

For R9	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	PACKAGE (Two Fastener Strips)		
	48"	1200	R9S-SE-48/1200	41737	17.0
	54"	1350	R9S-SE-54/1350	41738	19.0
	60"	1500	R9S-SE-60/1500	41739	21.8
	72"	1800	R9S-SE-72/1800	41740	25.8
	84"	2130	R9S-SE-84/2130	41741	30.2

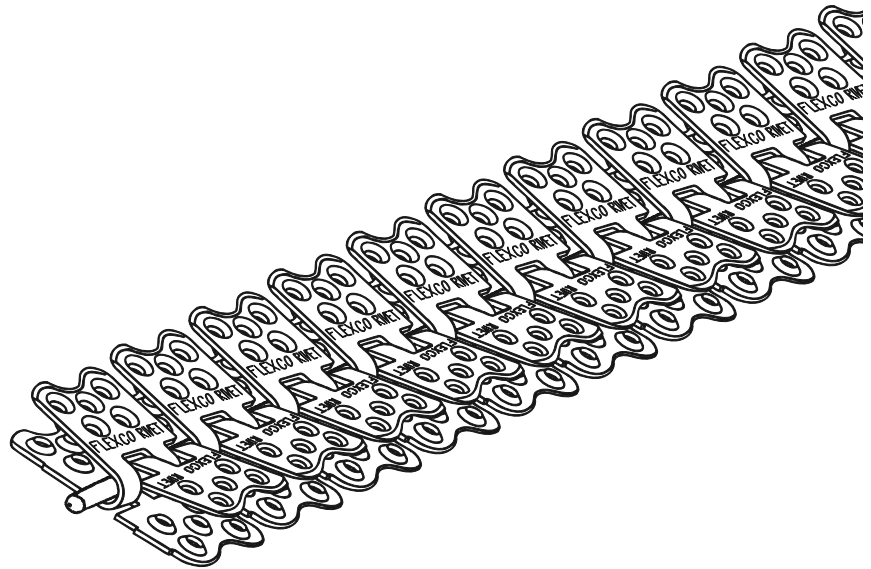

 **Stock Items** (non-shaded) carried in factory inventory.

 **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.

Flexco® SR™ Scalloped Edge™ Rivet Hinged Fasteners



RIVETS

Self-setting, pre-assembled with pilot nails



STEEL

ORDERING NUMBER	ITEM CODE	BOX QTY.	WT. LBS.
BOX (100 Rivets)			
SRA-100	40539	100	.9
SRB-100	40540	100	1.0
SRC-100	40541	100	1.1
BOX (250 Rivets)			
SRA	40527	250	2.3
SRB	40528	250	2.5
SRC	40529	250	2.6
SRC/D	40538	250	2.8
SRD	40530	250	2.9
SRE	40531	250	3.1
SRF	40532	250	3.1
SRG	40533	250	3.2
SRH	40534	250	3.4
SRI	40535	250	3.5
SRJ	40536	250	3.6
SRK	40537	250	3.7
BUCKET (2000 Rivets)			
SRA-2M	41190	2000	16.6
SRB-2M	41191	2000	18.1
SRC-2M	41192	2000	20.2
SRC/D-2M	41193	2000	21.2
SRD-2M	41194	2000	21.9
SRE-2M	41195	2000	23.1
SRF-2M	41196	2000	24.4
SRG-2M	41197	2000	24.9
SRH-2M	41198	2000	25.1
SRI-2M	41199	2000	25.9

STAINLESS (TYPE 430)

ORDERING NUMBER	ITEM CODE	BOX QTY.	WT. LBS.
BOX (250 Rivets)			
SRA-S	40542	250	2.3
SRB-S	40543	250	2.5
SRC-S	40544	250	2.6
SRC/D-S	40548	250	2.8
SRD-S	40545	250	2.9
SRE-S	40546	250	3.1
SRF-S	40547	250	3.1
SRG-S	40523	250	3.2
SRH-S	40522	250	3.4
SRI-S	40506	250	16.7
SRJ-S	40507	250	18.4
SRK-S	40520	250	19.9
BUCKET (2000 Rivets)			
SRA-S-2M	41200	2000	17.1
SRB-S-2M	41201	2000	18.9
SRC-S-2M	41202	2000	20.6
SRC/D-S-2M	41203	2000	21.3
SRD-S-2M	41204	2000	21.9
SRE-S-2M	41205	2000	22.9
SRF-S-2M	41206	2000	23.5
SRG-S-2M	41207	2000	24.7
SRH-S-2M	41208	2000	25.1
SRI-S-2M	41181	2000	26.3
SRJ-S-2M	41183	2000	27.5
SRK-S-2M	41185	2000	28.7

Rivets Required For One R5, R5-1/2 or R6 Joint

BELT WIDTH		RIVETS REQUIRED
in.	mm	
18"	450	100
24"	600	130
30"	750	160
36"	900	200
42"	1050	230
48"	1200	270
54"	1350	300
60"	1500	340
72"	1800	410
84"	2130	480

Rivets Required For One R8 or R9 Joint

BELT WIDTH		RIVETS REQUIRED
in.	mm	
48"	1200	432
54"	1350	480
60"	1500	544
72"	1800	656
84"	2130	768

RIVET SELECTION CHART

FASTENER SIZE	BELT THICKNESS RANGE		RIVET SIZE
	in.	mm	
R5	7/32-5/16	6-8	SRA
	9/32-3/8	7-10	SRB
	11/32-7/16	9-11	SRC
	13/32-7/16	10.5-11	SRC/D
R5-1/2 & R6LP	5/16-11/32	8-9	SRB
	5/16-13/32	8-10.5	SRC
	3/8-15/32	10-12	SRC/D
	7/16-17/32	11-13.5	SRD
	1/2-19/32	13-15	SRE
	9/16-21/32	14-16.5	SRF*
	5/8-23/32	16-18	SRG*
R6	13/32-7/16	9-11	SRC/D
	13/32-1/2	10.5-13	SRD
	15/32-9/16	12-14	SRE
	17/32-5/8	13.5-16	SRF
	19/32-11/16	15-17	SRG
R8	13/32-7/16	10.5-11	SRC/D
	13/32-1/2	10.5-13	SRD
	15/32-9/16	12-14	SRE
	17/32-5/8	13.5-16	SRF
	19/32-11/16	15-17	SRG
R9	19/32-11/16	16-17	SRG
	21/32-3/4	16.5-19	SRH
	23/32-13/16	18-21	SRI
	25/32-7/8	20-22	SRJ**
	27/32-15/16	21-24	SRK**

* Applies to RAR6LP only.

** Use with 3/4" diameter hinge pin.



Flexco® SR™ Scalloped Edge™ Rivet Hinged Fasteners

RAPID LOADER™ RIVET STRIPS

(For R5, R5-1/2, R6, BR10)

Self-setting, pre-assembled with pilot nails

60 Strips / 1200 Rivets per Bucket

DESCRIPTION		ORDERING NUMBER	ITEM CODE	WT. LBS.
Size	Color Code			
STEEL				
A	Red	CSRLA	40857	13.00
B	White	CSRLB	40858	13.92
C	Blue	CSRLC	40859	14.84
C/D	Orange	CSRLC/D	40860	15.56
D	Green	CSRLD	40861	16.06
E	Purple	CSRLE	40862	16.62
F	Yellow	CSRLF	40863	17.34
G	Black	CSRLG	40864	17.90
STAINLESS (TYPE 430)				
A	Red	CSRLA-S	40978	12.90
B	White	CSRLB-S	40979	13.80
C	Blue	CSRLC-S	40980	14.92
C/D	Orange	CSRLC/D-S	40981	15.31
D	Green	CSRLD-S	40982	15.92
E	Purple	CSRLE-S	40983	16.48
F	Yellow	CSRLF-S	40984	16.94
G	Black	CSRLG-S	40985	17.52

(For R8 and R9)

		STEEL				
Rivet Qty.	1024	C/D	Orange	CSRL8C/D	41845	13.50
		D	Green	CSRL8D	41846	14.10
		E	Purple	CSRL8E	41847	14.70
		F	Yellow	CSRL8F	41848	15.30
		G	Black	CSRL8G	41849	16.00
	768	H	Gray	CSRL8H	41850	12.50
		I	Lt. Blue	CSRL8I	41851	13.10
		J	Brown	CSRL8J	41852	13.70
		K	Beige	CSRL8K	41853	14.30
STAINLESS (TYPE 430)						
Rivet Qty.	1024	C/D	C/D	CSRL8C-D-S	41854	13.50
		D	D	CSRL8D-S	41855	14.10
		E	E	CSRL8E-S	41856	14.70
		F	F	CSRL8F-S	41857	15.30
		G	G	CSRL8G-S	41858	16.00
	768	H	H	CSRL8H-S	41859	12.50
		I	I	CSRL8I-S	41860	13.10
		J	J	CSRL8J-S	41861	13.70
		K	K	CSRL8K-S	41862	14.30



NOTE: Use standard rivet selection criteria for collated rivet strips.

RAPID LOADER™ RIVET STRIPS

WITH WASHERS

(For R5, R5-1/2, R6, BR10)

(For use with the Flexco® Power Set™ Rivet Driver and Hilti DX 460-SR installation tool)

60 Strips / 1200 Rivets per Bucket

DESCRIPTION		ORDERING NUMBER	ITEM CODE	WT. LBS.
Size	Color Code			
STEEL				
A	Red	CSRLA-W	40891	13.00
B	White	CSRLB-W	40892	13.92
C	Blue	CSRLC-W	40893	14.84
C/D	Orange	CSRLC/D-W	40895	15.56
D	Green	CSRLD-W	40897	16.06
E	Purple	CSRLE-W	40898	16.62
F	Yellow	CSRLF-W	40899	17.34
G	Black	CSRLG-W	40901	17.90
STAINLESS (TYPE 430)				
A	Red	CSRLA-S-W	40955	12.90
B	White	CSRLB-S-W	40956	13.80
C	Blue	CSRLC-S-W	40957	14.92
C/D	Orange	CSRLC/D-S-W	40958	15.31
D	Green	CSRLD-S-W	40959	15.92
E	Purple	CSRLE-S-W	40961	16.48
F	Yellow	CSRLF-S-W	40969	16.94
G	Black	CSRLG-S-W	40971	17.52

(For R8 and R9)

		STEEL				
Rivet Qty.	1024	C/D	Orange	CSRL8C/D-W	41879	13.50
		D	Green	CSRL8D-W	41880	14.10
		E	Purple	CSRL8E-W	41881	14.70
		F	Yellow	CSRL8F-W	41882	15.30
		G	Black	CSRL8G-W	41883	16.00
	768	H	Gray	CSRL8H-W	41884	12.50
		I	Lt. Blue	CSRL8I-W	41885	13.10
		J	Brown	CSRL8J-W	41886	13.70
		K	Beige	CSRL8K-W	41887	14.30
		STAINLESS (TYPE 430)				
Rivet Qty.	1024	C/D	Orange	CSRL8C/D-S-W	41888	13.50
		D	Green	CSRL8D-S-W	41889	14.10
		E	Purple	CSRL8E-S-W	41890	14.70
		F	Yellow	CSRL8F-S-W	41891	15.30
		G	Black	CSRL8G-S-W	41892	16.00
	768	H	Gray	CSRL8H-S-W	41893	12.50
		I	Lt. Blue	CSRL8I-S-W	41894	13.10
		J	Brown	CSRL8J-S-W	41895	13.70
		K	Beige	CSRL8K-S-W	41896	14.30




(SEE PAGE 58 & 59 FOR ADDITIONAL HINGE PINS.)

FOR R2 & R5

*300 SERIES

50 PER PACKAGE

NOTE: 1/4" inside diameter



Non-Listed Items are available.
Request quote for price and delivery.



Flexco® SR™ Scalloped Edge™ Rivet Hinged Fasteners

HINGE PINS



FOR R5

ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
SC932 BARE STEEL CABLE (9/32" dia.)			*SSC932 BARE STAINLESS CABLE (9/32" dia.)		
EACH (One Pin)			EACH (One Pin)		
SC932-18-1	38348	.4	SSC932-18-1	38349	.4
SC932-24-1	38344	.5	SSC932-24-1	38336	.5
SC932-30-1	38341	.6	SSC932-30-1	38337	.6
SC932-36-1	38342	.7	SSC932-36-1	38338	.7
SC932-38-1	38413	.7	SSC932-38-1	38425	.7
SC932-40-1	38406	.8	SSC932-40-1	38426	.8
SC932-42-1	38343	.8	SSC932-42-1	38339	.8
SC932-44-1	38405	.9	SSC932-44-1	38427	.9
SC932-46-1	38404	.9	SSC932-46-1	38428	.9
SC932-48-1	38345	.9	SSC932-48-1	38340	.9
SC932-54-1	38355	1.0	SSC932-54-1	38429	1.0
SC932-60-1	38351	1.0	SSC932-60-1	38352	1.0
SC932-72-1	38350	1.1	SSC932-72-1	38335	1.1
PACKAGE (Ten Pins)			PACKAGE (Ten Pins)		
SC932-30	38300	5.8	SSC932-30	38320	5.8
SC932-36	38301	7.0	SSC932-36	38321	7.0
SC932-38	38412	7.4	SSC932-38	38420	7.4
SC932-40	38409	7.8	SSC932-40	38417	7.8
SC932-42	38302	8.2	SSC932-42	38322	8.2
SC932-44	38411	8.6	SSC932-44	38419	8.6
SC932-46	38410	8.9	SSC932-46	38418	8.9
SC932-48	38303	9.3	SSC932-48	38323	9.3
SC932-54	38305	9.9	SSC932-54	38325	9.9
SC932-60	38312	10.5	SSC932-60	38317	10.5

*300 SERIES

NOTE:


For hinge pin retaining washers for R5 pins, see page 57.

FOR R5-1/2, R6, RAR6LP

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
		AC6 BARE ARMORED STEEL CABLE (3/8" dia.)			SC6 BARE STEEL CABLE (23/64" dia.)		
in.	mm	EACH (One Pin)			EACH (One Pin)		
24"	600	AC6-24-1	38164	.7			
30"	750	AC6-30-1	38165	.8			
36"	900	AC6-36-1	38166	1.0			
38"	950	AC6-38-1	38161	1.1	SC6-38-1	38370	1.1
40"	1000	AC6-40-1	38162	1.1	SC6-40-1	38371	1.2
42"	1050	AC6-42-1	38167	1.2	SC6-42-1	38376	1.2
44"	1100	AC6-44-1	38143	1.3	SC6-44-1	38372	1.3
46"	1150				SC6-46-1	38373	1.4
48"	1200	AC6-48-1	38168	1.4	SC6-48-1	38377	1.4
52"							
54"	1350	AC6-54-1	38169	1.5	SC6-54-1	38374	1.5
60"	1500	AC6-60-1	38170	1.7	SC6-60-1	38375	1.6
72"	1800	AC6-72-1	38171	2.1	SC6-72-1	38378	2.1
84"	2130				SC6-84-1	38387	2.5
PACKAGE (Ten Pins)					PACKAGE (Ten Pins)		
24"	600	AC6-24	40707	6.2			
30"	750	AC6-30	40709	8.1	SC6-36	38362	10.5
36"	900	AC6-36	40710	10.0	SC6-38	38365	11.0
38"	950	AC6-38	38403	10.2	SC6-40	38366	11.6
40"	1000	AC6-40	38401	11.0	SC6-42	38363	12.2
42"	1050	AC6-42	40712	12.0	SC6-44	38367	12.8
44"	1100	AC6-44	40713	12.3	SC6-46	38368	13.4
46"	1150				SC6-48	38364	14.0
48"	1200	AC6-48	40714	12.5			
52"	1350				SC6-54	38369	15.8
54"	1350	AC6-54	40716	14.7	SC6-60	38380	17.6
60"	1500	AC6-60	40718	16.2	SC6-72	38381	20.9
72"	1800	AC6-72	40720	19.6	SC6-84	38390	25.0
84"	2130	AC6-84	40721	25.0			

HINGE PIN RETAINING COLLARS

FOR PIN DIAMETER	ORDERING NUMBER	ITEM CODE	WT. LBS.
7/32-9/32	HPRET1	40198	.5
2-3/64-13/32	HPRET2	40199	.5

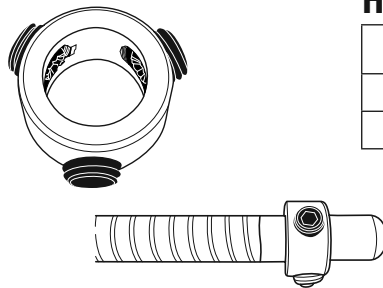

 **Stock Items** (non-shaded) carried in factory inventory.

 **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.

Flexco® SR™ Scalloped Edge™ Rivet Hinged Fasteners



HINGE PINS



FOR R5-1/2, R6,
RAR6LP & RAR8

FOR R6, RAR6LP

FOR R9

ORDERING NUMBER	ITEM CODE	WT. LBS.
*ACS6 BARE ARMORED STAINLESS CABLE (3/8"dia.)		
EACH (One Pin)		
ACS6-36/900-1	39274	1.0
ACS6-40-1	39280	1.1
ACS6-42-1	39275	1.2
ACS6-46-1	39281	1.3
ACS6-48-1	39276	1.3
ACS6-52-1	39282	1.4
ACS6-54-1	39277	1.5
ACS6-60-1	39278	1.7
ACS6-72-1	39279	2.1
ACS6-84-1	39283	2.5
PACKAGE (Ten Pins)		
ACS6-36/900	39300	10.0
ACS6-40	39307	11.0
ACS6-42	39301	12.0
ACS6-46	39308	12.3
ACS6-48	39302	3.4
ACS6-52	39306	14.0
ACS6-54	39303	15.8
ACS6-60	39304	17.6
ACS6-72	39305	20.9
ACS6-84	39309	25.0

ORDERING NUMBER	ITEM CODE	WT. LBS.
NAC6 NYLON COVERED ARMORED CABLE (13/32"dia.)		
EACH (One Pin)		
NAC6-24-1	38144	.7
NAC6-30-1	38145	.8
NAC6-36-1	38146	1.0
NAC6-38-1	40940	1.1
NAC6-40-1	40941	1.1
NAC6-42-1	38147	1.2
NAC6-44-1	40942	1.3
NAC6-46-1	40943	1.4
NAC6-48-1	38148	1.4
NAC6-54-1	38149	1.5
NAC6-60-1	38150	1.7
NAC6-72-1	38151	2.1
NAC6-84-1	38154	2.4
PACKAGE (Ten Pins)		
NAC6-24	40654	6.5
NAC6-30	40657	8.3
NAC6-36	40659	10.0
NAC6-38	40681	10.2
NAC6-40	40670	11.0
NAC6-42	40661	11.8
NAC6-44	40680	12.3
NAC6-46	40679	12.9
NAC6-48	40663	13.5
NAC6-54	40665	15.0
NAC6-60	40667	17.0
NAC6-72	40669	20.1
NAC6-84	40671	24.4

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
*NCS NYLON COVERED STAINLESS CABLE (5/8"dia.)			
EACH (One Pin)			
in.	mm		
48"	1200	NCS962-48-1	53234 2.2
54"	1350	NCS962-54-1	53235 2.4
60"	1500	NCS962-60-1	53236 2.7
72"	1800	NCS962-72-1	53237 3.3
84"	2130	NCS962-84-1	53238 3.8

ORDERING NUMBER	ITEM CODE	WT. LBS.
NCS NYLON COVERED STAINLESS CABLE (3/4"dia.)		
EACH (One Pin)		
NCS975-48-1	53255	3.1
NCS975-54-1	53256	3.5
NCS975-60-1	53257	4.0
NCS975-72-1	53258	4.8
NCS975-84-1	53259	5.6

***300 SERIES**

 **Stock Items** (non-shaded) carried in factory inventory.

 **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.



Flexco® SR™ Scalloped Edge™ Rivet Hinged Fasteners

INSTALLATION TOOLS

Multiple Rivet Applicator Tool

MSRT APPLICATOR COMPLETE

(Includes two SR700 Multiple Guide Blocks, two SR759 Multiple Drive Rods, two 4 lb. Hammers, Lubricant and one Canvas Carry Bag.)

(NOTE: For installation of R5, R5-1/2, and R6 Fasteners.)

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
30"	750	MSRT-30	41041	63.0
36"	900	MSRT-36	41042	70.0
42"	1050	MSRT-42	41043	77.0
48"	1200	MSRT-48	41044	85.0
60"	1500	MSRT-60	41046	93.0
72"	1800	MSRT-72	41047	100.0
84"	2130	MSRT-84	41048	110.0

MSRT8 APPLICATOR COMPLETE

(NOTE: Installs R6, RAR6 & RAR8 fasteners only.)

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
48"	1200	MSRT8-48	41032	85.0
60"	1500	MSRT8-60	41033	93.0
72"	1800	MSRT8-72	41034	100.0
84"	2130	MSRT8-84	41035	110.0

MSRT9 APPLICATOR COMPLETE


(NOTE: Installs R9 fasteners only.)

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
48"	1200	MSRT9-48	40994	82.0
60"	1500	MSRT9-60	40995	98.0
72"	1800	MSRT9-72	40996	114.0
84"	2130	MSRT9-84	40997	121.0

NOTE: Guide blocks cannot be used with rivet sizes J, K and L.

MULTIPLE RIVET DRIVER COMPONENTS

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Multiple Guide Block	SR700	41054	3.0
Multiple 5 Prong Drive Rod	SR759	41055	1.0
Multiple Guide Block - For R8	SR800	41050	5.1
8 Prong Drive Rod	SR859-8	41068	1.2
Multiple Guide Block - For R9	SR900	41045	7.0
2 Prong Drive Rod	SR759-2	41058	.9
Silicone Lubricant	SL5-1	30932	1.4
Four lb. Hammer	4FH	30435	5.3
Six lb. Hammer	6FH	30375	7.3
Canvas Bag	SR-CB	41031	1.3

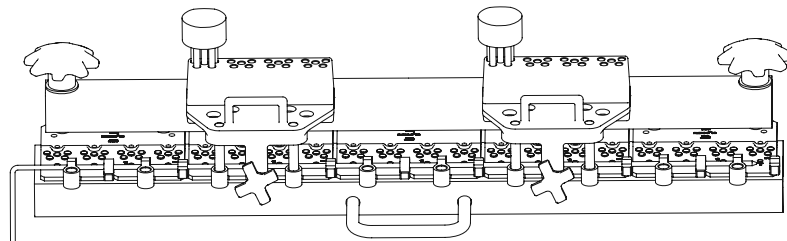

ALUMINUM MSRT APPLICATOR COMPLETE

(Includes two SR700 Multiple Guide Blocks, two SR759 Multiple Drive Rods, two 4 lb. Hammers, Lubricant and one Canvas Carry Bag.)


BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
30"	750	MSRT-30-AL	40771	*57.0
36"	900	MSRT-36-AL	40773	63.0
42"	1050	MSRT-42-AL	40775	69.0
48"	1200	MSRT-48-AL	40776	76.0
60"	1500	MSRT-60-AL	40782	89.0
72"	1800	MSRT-72-AL	40783	105.0
84"	2130	MSRT-84-AL	40784	*121.0
96"	2430	MSRT-96-AL	40785	*137.0

ALUMINUM MSRT8 APPLICATOR COMPLETE

(NOTE: Installs R6, RAR6 & RAR8 fasteners only.)

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
48"	1200	MSRT8-48-AL	41115	76.0
60"	1500	MSRT8-60-AL	41116	89.0
72"	1800	MSRT8-72-AL	41117	105.0
84"	2130	MSRT8-84-AL	41118	*121.0
96"	2430	MSRT8-96-AL	41119	*137.0

* Estimated weight



SR700



SR759



INSTALLATION TOOLS


Single Rivet Applicator Tool

SRTA APPLICATOR COMPLETE

(Includes one SR-50 Driver Tool Complete)

(NOTE: For installation of R5, R5-1/2, and R6 Fasteners.)

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
30"	750	SRTA-30	41213	35.0
36"	900	SRTA-36	41214	41.8
42"	1050	SRTA-42	41215	48.6
48"	1200	SRTA-48	41216	55.8
60"	1500	SRTA-60	41218	69.8
72"	1800	SRTA-72	41219	83.0
84"	2130	SRTA-84	41220	85.2

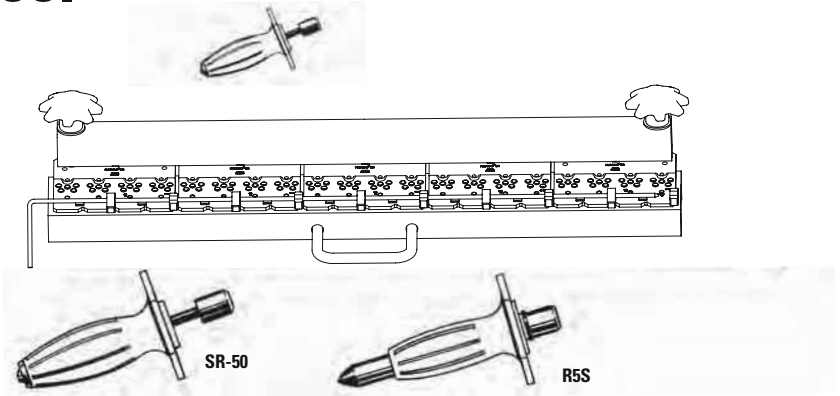

SINGLE RIVET DRIVER TOOL

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Driver Tool Complete	SR-50	40510	.8
Drive Rod	SR5-7	40517	.3

METAL TOOL BOX FOR SR™ and BR™ APPLICATOR TOOLS

DESCRIPTION	ORDERING NUMBER / ITEM CODE	WT. LBS.
36" Tool Box	40988	41.2
42" or 48" Tool Box	40990	48.2
60" Tool Box	40991	73.0

RIVET SET*


ORDERING NUMBER	ITEM CODE	WT. LBS.
R5S	40348	1.9

*If no SRTA Application Tool is available, fasteners may be installed with an R5S Flexco Rivet Set. See Instruction Sheet No. RH315.

FLEXCO® BELT GROOVER

(7/16" WIDE GROOVE PATH)


ORDERING NUMBER	ITEM CODE	WT. LBS.
FBG1	31978	1.8
EXTRA BLADES		
HSP3	31980	.1



FLEXCO® FSK™ BELT SKIVER

Width of Skive 2½" (64mm)

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Skiver Complete with Standard Blade	FSK-2	32051	20.7
Sharpening Stone		31987	0.5
STK Tool Box		50009	5.4
REPLACEMENT PARTS			
Skiver Blade-Standard	FSK-1B	31996	0.3
Skiver Blade-High Wear	FSK-1BA	31999	0.3
Skiver Ratchet Assembly	FSK-1R	31991	1.8
Skiver Chain	FSK-1C	31992	0.4
Skiver Sprocket	FSK-1S	31993	0.2
Skiver Fence Assembly	FSK-2F	32056	1.1
Replacement Front Drive Roller Assembly	FSK2-FDRA	32052	0.6



BELT CUTTERS

Please refer to page 78.


☐ **Stock Items** (non-shaded) carried in factory inventory.

☒ **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.



Flexco® SR™ Scalloped Edge™ Rivet Hinged Fasteners

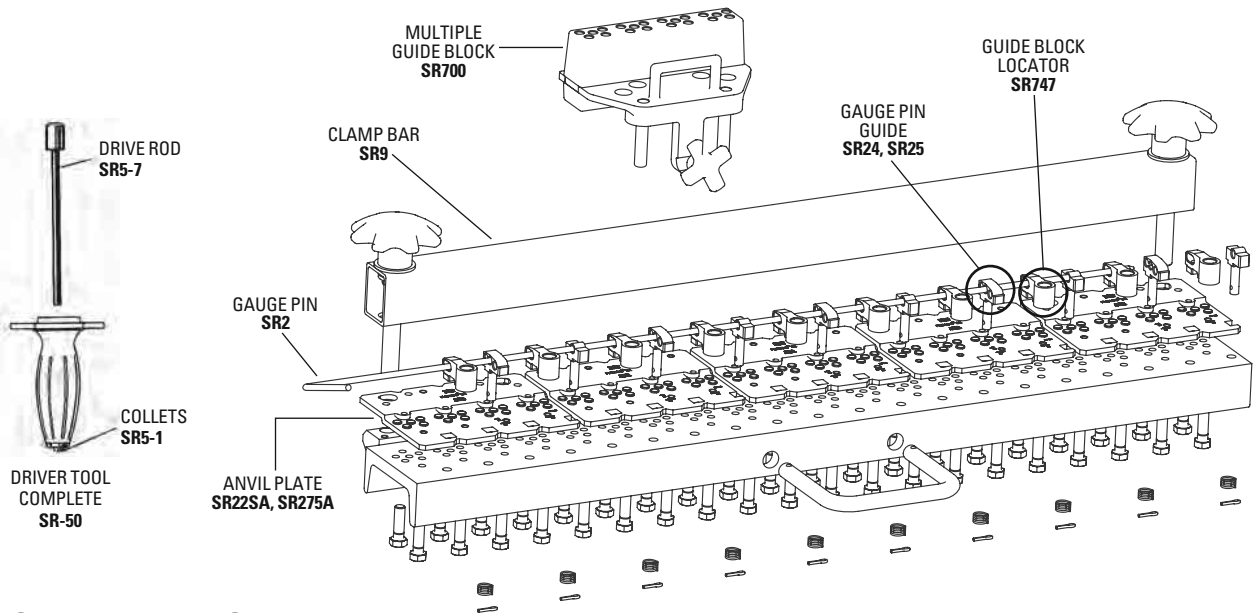

REPLACEMENT PARTS FOR SRT, SRTA, MSRT TOOLS

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Gauge Pin Guide with Spring and Cotter Pin	SR24	40503	.1
Gauge Pin Guide with Spring and Cotter Pin- for MSRT8	SR25	40504	.1
Stepped Anvil Plate Complete-for MSRT	SR22SA	40652	1.7
Stepped Anvil Plate Complete-for MSRT8	SR27SA	41778	1.7
Anvil Plate Screws (50/Package)	BRPS	40908	.7
Tightening Bolt Complete	SR23	40502	.2
Rivet Guide Locator Assembly	SR747	41056	.2
Clamping Screw	SR757	41057	.1
Collets-Set of Two	SR5-1	40511	.1
Gauge Pin for 30" Tool	SR2-30	40482	.5
Gauge Pin for 36" Tool	SR2-36	40483	.6
Gauge Pin for 42" Tool	SR2-42	40484	.7
Gauge Pin for 48" Tool	SR2-48	40485	.8
Gauge Pin for 60" Tool	SR2-60	40487	1.0
Gauge Pin for 72" Tool	SR2-72	40488	1.2
Gauge Pin for 84" Tool	SR2-84	40489	1.5
Clamp Bar for 30" Tool	SR9-30	40493	3.8
Clamp Bar for 36" Tool	SR9-36	40494	4.1
Clamp Bar for 42" Tool	SR9-42	40495	5.3
Clamp Bar for 48" Tool	SR9-48	40496	6.2
Clamp Bar for 60" Tool	SR9-60	40498	6.8
Clamp Bar for 72" Tool	SR9-72	40499	7.5
Clamp Bar for 84" Tool	SR9-84	40497	7.9

See Spare Parts Sheet FR-320.

PARTS REQUIRED TO SPAN THE ENTIRE WIDTH OF SRTA OR MSRT TOOLS

BELT WIDTH		SR700	SR747	SR24	SR25	SR22SA
in.	mm.	MULTIPLE GUIDE BLOCKS	RIVET GUIDE LOCATOR ASSEMBLIES	GAUGE PIN GUIDE	GAUGE PIN GUIDE	ANVIL PLATE COMPLETE
30	750	5	10	4	5	5
36	900	6	12	5	6	6
42	1050	7	14	6	7	7
48	1200	8	16	7	8	8
60	1500	10	20	9	10	10
72	1800	12	24	11	12	12
84	2130	14	28	13	14	14

REPLACEMENT PARTS FOR ALUMINUM MSRT TOOL

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Guide Locator	SR747-AL	43022	.2
Gauge Pin Guide	SR25-AL	43023	.1
Gauge Pin Guide	SR24-AL	43024	.1
Anvil Plate-5 Hole	SR22-AL	43025	1.7
Anvil Plate-8 Hole	SR27-AL	43026	2.5
Anvil Plate Screws	SRPS-AL	43027	.7
Clamp Bar Bolt	SR23-AL	43028	.2
Gauge Pin for 30" Tool	SR2-30-AL	43038	.5
Gauge Pin for 36" Tool	SR2-36-AL	43039	.6
Gauge Pin for 42" Tool	SR2-42-AL	43040	.7
Gauge Pin for 48" Tool	SR2-48-AL	43041	.8
Gauge Pin for 60" Tool	SR2-60-AL	43042	1.0
Gauge Pin for 72" Tool	SR2-72-AL	43043	1.2
Gauge Pin for 84" Tool	SR2-84-AL	43044	1.5
Gauge Pin for 96" Tool	SR2-96-AL	43045	2.0
Clamp Bar Nut W/Screws	SR91-AL	43029	.5
Clamp Bar Assembly for 30" Tool	SR9-30-AL	43030	3.8
Clamp Bar Assembly for 36" Tool	SR9-36-AL	43031	4.1
Clamp Bar Assembly for 42" Tool	SR9-42-AL	43032	5.3
Clamp Bar Assembly for 48" Tool	SR9-48-AL	43033	6.2
Clamp Bar Assembly for 60" Tool	SR9-60-AL	43034	6.8
Clamp Bar Assembly for 72" Tool	SR9-72-AL	43035	7.5
Clamp Bar Assembly for 84" Tool	SR9-84-AL	43036	7.9
Clamp Bar Assembly for 96" Tool	SR9-96-AL	43037	8.5

See Spare Parts Sheet X2090

- ☐ **Stock Items** (non-shaded) carried in factory inventory.
- ☒ **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.
- Non-Listed Items** are available. Request quote for price and delivery.

Flexco® SR™ Scalloped Edge™ Rivet Hinged Fasteners



POWER INSTALLATION TOOLS

ELECTRIC POWERED RIVET DRIVER KIT

(*Kit includes Driver, two Custom Drive Rods, Convenient Carrying Case)

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Standard Kit *	EPRDVK-1	41077	15.0
Replacement Drive Rod	EPRDVS-DR	41078	2.0

- For use with standard 110 volt electric
- Works with standard MSRT application tool and guide block




AIR POWERED RIVET DRIVER

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Air Powered Rivet Driver-Complete*	PTRDK	41835	5.0
REPLACEMENT PARTS			
Air Powered Rivet Driver	PTAH	41834	4.5
Retaining Spring	PTRD-RS	41837	0.3
Drive Rod with Hold Down Spring and Washer	PTRD-DR	41777	1.0
Hold Down Spring and Washer	DR-SW	41836	0.1

* Includes Air Powered Rivet Driver, Retaining Spring, and Drive Rod with Hold Down Spring and Washer.

- Requires a minimum 90 psi for operation
- Works with standard MSRT application tool and guide block

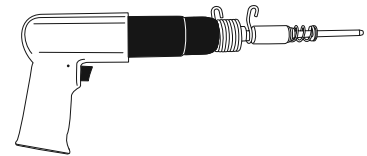

POWER SET™ RIVET DRIVER

(Includes one Power Set™ Rivet Driver, one regulator/filter/lubricator with fittings, 25 foot air hose with/fittings, steel guide block, and a special 'tee' fitting for multiple Power Set capability in a plastic carrying case.)

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Power Set Kit for R5, R5-1/2, & R6	MPSK5	43018	34.0
Power Set Kit for RAR8	MPSK8	43019	37.0


- For use with compressed air
- Works with Power Set steel guide block and standard MSRT application tool



STEEL GUIDE BLOCK ASSEMBLIES FOR THE HILTI DX 460-SR POWDER ACTUATED INSTALLATION TOOL

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Single Block-for one collated rivet strip	HRD-GB5-4	43020	10.0
Double Block-for two collated rivet strips	HRD-GB5-8	43021	20.0
Double Block-for eight pattern collated rivet strips	HRD-GB8-8	43059	25.6

- For use with the Hilti DX 460-SR Powder Actuated tool and special steel guide block assembly
- Works with standard MSRT application tool and special steel guide block



Purchase the Hilti DX 460-SR from Hilti Mining.



Phone: 1-800-950-6614

Fax: 1-800-950-6610

- Fully-automatic, .27 caliber powder-actuated fastening tool with power adjustment dial and automatic cartridge advance and piston return
- Approved for use in underground gassy mines - MSHA approval record: MSHA PAD-1/02





How Flexco® Bolt Solid Plate Fasteners Work

Strength of this fastener is derived from the compression of the plates, mounted above and below the belt, with high tensile strength bolts. This "compression" distributes the splice tension across the full width of each fastener plate. The holding ability is, thereby, increased by not solely relying upon the bolts to resist pull-out.

Additional strength and resistance to pull-out is obtained from the specially formed teeth on each plate. These teeth imbed deep into the belt carcass, without damaging the carcass fibers.

A tight butt splice is achieved through the exaggerated bolt hole spacing in the templet which forces the belt end together. Flexco® Bolt Solid Plate Fasteners permit natural conformance with troughing or transition idlers.


140, 190 and 2-1/2 size fasteners are specifically designed for thinner belting, allowing increased compression, greater reach-back, and more fastener plates per belt width.

Applications	Installation Method	What You Need for Installation
Higher-tension main haulage belts in - Coal - Grain Elevators - Hard-Rock Mining - Aggregate Plants - Steel Mills - Foundries	Holes are punched in belt quickly and accurately with a templet and boring tool. Fasteners are installed on-site with portable, hand, or power tools.	- Fastener Plates - Bolts & Nuts - Templet - Belt Punch - Wrench - Bolt Horn - Flexco Installation Tool - Impact Tool or Carpenter's Brace
How to Specify the Correct Flexco® Bolt Solid Plate Fastener	Fastener Metal Selection	Hinge Pin Selection
- Determine Belt Tension (PIW). - Measure your Belt Thickness. - Measure the Diameter of the Smallest Pulley in your Drive with Belt Wrap more than 90°. - Choose the fastener size that is appropriate for your specifications in the selection chart below.	Steel. For most applications, plated steel is recommended. MegAlloy®. For superior resistance to wear and abrasion. Stainless Steel. Type 316 Stainless Steel provides extra resistance to abrasion, magnetic attraction and corrosion from acids and chemicals. Everdur®. Spark-free material compared to steel and fully non-magnetic. Flexco®VP®. Rubber covered steel top plates. Promal. For superior abrasion resistance. Some minor chemical and corrosion resistance.	No Hinge Pin Required.

Flexco® Bolt Solid Plate Fastener Selection Chart

Fastener Size	For Belts With Mechanical Fastener Ratings Up To:		Belt Thickness Range		Recommended Min. Pulley Diameter (90°)					
					Operating Tension 75-100% of Belt Rating		Operating Tension 50-75% of Belt Rating		Operating Tension Under 50% of Belt Rating	
	P.I.W.	kN/m	in.	mm	in.	mm	in.	mm	in.	mm
1	150	30	3/16-7/16	5-11	12	300	10	260	8	200
140*, 140VP	225	40	3/16-7/16	5-11	14	360	12	300	10	250
190, 190VP	375	65	5/16-9/16	8-14	18	460	16	410	14	360
1-1/2	300	50	7/16-11/16	11-17	18	460	16	410	14	360
2, 2VP	440	75	9/16-13/16	14-21	30	760	28	710	24	610
2-1/4	620	105	9/16-1-3/16	14-30	36	920	34	860	34	860
2-1/2	450	75	3/4-1	19-25	42	1070	42	1070	42	1070
3	560	100	15-16 & over	24 & over	48	1220	48	1220	48	1220

Flexco® Bolt Solid Plate Fasteners



FASTENERS

"E" BOX 25 FASTENER SETS

ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	WT. LBS.
STEEL		MEGALLOY® TOP & BOTTOM PLATES, STEEL BOLTS & NUTS		STAINLESS – 300 SERIES		EVERDUR		
1E	20002	140EMAP	20364	140ES	20034	140EE	20090	2.9
140E	20000	190EMAP	20365	190ES	20035	190EE	20091	4.6
190E	20001							4.8
1-1/2E	20004	1-1/2EMAP	20366	1-1/2ES	20038	1-1/2EE	20094	5.9
2E	20005	2EMAP	20367	2ES	20039	2EE	20095	8.0
2-1/4E	20006	2-1/4EMAP	20368	2-1/4ES	20040	2-1/4EE	20096	10.8
2-1/2*	20007							6.4
3*	20008							7.0

*10 Fastener Sets

"E" BOX 25 FASTENER SETS

ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	WT. LBS.
PROMAL TOP PLATES BALANCE STEEL		MEGALLOY® TOP PLATES BALANCE STEEL		300 SERIES STAINLESS TOP PLATES, BALANCE STEEL		1/8" RUBBER-COVERED T.P. BALANCE STEEL		
140EP	20164	140EMA	20330	140EST	20118			
		190EMA	20331	190EST	20119			
1-1/2EP	20168	1-1/2EMA	20334	1-1/2EST	20122			
2EP	20169	2EMA	20335	2EST	20123			
		2-1/4EMA	20336	2-1/4EST	20124	2-1/4ERCT	20191	10.3

"C" BUCKET (100 FASTENER SETS – BOTTOM PLATES PRE-ASSEMBLED)

ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	WT. LBS.
STEEL		MEGALLOY® TOP PLATES BALANCE STEEL		MEGALLOY® TOP & BOTTOM PLATES, STEEL BOLTS & NUTS		
1C	20014	1CMA	20327			10.9
140C	20012	140CMA	20340	140CMAP	20370	15.7
190C	20013	190CMA	20341	190CMAP	20371	18.5
1-1/2C	20016	1-1/2CMA	20344	1-1/2CMAP	20372	21.9
2C	20017	2CMA	20345	2CMAP	20373	30.3
2-1/4C	20018	2-1/4CMA	20346			42.3
2-1/2C*	20019					64.0
3C*	20020					69.0

*Packaged in Cartons.

NOTE: Stainless and Everdur fastener sets are also available in "C" Buckets.

FASTENER SETS

REQUIRED FOR VARIOUS BELT WIDTHS

BELT WIDTH		FASTENER SIZE 1, 140 & 190				FASTENER SIZE 1-1/2, 2 & 2-1/4				FASTENER SIZE 2-1/2 & 3			
		90°		45°		90°		45°		90°		45°	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
12	300	10	9	12	12	8	8	9	10	6	6	7	7
18	450	15	14	19	19	12	11	15	15	9	9	12	12
24	600	20	19	26	26	16	15	21	21	12	13	17	16
30	750	25	24	33	33	20	19	27	27	16	16	21	21
36	900	30	29	41	40	24	23	33	32	19	19	26	26
	1000		32		45		26		36		21		29
42	1050	35	34	48	47	28	27	39	38	22	21	31	30
48	1200	40	39	55	54	32	31	44	43	26	26	35	35
54	1350	45	44	63	61	36	35	48	49	29	29	40	40
60	1500	50	49	69	68	40	39	56	55	32	32	44	44
72	1800	61	59	83	82	48	49	68	65	39	39	53	53

NOTE: Required fastener sets may vary from those listed depending on exact fastener size.

FLEXCO® VP™ FASTENERS

RUBBER COVERED TOP PLATES BALANCE STEEL				RUBBER COVERED TOP PLATES MEGALLOY® BOTTOM PLATES			
BOX*				BOX*			
ORDERING NUMBER	ITEM CODE	PLATES PER STRIP	STRIPS PER BOX	ORDERING NUMBER	ITEM CODE	PLATES PER STRIP	STRIPS PER BOX
140VP	20057	6	5	140VPMA	20081	6	5
190VP	20056	6	5	190VPMA	20080	6	5
2VP	20058	4	6				
BUCKET				BUCKET			
140VPB	20061	6	16	140VPBMA	20082	6	16
190VPB	20059	6	16	190VPBMA	20080	6	16
2VPB	20083	4	24				


* Box quantities provide enough fasteners to splice a 36" (900mm) belt.



Stock Items (non-shaded) carried in factory inventory.

Made To Order Items (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.



Flexco® Bolt Solid Plate Fasteners

INSTALLATION TOOLS

90° TEMPLETS

BELT WIDTH	ORDERING NUMBER	ITEM CODE
in.	mm	1
12"	300	1-12 30516
14"	350	1-14 30517
16"	400	1-16 30518
18"	450	1-18 30519
20"	500	1-20 30520
24"	600	1-24 30521
26"	650	
28"	700	
30"	750	1-30 30524
36"	900	1-36 30525
42"	1050	1-42 30526
48"	1200	1-48 30527
60"	1500	
2-1/4		
20"	500	
24"	600	2-1/4-24 30585
30"	750	2-1/4-30 30588
36"	900	2-1/4-36 30589
42"	1050	2-1/4-42 30590
48"	1200	2-1/4-48 30591
54"	1350	2-1/4-54 30592
60"	1500	2-1/4-60 30593
72"	1800	2-1/4-72 30594

ORDERING NUMBER	ITEM CODE
140	
140-12	30483
140-14	30484
140-16	30485
140-18	30486
140-20	30487
140-24	30488
140-30	30491
140-36	30492
140-42	30493
140-48	30494
1-1/2	
1-1/2-12	30548
1-1/2-18	30551
1-1/2-20	30552
1-1/2-24	30553
1-1/2-30	30556
1-1/2-36	30557
1-1/2-42	30558
1-1/2-48	30559
1-1/2-54	30560
1-1/2-60	30561
1-1/2-72	30562
2-1/2	
2-1/2-20	30600
2-1/2-24	30601
2-1/2-30	30604
2-1/2-36	30605
2-1/2-42	30606
2-1/2-48	30607
2-1/2-54	30608
2-1/2-60	30609
2-1/2-72	30610



ORDERING NUMBER	ITEM CODE	WT. LBS.
190		
190-12	30500	1.3
190-14	30501	1.5
190-16	30502	1.7
190-18	30503	1.9
190-20	30504	2.1
190-24	30505	2.6
190-26	30506	2.6
190-28	30507	3.0
190-30	30508	3.3
190-36	30509	3.9
190-42	30510	4.5
190-48	30511	4.8
190-60	30513	5.9
2		
2-12	30564	1.2
2-18	30567	1.9
		1.8
2-24	30569	2.5
2-30	30572	3.1
2-36	30573	3.8
2-42	30574	4.4
2-48	30575	5.2
2-54	30576	5.6
2-60	30577	6.6
2-72	30578	7.2
3		
		2.9
		3.5
		4.4
3-36	30620	5.3
3-42	30621	6.2
3-48	30622	7.1
		7.9
3-60	30624	8.8
3-72	30625	10.6

45° TEMPLETS

ORDERING NUMBER	ITEM CODE
1	
1-12-45	30673
1-18-45	30676
1-24-45	30678
1-30-45	30681
1-36-45	30682
1-48-45	30684

ORDERING NUMBER	ITEM CODE
140	
140-24-45	30647
140-30-45	30650
140-36-45	30651
140-42-45	30652
140-48-45	30653
140-60-45	30655
1-1/2	
1-1/2-18-45	30707
1-1/2-24-45	30709
1-1/2-30-45	30712
1-1/2-36-45	30713
1-1/2-42-45	30714
1-1/2-48-45	30715
1-1/2-60-45	30717

ORDERING NUMBER	ITEM CODE	WT. LBS.
190		
190-18-45	30661	2.3
190-24-45	30663	3.0
190-30-45	30666	3.7
190-36-45	30667	4.5
190-42-45	30668	5.2
190-48-45	30669	6.0
190-60-45	30671	7.5
2		
2-24-45	30725	3.0
2-30-45	30728	3.7
2-36-45	30729	5.3
2-42-45	30730	5.2
2-60-45	30733	7.5



- ☐ **Stock Items** (non-shaded) carried in factory inventory.
- ☐ **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.
- Non-Listed Items** are available. Request quote for price and delivery.

Flexco® Bolt Solid Plate Fasteners



INSTALLATION TOOLS

HAND & POWER TOOLS

HAND TOOLS	DESCRIPTION	FOR FASTENER NUMBER	ORDERING NUMBER	ITEM CODE	WT. LBS.
	BOLT HORN		2BH	30480	.1
	BOLT BREAKER (Two Per Package)	1,140,190 & RP1 1½, 2, 2¼ & RP2 2½ & 3	110 112* 113*	30474 30475 30479	1.2 1.4 2.0
	PUNCH	1,140,190 & RP1 1½, 2, 2¼ & RP2 2½ & 3	P1P P2P P3P	30460 30461 30462	.1 .2 .3
	BORING BIT	1,140,190 & RP1 1½, 2, 2¼ & RP2 2½ & 3	B1B B2B B3B	30468 30469 30470	.1 .1 .1
POWER TOOLS	WRENCH	1,140,190 & RP1 1½, 2, 2¼ & RP2 2½ & 3	S1S** S2S S3S	30442 30443 30444	.2 .2 .2
	POWER PUNCH	1,140,190 & RP1 1½, 2, 2¼ & RP2 2½ & 3	HP1 HP2 HP3	30463 30464 30465	.2 .2 .2
	POWER BORING BIT	1,140,190 & RP1 1½, 2, 2¼ & RP2 2½ & 3	HB1 HB2 HB3	30471 30472 30473	.1 .1 .1
	POWER WRENCH	GREEN 1,140,190 & RP1 RED 1½, 2, 2¼ & RP2 BLUE 2½ & 3	HW1** HW2 HW3	30447 30448 30449	.3 .3 .4
	QUICK CHANGE CHUCK		5552	30481	.4

* Sizes 112 & 113 are straight bolt breakers – no bend.

** For use with slotted nuts only.

FLEXCO-LOK®

Belt tape 100' per carton

FASTENER SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.	TAPE WIDTH
Nos. 140, 1	FL7C	30888	.8	7/16"
Nos. 190	FL11C	30889	1.0	11/16"
1-1/2, 2, 2-1/4				



CRACKING CHISEL


NUT SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
1, 140 or 190	C1C	30438	1.2
1-1/2, 2, 2-1/4	C2C	30439	1.2
2-1/2-3	C3C	30603	1.6



FLEXCO® BELT GROOVER

(7/16" wide groove path)

ORDERING NUMBER	ITEM CODE	WT. LBS.
FBG1	31978	1.8
EXTRA BLADES		
HSP3	31980	.1



FLEXCO® SILICONE LUBRICANT

ORDERING NUMBER	ITEM CODE	PKG. QTY.	WT. LBS.
SL5-1	30932	1	1.4





NAILS FOR TEMPLETS

FOR USE WITH TEMPLETS	ORDERING NUMBER	ITEM CODE	WT. LBS.	NAILS/PKG. (Approx.)
#1, 140, 1-1/4 & 190	6D	30436	1.0	142
#1-1/2, 2, 2-1/4, 2-1/2 & 3	8D	30437	1.0	90

FLEXCO® BELT IDENTIFICATION TOOL

ORDERING NUMBER	ITEM CODE	WT. LBS.
BT-1	31075	.06





Flexco® Bolt Solid Plate Fasteners


Exclusive Piloted Bolt Design Simplifies Installation:

The new piloted bolt is currently being phased in to replace standard bolt designs.

To order the new piloted bolts as they become available, use standard bolt ordering numbers.

EXTRA BOLTS PER 100

FOR FASTENER NUMBER	ORDERING NUMBER / ITEM CODE	ORDERING NUMBER / ITEM CODE	ORDERING NUMBER / ITEM CODE	WT. LBS.
	STEEL	STAINLESS – 300 SERIES	EVERDUR	
1	20391			
140 & 190	20399	20400	20397	2.4
RP1	20398		20397	2.1
1-1/2, 2 & RP2	20406	20407	20409	4.1
2-1/4	20410	20411	20412	4.8
2-1/2 & 3	20414			7.2




EXTRA NUTS PER 100

FOR FASTENER NUMBER	ORDERING NUMBER / ITEM CODE	ORDERING NUMBER / ITEM CODE	ORDERING NUMBER / ITEM CODE	WT. LBS.
	STEEL	STAINLESS – 300 SERIES	EVERDUR	
1, 140, 190 & RP1	20377	20381	20387	.8
1-1/2,				
2, 2-1/4, & RP2	20378	20382	20388	1.1
2-1/2 & 3	20379			2.2

RIP REPAIR FASTENERS

ORDERING NUMBER	ITEM CODE	BOX QTY.	WT. LBS.
STEEL			
RP1E	20010	25	4.7
RP1C	20022	100	19.1
RP2E	20011	25	10.2
RP2C	20023	100	42.0
2-1/4E	20006	25	10.6
2-1/4C	20018	100	43.0
STAINLESS			
RP1ES	20041	25	4.9
RP2ES	20042	25	10.1
2-1/4ES	20040	25	10.7
EVERDUR			
2-1/4EE	20096	25	11.6

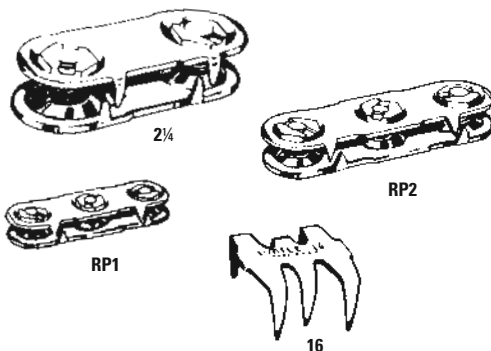

RIP REPAIR SELECTION INFORMATION

Belt Thickness		Fastener Size
in.	mm.	
3/8-9/16	10-14	No. 16
1/4-1/2	6-13	RP1
3/8-13/16	10-21	RP2
9/16-1-3/16	14-30	2-1/4


TURTLE® FASTENER—STEEL

ORDERING NUMBER	ITEM CODE	BOX QTY.	WT. LBS.
16	20206	50	4.3

WEDLOK®

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Splice Kit*	2W	20200	4.0
Stainless Splice Kit	2WS	20201	4.0
Leading End Kit	2WL	20202	3.0
Trailing End Kit	2WT	20203	2.9
Templet Set	T2W	20204	6.3
72" Side Templet	T2WS72	20205	7.6

*Stainless Top Plates, Balance Steel.

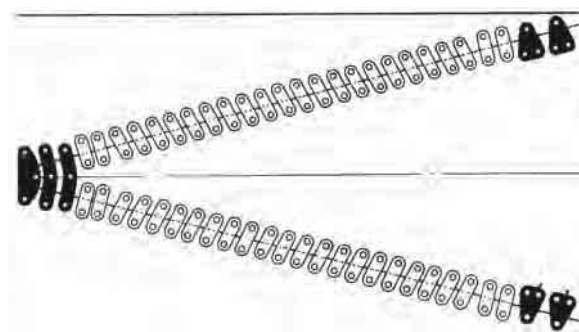


WEDLOK SPLICE KIT

 **Stock Items** (non-shaded) carried in factory inventory.

 **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.



How Flexco® Rivet Solid Plate Fasteners Work

The Flexco® BR™ fastener offers longer service life in demanding, higher-tension applications and is an excellent replacement for vulcanized splicing in a wide range of industries.

Designed for high strength synthetic carcass belting, the fastener is installed with a staggered pattern of rivets to ensure maximum grip on the belt fibers. Working between these fibers without severing them, the strength of the belt is left intact. The specially-shaped head of each pilot nail

works with the installation tool's anvil plate to "self-set" the rivets.


The same hammer blows that drive and set the rivets also tightly compress the fastener plates for the strongest possible splice. The broad width and heavy gauge of the plates give extended wear life. These plates compress uniformly and are specially coined so there are no high spots or edges to hang up.

Applications	Installation Method	What You Need for Installation
- Sand - Gravel - Crushed Stone - Grain - Coal - Cement - Salt	Designed for fast, simple installation. All that is needed is a hammer and the portable MBRT tool. Belt ends and fastener strip are held in proper alignment. Upon proper alignment, the rivets can be hammer-driven and set from the top side of belt.	- Fasteners - Rivets - Flexco Installation Tool - Hammer
How to Specify the Correct Flexco® Rivet Solid Plate Fastener	Fastener Metal Selection	Hinge Pin Selection
- Determine Belt Tension (PIW). - Measure your Belt Thickness. - Measure the Diameter of the Smallest Pulley in your Drive with Belt Wrap more than 90°. - Choose the fastener size that is appropriate for your specifications in the selection chart below.	Steel. For most applications, plated steel is recommended. MegAlloy®. For superior resistance to wear and abrasion. Stainless Steel. Type 316 Stainless Steel provides extra resistance to abrasion, magnetic attraction and corrosion from acids and chemicals. Everdur®. Spark-free material compared to steel and fully non-magnetic.	No Hinge Pin Required.

Flexco® Rivet Solid Plate Fastener Selection Chart

Fastener Size	For Belts With Mechanical Fastener Ratings Up To:		Belt Thickness Range		Recommended Min. Pulley Diameter					
					Operating Tension 75-100% of Belt Rating		Operating Tension 50-75% of Belt Rating		Operating Tension Under 50% of Belt Rating	
	P.I.W.	kN/m	in.	mm	in.	mm	in.	mm	in.	mm
BR6	400*	70*	1/4-21/32	6.5-17	14	350				
BR10	650	114	7/32-11/16	6-17	18	450	16	400	14	350
BR14	800	140	13/32-15/16	10-24	36	900	34	860	34	860

* Contact Flexco Engineering for applications greater than 400 PIW (70kN/m).



Flexco® BR™ Rivet Solid Plate Fasteners

FASTENERS



Order each component separately for a complete splice: Fasteners + Rivets

FLEXCO® BR6 FASTENERS

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	STEEL		
24	600	BR6-SE-24	40658	4.6
30	750	BR6-SE-30	40682	5.7
36	900	BR6-SE-36	40683	7.0
42	1050	BR6-SE-42	40684	8.0
STAINLESS				
24	600	BR6S-SE-24	40769	4.6
30	750	BR6S-SE-30	40787	5.7
36	900	BR6S-SE-36	40790	6.9
42	1050	BR6S-SE-42	40791	7.8

Each box of BR6 fasteners contains 4 fastener strips and hold down assembly clips.

FLEXCO® BR6 MEGALLOY®

ORDERING NUMBER	ITEM CODE	WT. LBS.
BR6MA-SE	41776	5.5

Each box of BR6 MegAlloy contains Ten 9-Plate fastener strips for 60"/1500 mm of splicing.

Fasteners and Rivets Required for one BR6 Joint

BELT WIDTH		FASTENER SETS REQUIRED	RIVETS REQUIRED
in.	mm		
24	600	18	108
30	750	22	132
36	900	27	162
42	1050	31	186
48	1200	36	216
60	1500	44	264
72	1800	54	324
84	2130	62	372
96	2430	72	432

RIVET SELECTION CHART

FASTENER SIZE	BELT THICKNESS RANGE		RIVET SIZE
	in.	mm	
BR6	1/4 - 11/32	6.5-9	A
	5/16 - 13/32	8-10.5	B
	3/8 - 15/32	9.5-12	C
	7/16 - 17/32	11-13.5	C/D
	1/2 - 19/32	13-15	D
BR10	9/16 - 21/32	14-17	E
	7/32-5/16	6-8	SRA
	9/32-3/8	7-9.5	SRB
	11/32-7/16	9-11	SRC
	13/32-1/2	10-13	SRC/D
BR14	15/32-9/16	12-14	SRD
	17/32-5/8	13.5-16	SRE
	19/32-11/16	15-17	SRE
	13/32-1/2	10-13	SRD
	15/32-9/16	12-14	SRE
	17/32-5/8	13.5-16	SRE
	19/32-11/16	15-17	SRG
	21/32-3/4	16-19	SRH
	23/32-13/16	18-21	SRI
	25/32-7/8	20-22	SRJ
	27/32-15/16	21-24	SRK

FLEXCO® BR10 & BR14 FASTENERS




FASTENER METAL	ORDERING NUMBER	ITEM CODE	WT. LBS.
BOX (35 Fasteners)			
STEEL	BR-10-SE	40750	8.0
MEGALLOY®	BR-10MA-SE	40752	7.9
STAINLESS	BR-10S-SE	40751	8.1
EVERDUR	BR-10E-SE	40753	7.9
STEEL	BR-14	40755	12.9
MEGALLOY®	BR-14MA	40756	13.1

ADDITIONAL FASTENER PARTS

DESCRIPTION	PKG. QTY.	ORDERING NUMBER	ITEM CODE	WT. LBS.
Hold Down Clips for BR10	23	BR101	40786	.5
Hold Down Clips for BR14	23	BR141	40788	.4
Black Plastic Retainers	49	BR103	40789	.1


Flexco® Rivet Solid Plate Fasteners And Rivets Required For one BR10 or BR14 Joint and Various Belt Widths

BELT WIDTH		SETS OF BR-10 OR BR-14 FASTENERS REQUIRED	RIVETS NEEDED FOR COMPLETE SPLICE	
in.	mm		BR-10	BR-14
18	450	10	100	140
24	600	14	140	196
26	650	15	150	210
28	700	16	160	224
30	750	17	170	238
36	900	21	210	294
42	1000	23	230	322
	1050	24	240	336
	1200	27	270	378
48	1200	28	280	392
	1350	31	310	434
	60	35	350	490
72	1800	41	410	574
	2100	42	420	588
		48	480	672



- ☐ **Stock Items** (non-shaded) carried in factory inventory.
- ☐ **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.
- Non-Listed Items** are available. Request quote for price and delivery.

Flexco® BR™ Rivet Solid Plate Fasteners



RIVETS

Self-setting, pre-assembled with pilot nails



STEEL

ORDERING NUMBER	ITEM CODE	BOX QTY.	WT. LBS.
BOX (100 Rivets)			
SRA-100	40539	100	.9
SRB-100	40540	100	1.0
SRC-100	40541	100	1.1
BOX (250 Rivets)			
SRA	40527	250	2.3
SRB	40528	250	2.5
SRC	40529	250	2.6
SRC/D	40538	250	2.8
SRD	40530	250	2.9
SRE	40531	250	3.1
SRF	40532	250	3.1
SRG	40533	250	3.2
SRH	40534	250	3.4
SRI	40535	250	3.5
SRJ	40536	250	3.6
SRK	40537	250	3.7
BUCKET (2000 Rivets)			
SRA-2M	41190	2000	16.6
SRB-2M	41191	2000	18.1
SRC-2M	41192	2000	20.2
SRC/D-2M	41193	2000	21.2
SRD-2M	41194	2000	21.9
SRE-2M	41195	2000	23.1
SRF-2M	41196	2000	24.4
SRG-2M	41197	2000	24.9
SRH-2M	41198	2000	25.1
SRI-2M	41199	2000	25.9

STAINLESS (TYPE 430)

ORDERING NUMBER	ITEM CODE	BOX QTY.	WT. LBS.
BOX (250 Rivets)			
SRA-S	40542	250	2.3
SRB-S	40543	250	2.5
SRC-S	40544	250	2.6
SRC/D-S	40548	250	2.8
SRD-S	40545	250	2.9
SRE-S	40546	250	3.1
SRF-S	40547	250	3.1
SRG-S	40523	250	3.2
SRH-S	40522	250	3.4
SRI-S	40506	250	16.7
SRJ-S	40507	250	18.4
SRK-S	40520	250	19.9
BUCKET (2000 Rivets)			
SRA-S-2M	41200	2000	17.1
SRB-S-2M	41201	2000	18.9
SRC-S-2M	41202	2000	20.6
SRC/D-S-2M	41203	2000	21.3
SRD-S-2M	41204	2000	21.9
SRE-S-2M	41205	2000	22.9
SRF-S-2M	41206	2000	23.5
SRG-S-2M	41207	2000	24.7
SRH-S-2M	41208	2000	25.1
SRI-S-2M	41181	2000	26.3
SRJ-S-2M	41183	2000	27.5
SRK-S-2M	41185	2000	28.7

RAPID LOADER™ RIVET STRIPS

Self-setting, pre-assembled with pilot nails

FOR FLEXCO® BR6

32 Strips/ 768 Rivets per Bucket

DESCRIPTION		ORDERING NUMBER	ITEM CODE	WT. LBS.
Size	Color Code			
STEEL				
A	Red	CBR6A	41785	10.5
B	White	CBR6B	41786	11.0
C	Blue	CBR6C	41788	11.0
C/D	Orange	CBR6C/D	41792	4.5
D	Green	CBR6D	41793	12.0
E	Purple	CBR6E	41794	12.0
F	Yellow			
STAINLESS (SERIES 400)				
A	Red	CBR6A-S	41795	10.0
B	White	CBR6B-S	41796	10.5
C	Blue	CBR6C-S	41797	11.0
C/D	Orange	CBR6C/D-S	41798	11.5
D	Green	CBR6D-S	41799	12.0
E	Purple	CBR6E-S	41800	12.0
F	Yellow			

FOR FLEXCO® BR10

60 Strips / 1200 Rivets per Bucket

ORDERING NUMBER	ITEM CODE	WT. LBS.
STEEL		
CSRLA	40857	13.00
CSRLB	40858	13.92
CSRLC	40859	14.84
CSRLC/D	40860	15.56
CSRLD	40861	16.06
CSRLE	40862	16.62
CSRLF	40863	17.34
STAINLESS		
CSRLA-S	40978	12.90
CSRLB-S	40979	13.80
CSRLC-S	40980	14.92
CSRLC/D-S	40981	15.31
CSRLD-S	40982	15.92
CSRLE-S	40983	16.48
CSRLF-S	40984	16.94

RAPID LOADER™ RIVET STRIPS

WITH WASHERS

(For BR10)

For use with the Flexco® Power Set™ Rivet Driver and Hilti DX 460-SR installation tool

60 Strips / 1200 Rivets per Bucket


DESCRIPTION		ORDERING NUMBER	ITEM CODE	WT. LBS.
Size	Color Code			
STEEL				
A	Red	CSRLA-W	40891	13.00
B	White	CSRLB-W	40892	13.92
C	Blue	CSRLC-W	40893	14.84
C/D	Orange	CSRLC/D-W	40895	15.56
D	Green	CSRLD-W	40897	16.06
E	Purple	CSRLE-W	40898	16.62
F	Yellow	CSRLF-W	40899	17.34
G	Black	CSRLG-W	40901	17.90
STAINLESS (TYPE 430)				
A	Red	CSRLA-S-W	40955	12.90
B	White	CSRLB-S-W	40956	13.80
C	Blue	CSRLC-S-W	40957	14.92
C/D	Orange	CSRLC/D-S-W	40958	15.31
D	Green	CSRLD-S-W	40959	15.92
E	Purple	CSRLE-S-W	40961	16.48
F	Yellow	CSRLF-S-W	40969	16.94
G	Black	CSRLG-S-W	40971	17.52



2M RIVET BUCKET
(Contains 2000 Rivets)



NOTE: Use standard rivet selection criteria for collated rivet strips.





Flexco® BR™ Rivet Solid Plate Fasteners

INSTALLATION TOOLS

Multiple Rivet Applicator Tool

For Power Installation of Flexco® BR™ Fasteners, see page 59.

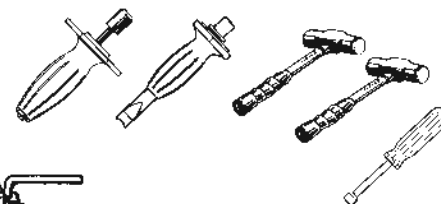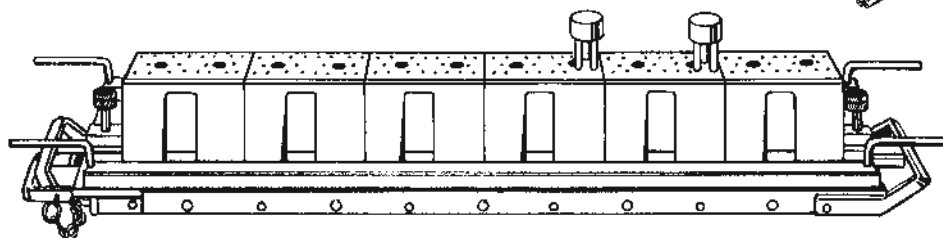

MBRTA TOOL WITH
MULTIPLE RIVET DRIVER

MBRTA APPLICATOR TOOL Complete (For BR10 and BR14)

(Includes two SR759 Multiple Drive Rods, BR500D Multiple Guide Blocks, one SR-50 Driver Tool, one BR151 Bridge Removal Tool, one Nut Driver, two 4 lb. Hammers, Lubricant and Metal Tool Box.)

TOOL WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.	MULTIPLE GUIDE BLOCKS INCLUDED
in.	mm				
30	750	MBRTA-30	40927	111.3	4
36	900	MBRTA-36	40928	115.5	5
42	1050	MBRTA-42	40920	125.0	6
48	1200	MBRTA-48	40921	166.6	7
60	1500	MBRTA-60	40922	178.6	9
72	1800	MBRTA-72	40923	192.3	10
84	2130	MBRTA-84	40924	227.8	12
96	2430	MBRTA-96	40925	263.2	14

ALUMINUM MBRT6 APPLICATOR Complete

(Includes one BR359 three prong multiple drive rod, two BR300 multiple guide blocks, one BR151 bridge removal tool, one 4 lb. hammer, and lubricant.)

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
30	750	MBRT6-30-AL	41089	75.0
36	900	MBRT6-36-AL	41097	85.0
42	1050	MBRT6-42-AL	41098	92.0
48	1200	MBRT6-48-AL	41099	106.0
60	1500	MBRT6-60-AL	41107	120.0
72	1800	MBRT6-72-AL	41123	136.0
84	2130	MBRT6-84-AL	41124	156.0
96	2430	MBRT6-96-AL	41126	173.0

ALUMINUM MBRT10 APPLICATOR Complete

(Includes one SR759 five prong multiple drive rod, two BR500D multiple guide blocks, one BR151 bridge removal tool, one 4 lb. hammer, and lubricant.)

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
30	750	MBRT10-30-AL	41138	79.0
36	900	MBRT10-36-AL	41139	89.0
42	1050	MBRT10-42-AL	41148	138.0
48	1200	MBRT10-48-AL	41149	105.0
60	1500	MBRT10-60-AL	41152	124.0
72	1800	MBRT10-72-AL	41153	141.0
84	2130	MBRT10-84-AL	41168	161.0
96	2430	MBRT10-96-AL	41179	177.0

MBRT TOOL COMPONENTS

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Multiple Guide Block-Blue, BR6	BR300	40882	3.8
Multiple Drive Rod-3 Prong	BR359	41187	1.0
Multiple Guide Block-Yellow, BR10, BR14	BR500D	41016	3.0
Multiple Drive Rod-5 Prong	SR759	41055	.9
Nut Driver	41008	41008	.5
Driver Tool Complete	SR-50	40510	.8
Bridge Removal Tool	BR151	40760	.5
Silicone Lubricant	SL5-1	30932	1.4
Four lb. Hammer	4FH	30435	5.3

ACCESSORY TOOLS

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Repair Tool Kit Complete	BRR-1014	40794	3.8
Anvil Plate w/Screws	BRP3	40907	.9
Center Block w/Screws	BRR-11	40796	.6
Center Punch	BRR-DP	40793	.1
Flexco Belt Groover	FBG1	31978	1.8
Extra Blades	HSP3	31980	.1

METAL TOOL BOX FOR SR™ and BR™ APPLICATOR TOOLS

DESCRIPTION	ORDERING NUMBER/ITEM CODE	WT. LBS.
36" Tool Box	40988	41.2
42" or 48" Tool Box	40990	48.2
60" Tool Box	40991	73.0



BELT CUTTERS /SKIVER

Please refer to pages 78 and 79.

Aluminum Content

ALUMINUM ALLOY TYPE	PERCENT	
	Mg -Magnesium	Ti -Titanium
5356	5.5	0.2
6005	0.6	0.1
6061	1.0	0.0
7075	2.5	0.0

Flexco® BR™ Rivet Solid Plate Fasteners

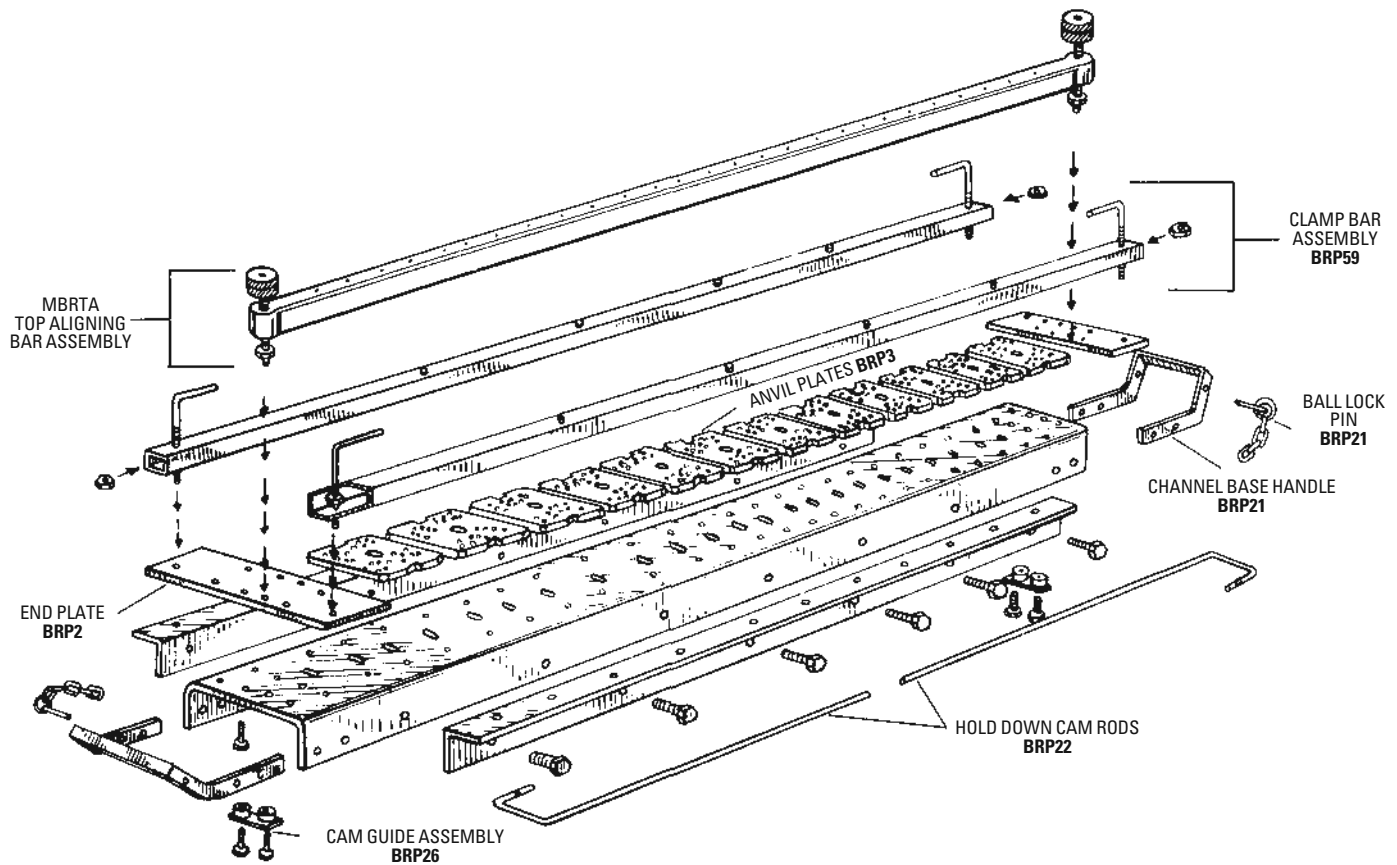


MBRTA APPLICATOR TOOL – REPLACEMENT PARTS

DESCRIPTION	TOOL WIDTH in. mm	ORDERING NUMBER	ITEM CODE	WT. LBS.
Clamp Bar Assembly	30" 750	BRP59-30	40800	5.1
	36" 900	BRP59-36	40801	5.7
	42" 1050	BRP59-42	40802	6.3
	48" 1200	BRP59-48	40803	7.0
	60" 1500	BRP59-60	40804	7.9
MBRTA Top Aligning Bar Assembly (Includes two end plates and fasteners)	30" 750	BR-530	41020	4.7
	36" 900	BR-536	41021	5.0
	42" 1050	BR-542	41022	5.3
	48" 1200	BR-548	41023	6.0
	60" 1500	BR-560	41024	7.4
Channel Base Assembly (Includes Channel Base, Anvil plates, End plates, and Gauge Rod Guides)	42" 1050	BRP100-42	40915	51.0
	48" 1200	BRP100-48	40916	58.0
	60" 1500	BRP100-60	40918	72.5
	72" 1800	BRP100-72	40919	87.0
Anvil Plate Assembly (includes screws)		BRP3	40907	.9
Anvil Plate Screws		BRPS	40908	.5
Channel Base Handle		BRP21	40930	.6
Ball Lock Pin w/Chain		BRP31	40960	.1
Hold Down Cam Rods (Includes Two)	30" 750	BRP22-30	40962	.6
	36" 900	BRP22-36	40963	.6
	42" 1050	BRP22-42	40964	.6
	48" 1200	BRP22-48	40965	.6
	60" 1500	BRP22-60	40966	.9
Cam Guide Assembly		BRP26	40970	.1
End Plate Assembly		BRP2	40975	1.9


 **Stock Items** (non-shaded) carried in factory inventory.

 **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available.
Request quote for price and delivery.



Flexco® BR™ Rivet Solid Plate Fasteners

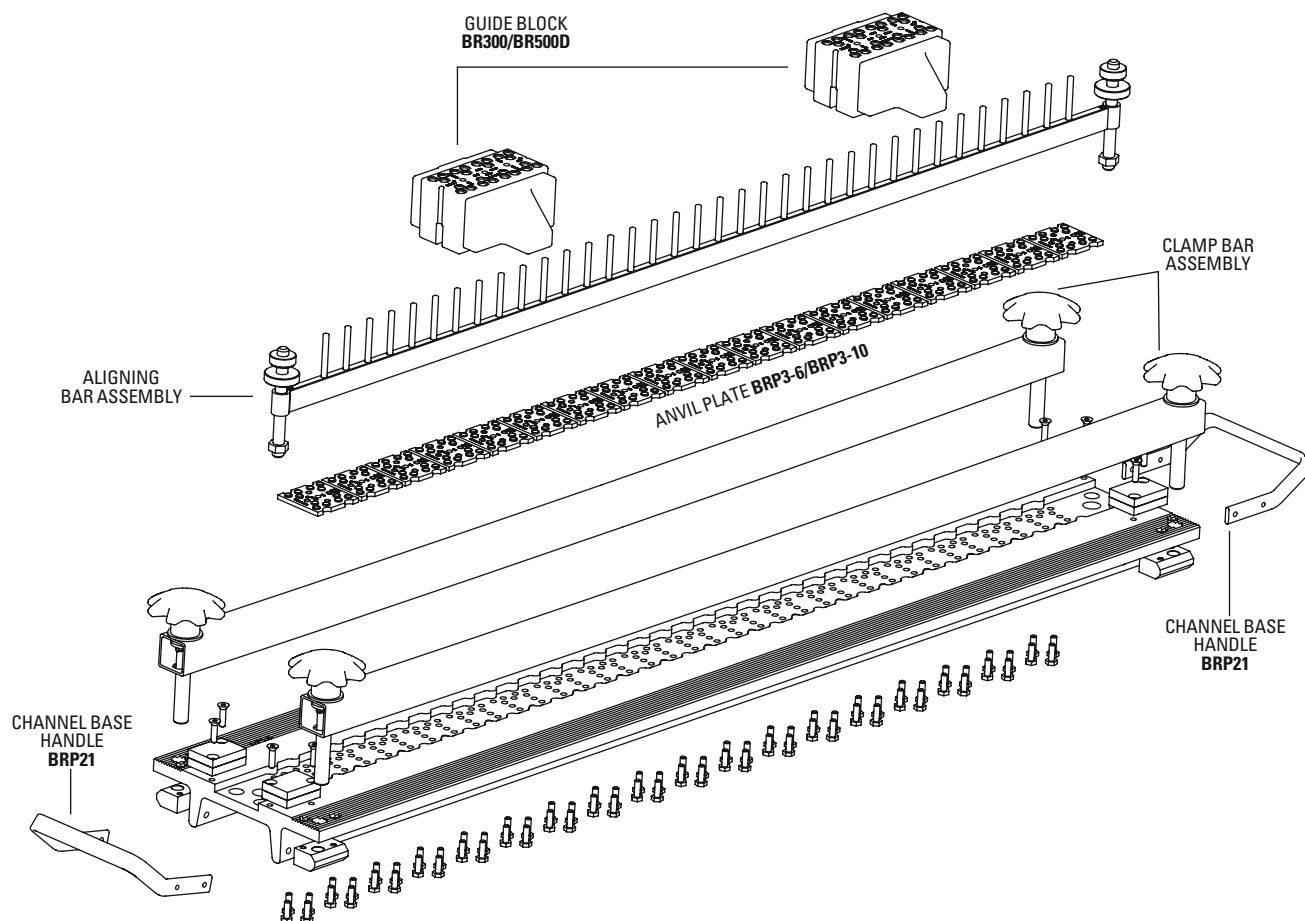


ALUMINUM MBRT6/MBRT10 APPLICATOR TOOL – REPLACEMENT PARTS

DESCRIPTION	TOOL WIDTH		BR6/BR10		
	in.	mm	ORDERING NUMBER	ITEM CODE	WT. LBS.
BR6 & BR10 Clamp Bar Assembly	30"	750	BRP6-10AL30CB	41915	7.7
	36"	900	BRP6-10AL36CB	41916	8.3
	42"	1050	BRP6-10AL42CB	41917	9.0
	48"	1200	BRP6-10AL48CB	41918	9.7
	60"	1500	BRP6-10AL60CB	41919	10.4
	72"	1800	BRP6-10AL72CB	41920	11.0
	84"	2130	BRP6-10AL84CB	41921	11.6
	96"	2430	BRP6-10AL96CB	41922	12.0
Aligning Bar Assembly			BR6		
	30"	750	BRP6AL-30AB	41906	4.7
	36"	900	BRP6AL-36AB	41907	5.0
	42"	1050	BRP6AL-42AB	41908	5.3
	48"	1200	BRP6AL-48AB	41909	5.6
	60"	1500	BRP6AL-60AB	41910	6.2
	72"	1800	BRP6AL-72AB	41911	6.6
	84"	2130	BRP6AL-84AB	41912	7.0
	96"	2430	BRP6AL-96AB	41913	7.4
			BR10		
			BRP10AL-30AB	41924	4.7
			BRP10AL-36AB	41925	5.0
			BRP10AL-42AB	41926	5.3
			BRP10AL-48AB	41927	5.6
			BRP10AL-60AB	41928	6.2
			BRP10AL-72AB	41929	6.6
			BRP10AL-84AB	41930	7.0
			BRP10AL-96AB	41931	7.4

 **Stock Items** (non-shaded) carried in factory inventory.

 **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.




How Alligator® V-Belt Fasteners Work

The Alligator® V-Belt Fastening System is designed to grip the ends of a v-belt without interfering with the sheaves (pulleys) that the belt passes around.

Staples or nails are driven through the fastener and belt and folded over. They are

then hammered tight against the bottom plate of the fastener clinching the belt between the fastener plates. There is nothing that protrudes beyond the sides of the belt that would interfere with the sheaves.

Applications	Installation Method	What You Need for Installation
• Power Transmission • Agricultural Harvesting • Manufacturing	These fasteners are inserted into a holder/tool along with the belt end. The staples/nails are driven through the splice and when complete, the entire assembly is removed from the holder. Insert the hinge and the belt is ready to be run.	• Fasteners • Hinge Pin • Staples/Nails • Holder/Tool • Rocker Pin Tools • 1 lb. Hammer
How to Specify the Correct Alligator® V-Belt Fastener	Fastener Metal Selection	Hinge Pin Selection
The fastener size is determined by the belt size that you use. Simply choose the fastener that corresponds to your belt, A312, B437, or C531.	Steel. Standard fastener material.	Rocker Pins are included with the fasteners.



Alligator® V-Belt Fasteners and V-Belt

FASTENERS

ORDERING NUMBER	ITEM CODE	SETS PER BOX	WT. LBS.
A312*	70020	10	.3
B437	70023	10	.5
BB4	70028	10	.4
C531	70030	10	1.2
D750	70034	10	2.1


*A312 Fasteners are installed with staples, all others installed with nails.

V-BELT CONVENTIONAL

LENGTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
Foot	Meter			
20'	6	AV20	70170	1.8
100'	30	AV100	70171	9.0
250'	76	AV250	70172	22.5
20'	6	BV20	70174	2.6
100'	30	BV100	70175	13.0
250'	76	BV250	70176	32.5
100'	30	CV100	70178	22.0
250'	76	CV250	70179	55.0
DOUBLE V – SOLD BY THE FOOT, 25" INCREMENTS				
25' Min.		BB	70015	.2

COMPLETE V-BELT KIT CONTAINS:

100' Belting
10 Fasteners
1 Holder Tool
1 Rocker Pin Tool
– Required amount of nails (or staples)

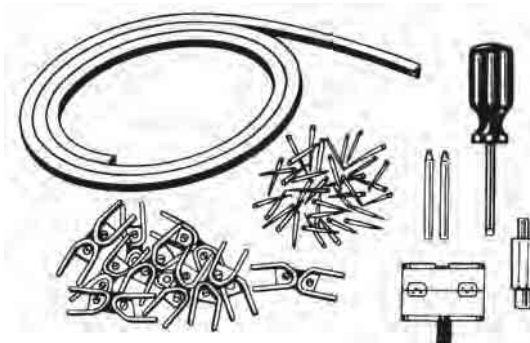

INSTALLATION TOOLS & PARTS

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Piercing Tool	B43760	70045	1.4
	C62560	70046	2.5
	D75060	70047	3.5
V-Belt Cutter	C62520	70050	2.0
Cutter Blade Only	C62523	70051	.3
Tightener	B43750	70056	.9
	C53150	70057	2.1
	D75050	70058	4.5
Rocker Pin Tool	B43740	70060	.1
	C62540	70061	.1
Holder	A31255	70064	.1
	B43755	70065	.2
	BB455	70066	.2
	C53155	70067	.3

SPARE PARTS

FOR FASTENER NUMBER	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
A312	Staples–Pkg. of 25	A31274	70110	.1
Nails –	Steel–Pkg. of 100	B43774	70111	.2
	Monel–Pkg. of 25	B43774M	70112	.1
	Steel–Pkg. of 100	C53174	70113	.3
	Steel–Pkg. of 100	D75074	70114	.4

 **Stock Items** (non-shaded) carried in factory inventory.


 **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.

Heavy-Duty Belt Maintenance Tools

FOUR LB. HAMMER

ORDERING NUMBER	ITEM CODE	WT. LBS.
4FH	30435	5.3
6FH	30375	7.3




FLEXCO® SILICONE LUBRICANT

ORDERING NUMBER	ITEM CODE	PKG. QTY.	WT. LBS.
SL5-1	30932	1	1.4




FLEXCO® BELT IDENTIFICATION TOOL

ORDERING NUMBER	ITEM CODE	WT. LBS.
BT-1	31075	.06



BELT NIPPER

ORDERING NUMBER	ITEM CODE	WT. LBS.
BN-1	50003	.8



FLEXCO® BELT GROOVER (7/16" WIDE GROOVE PATH)

ORDERING NUMBER	ITEM CODE	WT. LBS.
FBG1	31978	1.8
EXTRA BLADES		
HSP3	31980	.1



ROUTER COUNTERSINKING TOOLS

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Template Guide	RTG-2	30890	.08
Router Templet	FRT-1	30875	.7
Router Bit	RT-5/8	30877	.2

FLEXCO® BELT GRIPS


GRIPS BELTS UP TO 5/8" (16 mm) SOLD BY THE PAIR

ORDERING NUMBER	ITEM CODE	WT. LBS.
22	30882	2.5






Heavy-Duty Belt Maintenance Tools

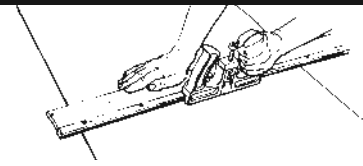

300 SERIES STRAIGHT CUTTER

DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Cutter Complete	12"	300	300312	30900	14.2
	18"	450	300318	30901	15.6
	24"	600	300324	30902	17.4
	30"	750	300330	30903	19.1
	36"	900	300336	30904	20.0
	42"	1050	300342	30905	26.1
	48"	1200	300348	30906	27.9
	60"	1500	300360	30907	32.8
Cutter Base Only	30"	750	330	30937	10.8
	36"	900	336	30938	12.3
	42"	1050	342	30939	14.0
	48"	1200	348	30940	15.6
	60"	1500	360	30941	18.9
"E" Base Only			324E	30961	9.0
			330E	30962	10.8
			336E	30963	12.4
			348E	30964	15.8
			360E	30965	18.9
Connecting Bar			30027	30910	4.6
Cutter Head Only			300	30908	2.4
Cutter Blade			30023	30909	.2
for belts up to 1 1/8" thick					
Cutter Blade - Long			30023L	30913	.2
for belts up to 1 1/16" thick					
Extra Nails (90/Package)			8D	30437	1.0

FOR CURVED BELT CUTTER, SEE PAGE 49 BOLT HINGED FASTENER SECTION.

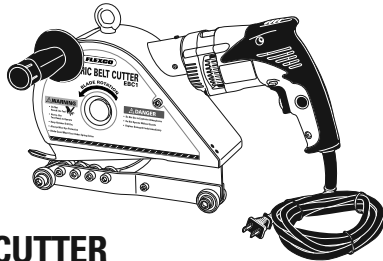


ELECTRIC BELT CUTTER

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Cutter Complete	EBC1	30001	19.0
Cutter Complete	EBC2	30002	29.0
Cutter Complete-220V	EBC1-220	30011	19.0
Cutter Complete-220V	EBC2-220	30012	29.0
Spare Parts List			
Replacement blade for EBC1	EBC1-B	30003	2.0
Replacement blade for EBC2	EBC2-B	30004	2.8
Replacement electric hammer drill for EBC1	EBC1-DR	30005	7.5
Replacement electric hammer drill for EBC2	EBC2-DR	30006	12.1
Replacement eye bolt for EBC1 & EBC2	EBC-EB	30007	.9
Replacement handle for EBC1 & EBC2	EBC-H	30008	.4

Cutting Capacity-Electric Belt Cutter

BELT TYPE	EBC1		EBC2	
	IMPERIAL	METRIC	IMPERIAL	METRIC
Rubber	Up to 1"	Up to 25 mm	Up to 2"	Up to 50 mm
PVC	Up to 360 PIW	Up to 630 EP	Up to 1140 PIW	Up to 2000 EP

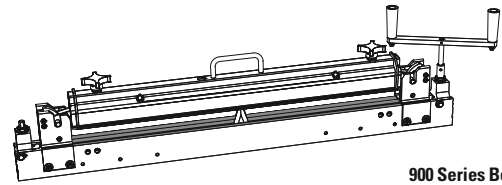

900 Series Belt Cutter


Aluminum Content-900 Series

ALUMINUM ALLOY TYPE	PERCENT	
	Mg - Magnesium	Ti -Titanium
5356	5.5	0.2
6005	0.6	0.1
6061	1.0	0.0
7075	2.5	0.0

900 SERIES* BELT CUTTER

DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Cutter Complete for belts up to 1.5" (38 mm)	24"	600	900924	04200	32.0
	36"	900	900936	04143	39.0
	48"	1200	900948	04144	45.0
	60"	1500	900960	04145	53.0
	72"	1800	900972	04146	61.0
	84"	2130	900984	04147	69.0
* Patent Pending					
Replacement Blade Kit			900CBK	04149	0.15
Drive Handle Assembly				04140	2.0

* Patent pending

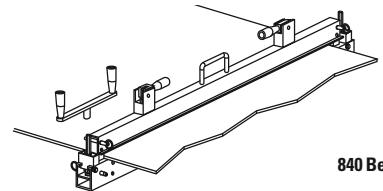

840 Belt Cutter

Aluminum Content-840 Series

ALUMINUM ALLOY TYPE	PERCENT	
	Mg - Magnesium	Ti -Titanium
6061	1.00%	0%

840 SERIES ALUMINUM BELT CUTTER

(REPLACES THE 820 SERIES BELT CUTTER.)

DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Cutter Complete for belts up to 3/8" - 1" thick	36"	900	840836	32267	25.0
	48"	1200	840848	32268	31.0
	60"	1500	840860	32269	37.0
	72"	1800	840872	32270	42.0
	84"	2130	840884	32271	48.0
Drive Handle Assembly			820/840WA	32272	2.0
Extra Blade (with screw) 1" - 25mm			820/840-ICB	32273	0.5
Optional Squaring Device			840SD	32274	2.0

OTHER REPLACEMENT CUTTER BLADES

FOR CUTTER MODEL	ORDERING NUMBER	ITEM CODE	WT. LBS.
B8	B823	30921	0.1
BC350	31071	31071	1.0

Heavy-Duty Belt Maintenance Tools



FAR-PUL® HD® BELT CLAMPS


Load Capacity up to 3 tons (2.7 metric tons) when used with two 1-1/2 ton (1.4 metric ton) come-a-longs.

DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Belt Clamp Complete includes: 4 Belt Clamp Bars and 4 Belt Clamp Scissors	Up to 30"	Up to 750	LSHD30	30393	79.0
	Up to 36"	Up to 900	LSHD36	30394	87.0
	Up to 42"	Up to 1050	LSHD42	30395	91.0
	Up to 48"	Up to 1200	LSHD48	30396	98.0
	Up to 54"	Up to 1350	LSHD54	30397	103.0
	Up to 60"	Up to 1500	LSHD60	30398	110.0
	Up to 72"	Up to 1800	LSHD72	30399	121.0
30" Belt Clamp Bar Set*	Up to 30"	Up to 750	LSHDB30-2	30418	20.0
36" Belt Clamp Bar Set*	Up to 36"	Up to 900	LSHDB36-2	30414	23.0
42" Belt Clamp Bar Set*	Up to 42"	Up to 1050	LSHDB42-2	30421	26.0
48" Belt Clamp Bar Set*	Up to 48"	Up to 1200	LSHDB48-2	30423	30.0
54" Belt Clamp Bar Set*	Up to 54"	Up to 1350	LSHDB54-2	30424	33.0
60" Belt Clamp Bar Set*	Up to 60"	Up to 1500	LSHDB60-2	30430	36.0
72" Belt Clamp Bar Set*	Up to 72"	Up to 1800	LSHDB72-2	30408	40.0
Steel Belt Clamp Scissor - Each			LSHDS	30392	10.5
Belt Locator Pin - includes Washer and Locking Nut			LSHDLP	30400	.15
Retaining Pin Kit			LSHD-RPK	30390	2.0

*Includes 2 Bars Per Set

Aluminum Content-Far-Pul® HD®

ALUMINUM ALLOY TYPE	PERCENT	
	Mg - Magnesium	Ti - Titanium
6061	1.00%	0%

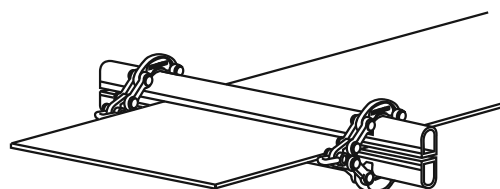


Far-Pul® HD® Belt Clamps

FLEXCO® FSK™ BELT SKIVER

Width of Skive 2½" (64mm)

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Skiver Complete with Standard Blade	FSK-2	32051	20.7
Sharpening Stone		31987	0.5
STK Tool Box		50009	5.4
REPLACEMENT PARTS			
Skiver Blade-Standard	FSK-1B	31996	0.3
Skiver Blade-High Wear	FSK-1BA	31999	0.3
Skiver Ratchet Assembly	FSK-1R	31991	1.8
Skiver Chain	FSK-1C	31992	0.4
Skiver Sprocket	FSK-1S	31993	0.2
Skiver Fence Assembly	FSK-2F	32056	1.1
Replacement Front Drive Roller Assembly	FSK2-FDRA	32052	0.6



FSK™ Belt Skiver

FLEX-LIFTER™ CONVEYOR BELT LIFTER

DESCRIPTION	BELT WIDTH RANGE		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Medium Flex-Lifter	36-60	900-1500	FL-M	76469	60.0
Large Flex-Lifter	48-72	1200-1800	FL-L	76470	74.0
Extension Leg - Medium			FLEL-M	76472	3.1
Extension Leg - Large			FLEL-L	76473	3.7
Extension Leg Pin (with lanyard)			FLELP	76474	0.1


Safe Lifting Capacity

Height		Max. Weight	
in.	mm	lbs.	kg.
0-1	0-25	500	225
1-2	25-50	1000	450
2-3	50-75	1500	675
3-4	75-100	2000	900
4-5	100-125	2500	1150
5-6	125-150	3000	1350
6-7	150-175	3500	1600
>7	>175	4000	1800

Aluminum Content-Flex-Lifter™

(for reference only)

ALUMINUM ALLOY TYPE	PERCENT	
	Mg Magnesium	Ti Titanium
4043	0.05	0.2
5356	5.5	0.2
6005	0.6	0.1
6061	1	
6063	0.7	
7075	2.5	

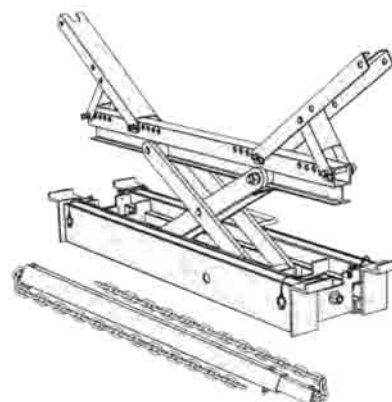

Flex-Lifter

Stock Items (non-shaded) carried in factory inventory.

Made To Order Items (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.

Belt Conveyor Products

Belt Positioner™

BELT POSITIONERS WITH EXALON ROLLERS*

SIZE	BELT WIDTH (Min-Max)		POSITIONER WIDTH (Min-Max)		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	in.	mm			
Small	18-24	450-600	24-34	600-850	RBP1E-S	73140	60.5
Medium	30-48	750-1200	34-56	850-1400	RBP1E-M	73142	73.5
Large	54-72	1350-1800	56-83	1400-2075	RBP1E-L	73144	94.0
Extra Large	72-96	1800-2400	72-120	1800-3000	RBP1E-XL	73146	182.0

*Positioners come standard with Exalon rollers. Use next larger size for belt widths between ranges.

NOTE: Idler Rollers on sizes S, M and L are 5" (125mm) diameter and rated CEMA D. Idler Rollers on the XL size are 6" (150mm) diameter and rated CEMA E.

Lead time: 1 working day

BELT POSITIONERS WITH STEEL ROLLERS

SIZE	BELT WIDTH (Min-Max)		POSITIONER WIDTH (Min-Max)		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm	in.	mm			
Small	18-24	450-600	24-34	600-850	RBP1S-S	74558	69.8
Medium	30-48	750-1200	34-56	850-1400	RBP1S-M	74559	84.6
Large	54-72	1350-1800	56-83	1400-2075	RBP1S-L	74560	109.5
Extra Large	72-96	1800-2400	72-120	1800-3000	RBP1S-XL	74561	199.6

Lead time: 1 working day

REPLACEMENT ROLLERS

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Small Exalon Roller	RBPER-S	73169	7.9
Medium Exalon Roller	RBPER-M	73170	11.0
Large Exalon Roller	RBPER-L	73171	15.5
Extra Large Exalon Roller	RBPER-XL	73172	27.8
Small Steel Roller	RBPSR-S	74562	12.2
Medium Steel Roller	RBPSR-M	74563	16.5
Large Steel Roller	RBPSR-L	74564	23.2
Extra Large Steel Roller	RBPSR-XL	74565	36.6
Roller Retainer Kit *	RBPRET	73163	0.5

Positioners come standard with Exalon rollers.

Idler rollers on sizes S, M and L are 5" (125mm) diameter and rated CEMA D.

Idler rollers on the XL size are 6" (150mm) diameter and rated CEMA E.

*Roller Retainer Kit not required for XL rollers (SDX style). Lead time: 1 working day

Product Notes:

- The Positioner should be centered between two standard return rollers. For general applications--standard belts up to 72" (1800mm): position the unit no closer than 3' (.9M) to a return roller and no farther than 6' (1.8M).
- Works on the return side of the conveyor using simple angled rollers mounted in a fixed position to quickly and continuously funnel the belt into the correct path.
- A "quick fix" solution for belts that consistently wander to one side.
- Typically installed before the tail pulley to keep the belt centered at the critical loading point. Center loading is the key to solving many top side tracking problems.
- Idler rollers make smooth contact with the return belt's bottom cover, eliminating excessive wear and damage to the belt's edges.
- Has no pivoting mechanism to freeze up and cause the unit to stop working.
- Once installed, no further adjustment is required.



ROLLER DIMENSIONS

SIZE	LENGTH		DIAMETER	
	in.	mm	in.	mm
Small	9	225	5	125
Medium	13	325	5	125
Large	19	475	5	125
Extra Large	21	525	6	150

Product Notes:

- Optimal location: no closer than 3' (.9M) and no further than 6' (1.8M) from a return roller.
- Belt Positioners come standard with Exalon rollers.
- All rollers are "sealed for life". No regreasing maintenance is required.
- MSHA approved.

Belt Conveyor Products

V-Plow

V-PLOW*

DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Extra Small	18-24"	450-600	CBV-XS	73131	53.0
Small	30-36"	750-900	CBV-S	73132	65.0
Medium	42-48"	1050-1200	CBV-M	73133	74.0
Large	54-60"	1350-1500	CBV-L	73134	84.0
72"	72"	1800	CBV-72	74389	150.0
84"	84"	2100	CBV-84	74390	175.0
96"	96"	2400	CBV-96	74391	200.0

*Use next larger size for belt widths between ranges.

Lead time: 1 working day



REPLACEMENT BLADE KITS*

DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Extra Small	18-24"	450-600	VBK-XS	73190	4.5
Small	30-36"	750-900	VBK-S	73191	6.0
Medium	42-48"	1050-1200	VBK-M	73192	7.5
Large	54-60"	1350-1500	VBK-L	73193	9.0
72"	72"	1800	VBK-72	74457	13.0
84"	84"	2100	VBK-84	74458	15.0
96"	96"	2400	VBK-96	74459	17.0

*Kit includes blades and replacement blade bolts.

Lead time: 1 working day



OPTIONAL URETHANE BLADE KITS*

Typically provides 3 to 5 times longer wear life.

DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Extra Small	18-24"	450-600	VUBK-XS	75570	5.4
Small	30-36"	750-900	VUBK-S	75571	8.0
Medium	42-48"	1050-1200	VUBK-M	75572	10.5
Large	54-60"	1350-1500	VUBK-L	75573	13.0
72"	72"	1800	VUBK-72	75574	15.9
84"	84"	2100	VUBK-84	75575	18.5
96"	96"	2400	VUBK-96	75576	21.0

*Kit includes blades and replacement blade bolts.

Lead time: 1 working day

Product Notes:

- Exclusive blade design - 20° slant on leading edge spirals debris off the belt.
- Self-adjusting blade - the blade floats on the belt and self-adjusts as it wears.
- Unique blade adjuster - turnbuckle-type adjuster allows the blade to be accurately positioned to the belt.
- Easy to install - comes fully assembled and can be placed right into position on the conveyor.

 **Made To Order Items** (shaded) allow 10 working days for production.

Belt Conveyor Products

Flex-Lok™ Skirt Clamps


FLEX-LOK™ SKIRT CLAMP

One Skirt Clamp includes one 6' (1.8M) clamp runner, 4 clamp plates, 4 clamp pins and one 6' (1.8M) restraining bar. Skirt board and rubber not included.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Skirt Clamp	FLSC-I	71052	31.1
REPLACEMENT PARTS			
Clamp Runner - 6 ft. (1.8M)	FL-RPI	71058	7.3
Clamp Plate	FL-PC-I	71057	2.1
Clamp Pin	FL-CP-I	71141	1.9
Restraining Bar - 6 ft. (1.8M)	FL-RBI	71060	11.3

NOTE: Skirt Rubber Thickness Range: 5/16" to 1" (8 - 25mm)

Lead time: 1 working day

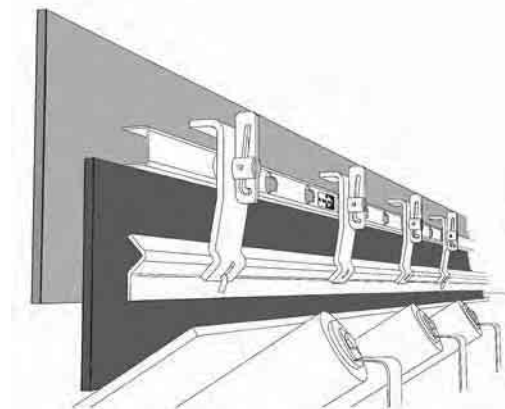

STANDARD


MINI FLEX-LOK™ SKIRT CLAMP

One Mini Skirt Clamp includes one 6' (1.8M) clamp runner, 3 mini clamp plates, 3 clamp pins and one 6' (1.8M) restraining bar. Skirt board and rubber not included.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Mini Skirt Clamp	FLSCM-I	71055	27.6
REPLACEMENT PARTS			
Clamp Runner - 6 ft. (1.8M)	FL-RPI	71058	7.3
Clamp Plate	FLM-PC	71140	2.1
Clamp Pin	FL-CP-I	71141	1.9
Restraining Bar - 6 ft. (1.8M)	FL-RBI	71060	11.3

NOTE: Skirt Rubber Thickness Range: 5/16" to 5/8" (8 - 16mm)

Lead time: 1 working day

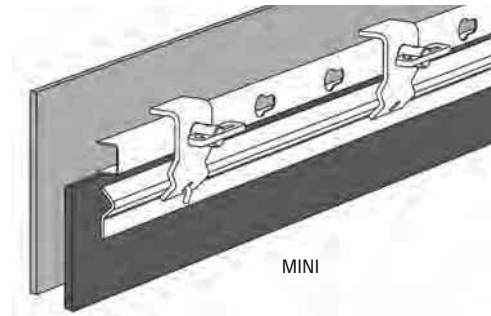

MINI


STAINLESS STEEL* FLEX-LOK™ SKIRT CLAMP

One SS Clamp includes one 6' (1.8M) clamp runner, 4 clamp plates, 4 clamp pins and one 6' (1.8M) restraining bar.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
SS Skirt Clamp	FLSC-ISS	75778	25.0
REPLACEMENT PARTS			
SS Clamp Plate	FL-PC-ISS	71168	1.9
Clamp Pin	FLCP-ISS	71164	1.9

*316SS (all parts)

Lead time: 1 working day

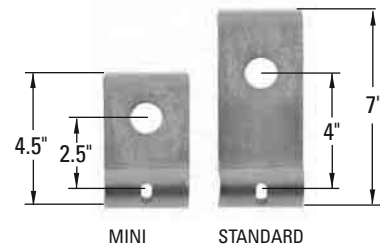

MINI STANDARD

Two models are available to fit your conveyor requirements

SERVICE MAINTENANCE

- Inspection - Periodically inspect the clearance between the skirt rubber and the belt. If this gap is more than 1/4" (6mm) or if excessive fines are escaping, readjust the skirt rubber.
- Adjustment - Unlock the wedges on the clamp pins and slide the skirt rubber down to the belt. Relock the clamp pins.

TROUBLESHOOTING

Problem: Skirt rubber slips out of skirt clamp.

Solution:

1. Check to insure wedges in clamp pins are locked.
2. Check skirt rubber position. Skirt rubber must not fold and lie on top of belt.



Anti-Vibration Clamp Pins
(Standard)



Tatch-A-Cleat® General Cleat Information

Cleat patterns

When choosing cleat installation patterns, you should give major consideration to the type of return support which is available or feasible.

Where conveyor pulley center distances are 15 feet or less, it is often possible to omit return rolls safely.

Where the curved or chevron pattern is used with standard return rolls, cleats should be

arranged so that they provide a set of continuous contacts between cleats and rolls. On drives using pulleys less than 6" in diameter, curved or chevron patterns should not be used.

The ends of cleats mounted in a curved pattern should be tapered to lead smoothly onto return rolls.

Suggested minimum cleat height for various sized materials and degrees of incline

This chart assumes that material being conveyed has a 30° natural angle of repose. For rounded or free-flowing materials with a natural angle of repose of less than 30°, use the cleat corresponding to the next higher material size. (For example, if your material is 4" high, with a natural angle of repose of less than 30°, and your belt incline is 40°, you would use a 3" cleat — that is, the cleat size corresponding to 5" material.

		Cleat Height				
Size of Material		8"	6"	6"	6"	6"
	7"	6"	6"	6"	6"	6"
	6"	4"	4"	6"	6"	6"
	5"	3"	3"	4"	6"	6"
	4"	2"	2"	3"	4"	4"
	3"	1 ½"	1 ½"	2"	3"	3"
	2"	1"	1"	1 ½"	2"	2"
	1"	5/8"	5/8"	1"	1 ½"	1 ½"
	½"	5/8"	5/8"	5/8"	1"	1"
		30°	40°	50°	60°	
Belt Incline						

Suggested cleat spacing

This chart assumes that material being conveyed has a 20° dynamic angle of repose (30° natural angle of repose) and that cleats are installed at a right angle to the belt edge. For more free-flowing material, use slightly closer cleat spacing.

		Cleat Spacing				
Cleat Height		6"	35"	28"	21"	15 ¾"
	4"	23"	18 ½"	13 ½"	10 ½"	10 ½"
	3"	17"	13 ½"	10"	8"	8"
	2"	12"	8 ½"	6 ¼"	5"	5"
	1 ½"	8 ½"	6"	5"	4"	4"
	1"	5 ½"	4 ¼"	2 ¾"	2 ½"	2 ½"
	5/8"	4"	2 ¾"	2"	1 ¾"	1 ¾"
		30°	40°	50°	60°	
Belt Incline						

Type	Cleat Pattern	Return Rolls	Recommended
IN TROUGH		SPLIT ROLLS 	Where Cleats are needed only to lock material in place on the conveyor.
STAGGERED		SQUIRREL CAGE 	Where drain-off of liquids presented special problems.
ACROSS BELT WIDTH		SELF-CLEANING 	Where incline is steep and/or material has high flowability — as with large, round or uniformly sized material.
CURVED		STANDARD RETURN ROLLS 	Where increased load capacity is required with a given belt width, trough, and incline.
SPLIT		RUBBER-DISC 	Where drain-off is a problem, and rubber disc-type rolls are available.
CHEVRON		STANDARD RETURN ROLLS 	Where drain-off is a problem, and standard solid return rolls are used.

Tatch-A-Cleat® Mechanical Cleats

MODEL "L" CLEATS

10 CLEATS/CARTON – Min. Pulley 2" (50 mm)

ORDERING NUMBER	ITEM CODE	WT. LBS.
BLACK – PLATED FASTENER		
L5/8-B	99500	7.3
L1-B	99504	9.3
L1-1/2-B	99508	11.2
L2-B	99512	14.0
L3-B	99516	18.3
BLACK – 302 STAINLESS FASTENER		
L5/8-BS	99501	7.3
L1-BS	99505	9.3
L1-1/2-BS	99509	11.2
L2-BS	99513	14.0
L3-BS	99517	18.3
WHITE – PLATED FASTENER		
L5/8-W	99502	7.3
L1-W	99506	9.3
L1-1/2-W	99510	12.3
L2-W	99514	14.5
L3-W	99518	19.3
WHITE – 302 STAINLESS FASTENER		
L5/8-WS	99503	7.3
L1-WS	99507	9.3
L1-1/2-WS	99511	12.3
L2-WS	99515	14.5
L3-WS	99519	19.3

EXTRA FASTENER SETS

123/BAG #10-24 Machine Screws and Washers

ORDERING NUMBER	ITEM CODE	WT. LBS.
PLATED		
L1/2-F	99570	1.0
L5/8-F	99522	1.0
L3/4-F	99520	1.3
L1-F	99521	1.3
STAINLESS		
L1/2-FS	99571	1.0
L5/8-FS	99525	1.0
L3/4-FS	99523	1.3

MODEL "HD" CLEATS


ORDERING NUMBER	ITEM CODE	WT. LBS.	CLEATS/CARTON	MIN. PULLEY	
				in.	mm
WITH PLATED FASTENER					
HD1	99531	11.5	10	1	25
HD2	99565	9.5	5	2	50
WITH STAINLESS FASTENER					
HD1S	99648	11.8	10	1	25

NOTE: HD2 Cleats may be purchased in bulk quantities. Contact Customer Service for details.

EXTRA FASTENER SETS—TYPE AB

123/BAG

ORDERING NUMBER	ITEM CODE	WT. LBS.
PLATED		
HD1-F	99535	2.5
HD1-1/4-F	99536	2.8
STAINLESS		
HD1-FS	99529	2.6




NOTE: Cleats are 24" long.

1/2" screws are furnished "standard" and can be used on belts up to 5/16" (8 mm) thick.

Inserts are on 2" (50mm) centers.

For belts 5/16" – 7/16" (8 – 11 mm) use a 5/8" screw.

For belts over 7/16" (11 mm) use a 3/4" screw.



NOTE: Cleats are 48" long. Ordering numbers followed by the letter T indicate cleat fasteners furnished with flat top nut (ECFT). Standard fasteners include hex nuts. (ECF).

ECONO-CLEAT®

5 CLEATS/CARTON

ORDERING NUMBER	ITEM CODE	WT. LBS.	MIN. PULLEY	
			in.	mm
ECONO-CLEAT w/FASTENERS & HEX NUTS (ECF, EC4F, EC6F)				
EC1-1/4	99576	12.5	3	75
EC2	99578	15.5	3	75
EC3	99580	22.0	3	75
EC4	99582	33.0	4	100
EC6*	99586	28.3	6	150
ECONO-CLEAT w/FASTENERS & FLAT TOP NUTS (ECFT, EC4FT)				
EC1-1/4-T	99577	12.5	3	75
EC2-T	99579	15.5	3	75
EC3-T	99581	22.0	3	75
EC4-T	99583	33.0	4	100

*Two 48" Cleats/Carton

ECONOMY CARTON

12 FT. LENGTHS w/NO FASTENERS - 3 FASTENER SETS

PER FOOT REQUIRED

ORDERING NUMBER	ITEM CODE	WT. LBS.	FEET/ CTN.	MIN. PULLEY	
				in.	mm
EC1-1/4-C	99597	119.0	240	3	75
EC2-C	99598	125.0	180	3	75
EC3-C	99599	123.0	120	3	75
EC4-C	99601	121.0	72	4	100
EC6-C	99600	126.0	36	6	150
12 FT. LENGTHS IN PVC					
EC1-1/4-CPVC	99959	107.0	168	3	75
EC2-CPVC	99960	116.0	120	3	75
EC3-CPVC	99961	120.0	84	3	75



NOTE: 1" and 2" Cleats – 24" long
Model HD Cleats are furnished with Plated 14 X 1 Type AB Fasteners. Specify 1-1/4" screws for belts over 7/16" thick.

EXTRA FASTENER SETS

61/BAG

ORDERING NUMBER	ITEM CODE	WT. LBS.	SIZE
FASTENERS FOR 1-1/4", 2" & 3" CLEATS			
ECF	99589	2.8	1/4" x 1-1/4"
ECFS	99593	2.9	
ECFT	99590	2.3	
FASTENERS FOR 4" CLEATS			
EC4F	99591	3.3	1-1/4" x 1-3/4"
EC4FT	99592	2.3	
FASTENERS FOR 6" CLEATS			
EC6F*	99594	2.0	1-1/4" x 2"

*33/Bag

Tatch-A-Cleat® Mechanical Cleats

TATCH-A-LUG®

Min. Pulley 2" (50 mm)

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
(25 LUGS/CARTON)	LG1-1/2	99541	1.8
	LG2	99543	2.0
(26 EACH)			
Extra Fastener Sets – Plated	LG3/4-F	99546	.3
– Stainless	LG3/4-FS	99547	.3
Economy Carton (100 LUGS)	LG1-1/2-C	99542	6.7
	LG2-C	99544	7.1



TATCH-A-PEG®

Min. Pulley 2" (50 mm)

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
(100 PEGS/CARTON)	PG2	99539	4.3
	PG3	99537	6.9
Extra Fastener Sets – Plated	P1/2-F	99548	.8
(100 / bag)	P3/4-F	99538	1.0



EXTRA WASHERS

FOR CLEAT:	ORDERING NUMBER	ITEM CODE	WT. LBS.	DIA.
Econo-Cleat®	CW25/100	99690	.1	1/4"
Tatch-A-Lug®, Model "L"	CW1024	99626	.1	13/64"
Tatch-A-Peg®				
BULK WASHERS				
Tatch-A-Lug®, Model "L"	CWS1024	99627	1.0	13/64"
Tatch-A-Peg®				


TATCH-A-GUIDE®

DESCRIPTION	LENGTH		ORDERING NUMBER	ITEM CODE	WT. LBS.	MIN. PULLEY	
	in.	mm				in.	mm
Plated (10/CTN.)	8"	200	A10	99551	1.0	4	100
	8"	200	B10	99553	1.3	6	150
	9 1/4"	235	C10	99555	3.3	8	200
Stainless	8"	200	A10S	99552	1.0	4	100
	8"	200	B10S	99554	1.3	6	150
	9 1/4"	235	C10S	99556	3.3	8	200
Extra Fasteners Sets (31/BAG)							
Plated	– Size A		G1/2-F	99560	.1		
	– Size B		G5/8-F	99566	.1		
	– Size C		G3/4-F	99572	.3		
Stainless	– Size A		G1/2-FS	99563	.1		
	– Size B		G5/8-FS	99569	.1		
	– Size C		G3/4-FS	99573	.3		



INSTALLATION TOOLS

DESCRIPTION	ORDERING NUMBER	FOR CLEAT TYPE:	DIA.	ITEM CODE	WT. LBS.
Flexco® Belt Punches	P1P	Model L, Econo-Cleat®, Tatch-A-Lug®, Tatch-A-Peg®, & Tatch-A-Guide®	1/4"	30460	.1
	P3P	Model HD	3/8"	30462	.3
Flexco® Power Punches	HP1	Model L, Econo-Cleat®, Tatch-A-Lug®, Tatch-A-Peg®, & Tatch-A-Guide®	1/4"	30463	.2
	HP3	Model HD	3/8"	30465	.2
Flexco® Bolt Breaker (Two per Package)	110			30474	1.2
Quick Change Chuck	5552			30481	0.4
Alligator® Belt Grinder	RB-1			30867	0.7

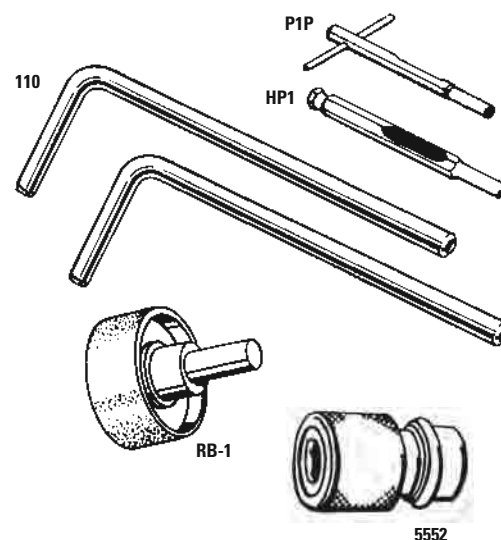

 **Stock Items** (non-shaded) carried in factory inventory.

 **Made To Order Items** (shaded) allow one week for production. In most cases, the next standard stock item can be adapted to meet your requirements.

Non-Listed Items are available. Request quote for price and delivery.

Tatch-A-Cleat® Rubber Bondable

RUBBER BONDABLE


T CLEATS

BUFFED - STANDARD PACK 10' LENGTHS - NITRILE 60 DURO - 1500 lb. TENSILE

WHITE		BLACK		WT./FT.	MIN. ORDER QTY.	HEIGHT	BASE WIDTH	THICKNESS	MIN. PULLEY DIAMETER
ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE						
T-3/4WNIB	99966	T-3/4BNIB	99982	.40	100'	3/4"	2 1/8"	.250"	6"
T-1WNIB	99967	T-1BNIB	99983	.45	100'	1"	2 1/8"	.250"	6"
T-1-1/2WNIB	99968	T-1-1/2BNIB	99984	.57	100'	1 1/2"	2 1/8"	.250"	6"
T-2WNIB	99969	T-2BNIB	99985	.62	100'	2"	2 1/8"	.250"	6"
		T-3BNIB	99987	1.20	100'	3"	2 1/8"	.375"	6"

UNBUFFED - STANDARD PACK 10' LENGTHS - NITRILE 60 DURO - 1500 lb. TENSILE

T-1/2WNI	99818			.27	100'	1/2"	1"	.250"	4"
T-3/4WNI	99800			.40	100'	3/4"	2 1/8"	.250"	6"



T CLEAT

BONDABLE CLEAT – TEMPERATURE SERVICE RANGE

FOR CLEAT TYPE:	TEMPERATURE RANGE
RUBBER BONDABLE	
T-Cleat, Scoop Cleats	-40°F to +180°F
V-Guides	-40°F to +210°F
PVC BONDABLE	
T-Cleat, Scoop Cleats, V-Guides	-20°F to +150°F

Made To Order Items Allow 6-8 weeks for delivery.
Minimum order may apply.

NOTE: One reel or carton minimum per size and color.
Non Listed Items are available.
Request quote for price and delivery.

NOTE: Customized Profiles and Formulations can be quoted.

NOTE: Allow for greater pulley diameters if system has reverse bends.

Tatch-A-Cleat® Rubber Bondable

RUBBER BONDABLE

V-GUIDE BUFFED


STANDARD PACK 100' LENGTHS - NEOPRENE 60 DURO - 1500 lb. TENSILE

WHITE		BLACK		WT./FT.	QUANTITY CTN./REEL	SIZE	W1	W2	HEIGHT	MIN. PULLEY DIAMETER
ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE							
AVGWNEB	99832	AVGBNEB	99996	.09	100'	A	1/2"	5/16"	5/16"	4"
		BVGBNEB	99844	.15	100'	B	5/8"	7/16"	7/16"	6"

STANDARD REEL* NEOPRENE 60 DURO - 1500 lb. TENSILE

OVGWNEB-500	99287	OVGBNEB-500	99301	.05	500'	O	3/8"	1/4"	1/4"	2"
AVGWNEB-500	99288	AVGBNEB-500	99302	.09	500'	A	1/2"	5/16"	5/16"	4"
BVGWNEB-500	99289	BVGBNEB-500	99303	.15	500'	B	5/8"	7/16"	7/16"	6"
CVGWNEB-300	99290	CVGBNEB-300	99304	.25	300'	C	7/8"	17/32"	17/32"	8"

*White V-guides shipped in 2 pieces on one reel.



V-GUIDE UNBUFFED

STANDARD PACK 100' LENGTHS - NEOPRENE 60 DURO - 1500 lb. TENSILE

WHITE		BLACK		WT./FT.	QUANTITY CTN./REEL	SIZE	W1	W2	HEIGHT	MIN. PULLEY DIAMETER
ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE							
		AVGBNE	99855	.09	100'	A	1/2"	5/16"	5/16"	4"

STANDARD REEL* NEOPRENE 60 DURO - 1500 lb. TENSILE

OVGWNE-500	99280			.05	500'	O	3/8"	1/4"	1/4"	2"
AVGWNE-500	99281	AVGBNE-500	99295	.09	500'	A	1/2"	5/16"	5/16"	4"
BVGWNE-500	99282	BVGBNE-500	99296	.15	500'	B	5/8"	7/16"	7/16"	6"
CVGWNE-300	99283	CVGBNE-300	99297	.25	300'	C	7/8"	17/32"	17/32"	8"

*White V-guides shipped in 2 pieces on one reel.

FLANGES

50' LENGTHS - NEOPRENE 45 DURO - 1200 lb. TENSILE, 600% ELONGATION - BLACK ONLY

ORDERING NUMBER	ITEM CODE	WT./FT.	QTY./CTN.	HEIGHT	BASE WIDTH	MIN. PULLEY DIA.	
						FLANGE	CLEAT
FL1BNE	99860	.24	50'	1"	3/4"	6"	4"
FL1-1/2BNE	99861	.48	50'	1 1/2"	1"	8"	5"


NOTE: One reel or carton minimum per size and color.

Non Listed Items are available.

Request quote for price and delivery.

NOTE: Customized Profiles and Formulations can be quoted.

NOTE: Allow for greater pulley diameters if system has reverse bends.

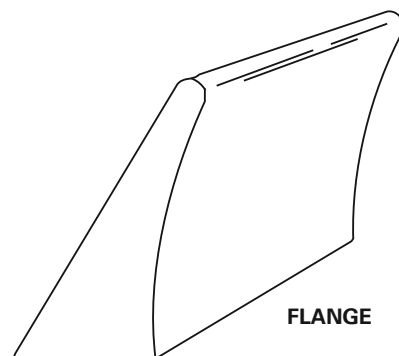

Tatch-A-Cleat® PVC Bondable

PVC BONDABLE

T CLEATS

STANDARD PACK 10' LENGTHS - 70 DURO - 1750 lb. TENSILE

WHITE		BLACK		WT./CTN.	QTY./CTN.	HEIGHT	BASE WIDTH	THICKNESS	MIN. PULLEY DIAMETER
ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE						
T1/2WP-100	99112	T1/2BP-100	99126	27.0	100'	1/2"	1"	.220"	2 1/2"
T3/4WP-100	99113	T3/4BP-100	99127	40.0	100'	3/4"	1"	.220"	2 1/2"
T1WP-100	99114	T1BP-100	99128	45.0	100'	1"	1 1/2"	.380"	3"
T1-1/2WP-100	99115	T1-1/2BP-100	99129	57.0	100'	1 1/2"	1 1/2"	.380"	3"
T2WP-100	99116	T2BP-100	99130	62.0	100'	2"	1 1/2"	.380"	3"
		T2-1/2BP-50	99131	45.0	50'	2 1/2"	1 1/2"	.380"	4"
T3WP-50	99118	T3BP-50	99132	49.0	50'	3"	1- 1/2"	.380"	4"

BULK PACK 10' LENGTHS - 70 DURO - 1750 lb. TENSILE

T1/2WP-500	99168	T1/2BP-500	99182	135.0	500'	1/2"	1"	.220"	2 1/2"
T3/4WP-500	99169	T3/4BP-500	99183	200.0	500'	3/4"	1"	.220"	2 1/2"
T1WP-400	99170	T1BP-400	99184	180.0	400'	1"	1 1/2"	.380"	3"
T1-1/2WP-300	99171	T1-1/2BP-300	99185	171.0	300'	1 1/2"	1 1/2"	.380"	3"
T2WP-250	99172	T2BP-250	99186	155.0	250'	2"	1 1/2"	.380"	3"
T2-1/2WP-150	99173	T2-1/2BP-150	99187	135.0	150'	2 1/2"	1 1/2"	.380"	4"
T3WP-100	99174	T3BP-100	99188	97.0	100'	3"	1 1/2"	.380"	4"
TH3WP-100	99175	TH3BP-100	99189	116.0	100'	3"	1 1/2"	.380"	5"

COIL PACK 100' LENGTHS - 70 DURO - 1750 lb. TENSILE

T1WP-600	99151	T1BP-600	99158	270.0	600'	1"	1 1/2"	.380"	3"
T1-1/2WP-400	99152	T1-1/2BP-400	99159	228.0	400'	1 1/2"	1 1/2"	.380"	3"
TH1-1/2WP-400	99153	TH1-1/2BP-400	99160	274.0	400'	1 1/2"	1 1/2"	.380"	3"
T2WP-300	99154	T2BP-300	99161	186.0	300'	2"	1 1/2"	.380"	3"
		T2-1/2BP-300	99162	270.0	300'	2 1/2"	1 1/2"	.380"	4"
T3WP-200	99156	T3BP-200	99163	194.0	200'	3"	1 1/2"	.380"	4"
TH3WP-200	99157	TH3BP-200	99164	232.0	200'	3"	1 1/2"	.380"	5"
TH4WP-100	99135	TH4BP-100	99136	125.0	100'	4"	1 1/2"	.500"	5"


SCOOP CLEATS

STANDARD PACK 10' LENGTHS - 70 DURO - 1750 lb. TENSILE

WHITE		BLACK		WT./FT.	QTY./CTN.	HEIGHT	BASE	MIN. PULLEY DIAMETER
ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE					
T2SCOOPWP-100	99141			62.0	100'	2"	1.40"	6"

BULK PACK 10' LENGTHS - 70 DURO - 1750 lb. TENSILE

T2SCOOPWP-200	99224			119.0	200'	2"	1.40"	6"
T3SCOOPWP100	99229	T3SCOOPBP-100	99230	111.1	100'	3"	1.75"	8"



NOTE: One reel or carton minimum per size and color.

Non Listed Items are available.

Request quote for price and delivery.

NOTE: Customized Profiles and Formulations can be quoted.

NOTE: Allow for greater pulley diameters if system has reverse bends.


Tatch-A-Cleat® PVC Bondable

PVC BONDABLE

V-GUIDES

STANDARD PACK 100' LENGTHS - 70 DURO - 1750 lb. TENSILE

WHITE		BLACK		WT. CTN./REEL	QUANTITY CTN./REEL	SIZE	W1	W2	HEIGHT	MIN. PULLEY DIAMETER
ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE							
OVGWP-100	99932	OVGBP-100	99936	5.0	100'	O	3/8"	1/4"	1/4"	2"
AVGWP-100	99933	AVGBP-100	99937	9.0	100'	A	1/2"	5/16"	5/16"	4"
BVGWP-100	99934	BVGBP-100	99938	15.0	100'	B	5/8"	3/8"	7/16"	6"
CVGWP-100	99935	CVGBP-100	99939	25.0	100'	C	7/8"	7/16"	17/32"	8"



STANDARD REEL 70 DURO - 1750 lb. TENSILE

OVGWP-500	99308	OVGBP-500	99322	25.0	500'	O	3/8"	1/4"	1/4"	2"
AVGWP-500	99309	AVGBP-500	99323	45.0	500'	A	1/2"	5/16"	5/16"	4"
BVGWP-500	99310	BVGBP-500	99324	75.0	500'	B	5/8"	3/8"	7/16"	6"
		CVGBP-250	99325	63.0	250'	C	7/8"	7/16"	17/32"	8"

BULK REEL 70 DURO - 1750 lb. TENSILE

OVGWP-1200	99345	OVGBP-1200	99354	60.0	1200'	O	3/8"	1/4"	1/4"	2"
AMVWP-1200	99371	AMVBP-1200	99369	95.0	1200'	MOD. A	1/2"	3/8"	1/4"	5"
AVGWP-1000	99346	AVGBP-1000	99355	90.0	1000'	A	1/2"	5/16"	5/16"	4"
BVGWP-800	99347	BVGBP-800	99356	120.0	800'	B	5/8"	5/16"	7/16"	6"
CVGWP-400	99348	CVGBP-400	99357	100.0	400'	C	7/8"	7/16"	17/32"	8"
K8VGWP-1500	99338			50.0	1500'	K	5/16"	3/16"	3/16"	

NOTCHED V-GUIDES

STANDARD PACK 100' LENGTHS - 70 DURO - 1750 lb. TENSILE

WHITE		BLACK		WT. CTN./REEL	QUANTITY CTN./REEL	SIZE	W1	W2	HEIGHT	MIN. PULLEY DIAMETER
ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE							
ONWP-100	99364	ONBP-100	99372	5.0	100'	O	3/8"	1/4"	1/4"	2"
ANWP-100	99365	ANBP-100	99373	7.0	100'	A	1/2"	5/16"	5/16"	4"
		BNBP-100	99374	11.0	100'	B	5/8"	3/8"	7/16"	6"

STANDARD REEL 70 DURO - 1750 lb. TENSILE

ONWP-500	99359	ONBP-500	99350	30.0	500'	O	3/8"	1/4"	1/4"	2"
ANWP-500	99360	ANBP-500	99351	40.0	500'	A	1/2"	5/16"	5/16"	4"
BNWP-500	99361	BNBP-500	99352	60.0	500'	B	5/8"	3/8"	7/16"	6"

BULK REEL 70 DURO - 1750 lb. TENSILE

ONWP-1200	99334	ONBP-1200	99341	71.0	1200'	O	3/8"	1/4"	1/4"	2"
ANWP-1000	99335	ANBP-1000	99342	81.0	1000'	A	1/2"	5/16"	5/16"	4"
BNWP-800	99336	BNBP-800	99343	93.0	800'	B	5/8"	3/8"	7/16"	6"
CNWP-400	99337	CNBP-400	99344	87.0	400'	C	7/8"	7/16"	17/32"	8"

NOTE: One reel or carton minimum per size and color.

Non Listed Items are available.

Request quote for price and delivery.

NOTE: Customized Profiles and Formulations can be quoted.

NOTE: Allow for greater pulley diameters if system has reverse bends.

Book Index By Ordering Number

Order Number	Page	Order Number	Page	Order Number	Page	Order Number	Page
00	29	1LLSPS12, 1LLSPHT12	11	27-12 thru 27-60	26	375XJ18NCS thru	46
00-12 thru 00-60	26	1LLSS6, 1LLSS12,	11	2-72	66	375XJ48NCS	
00H6 thru 00H60	28	1LLSPSS12		27E, 27K, 27L, etc.	29	375XJ24SC thru 375XJ48SC	46
00S	29	1LW95	22	27RH12	29	375XS-2	47
00S-12 thru 00S-60	27	1S12, 1S12NYS	11	27S-12 thru 27S-60	27	375XS-2STS	47
00SH24 thru 00SH60	28	1S-12 thru 1S-60	27	2B	8	375XS-3, 375XS-3STS	47
04140	78	1SPS6, 1SPSS6, etc.	11	2BH	67	375XSJ18NCS thru	46
1 & 7 CLIP	28	1SPS6NYS, 1SPS12NYS	11	2C, 2CMA, etc.	65	375XSJ60SSC	
1&7H6 thru 1&7H60	28	1SS6, 1SS12, etc.	11	2E, 2ES, etc.	65	3B, 3M, 3S, 3SNYS, etc.	8
1&7SH12 thru 1&7SH60	28	1VL-7	22	2G, 2GNY, etc.	7	3C	65
100	50	1XSPG12, 1XSPG12NY	10	2M, 2S	8	3G, 3GNY	7
100T-300 thru 100T-1200	39	1XSPG6, 1XSPG6NY	10	2SNYS, 2SPB	8	3HT, 3HT-WIDE	7
1-1/2-12, 1-1/2-18, etc.	66	1XSPHT6, 1XSPHT12	10	2SPG, 2SPGNY	7	400 thru 460	49
1-1/2-18-45, 1-1/2-24-45, etc.	66	1XSPS12, 1XSPS12NYS	11	2SPHT	7	400430 thru 400460	49
1-1/2C, 1-1/2CMA, etc.	65	1XSPS6, 1XSPS6NYS	11	2SPM, 2SPS, etc.	8	40988, 40990, 40991	61, 72
1-1/2E, 1-1/2EMAP, etc.	65	1XSPSS6, 1XSPSS12	11	2VP, 2VPB	65	4-1/2-3HT, etc.	7
1-1/2EP, 1-1/2ES, etc.	65	20	29	2W, 2WL, 2WS, etc.	68	4-1/2-3RHTX(45)W-4, etc.	9
110	50, 67, 85	20-14 thru 20-60	26	3	65	4-1/2G, 4-1/2GW, 4-1/2HT, etc.	7
1-12 thru 1-48	66	20380, 20381, 20387, 20397 etc.	49	300	78	4-1/2S, 4-1/2SS, etc.	8
112, 113	67	20398, 20399, 20399, etc.	49, 68	30023, 30023L, etc.	49, 78	41008	72
1-12-45 thru 1-48-45	66	20406, 20410, 20414, etc.	68	30027	78	4-2G, 4-2GNY, 4-2HT, etc.	7
125MA, 187MA	34	20E, 20S, etc.	29	300312 thru 300360	78	4-2S, 4-2SNYS	8
125-RET-50, 187-RET-50	33	20H12 thru 20H60	28	30LPSS	12	45 CLIP	28
12Lacer, 12Lacer-chain	23	20RH12, 20SRH12, etc.	29	30LSS	12	45-12 thru 45-60	26
140-12 thru 140-48	66	20S-12 thru 20S-60	27	30PSS	12	45H12 thru 45H60	28
140-24-45 thru 140-60-45	66	20SH24, 20SH30, etc.	28	30SS	12	45RH12	29
140C, 140CMA, etc.	65	2-1/2, 2-1/2C, etc.	65	31071	78	45S-12 thru 45S-48	27
140E, 140EE, etc.	65	2-1/2-20 thru 2-1/2-72	66	310-RET-50	50, 57	45SH36, 45SH48	28
140EP, 140ES, etc.	65	2-1/4-24 thru 2-1/4-72	66	31987	79	45U, 45US, etc.	29
140VP, 140VPB, etc.	65	2-1/4C, 2-1/4CMA, etc.	65	3-1G, 3-1GNY, 3-1HT, etc.	7	4APSS	12
15	29	2-1/4E, 2-1/4EE, etc.	65	3-1S, 3-1SS	8	4B, 4M	8
15 & 20 CLIP	28	2-12 thru 2-72	66	330, 342, etc.	78	4FH	60, 72, 77
150T-300 thru 150T-1200	39	22	77	324E, 330E, 336E, etc.	78	4G, 4GNY, 4HT, etc.	7
15-12 thru 15-60	26	2-24-45 thru 2-72-45	66	3-36 thru 3-72	66	4S, 4SS, 4SNYS, etc.	8
15S-16 thru 15S-60	27	25 & 27 CLIP	28	3-4-1/2G	7	50009	32, 79
15SH18 thru 15SH60	28	25&27H12 thru 25&27H60	28	3-4-1/2G(26)W-8	9	512 thru 572	49
16	68	25&27SH12 thru 25&27SH60	28	3-4-1/2G(42)W-4	9	5-3G, 5-3GW, 5-3HT, etc.	7
190-12 thru 190-60	66	25-12 thru 25-60	26	3-4-1/2G(67)-10POP	9	5-3S	8
190-18-45 thru 190-60-45	66	2-54	66	3-4-1/2GNY	7	55&65H24 thru 55&65H60	28
190C, 190CMA, etc.	65	25D, 25DS, 25E, etc.	29	35 CLIP	28	55&65RH12	29
190E, 190EE, etc.	65	25G1-1/4NY, 25G1-1/2NY	14	35-12 thru 35-60	26	55&65SH24	28
190ES, 190EST	65	25G12, 25G12NY	13	35E, 35N, etc.	29	550-1	47
190VP, 190VPB, etc.	65	25G1NY, 25G1-3/4NY, etc.	14	35H12 thru 35H60	28	550-1STS	47
1A, 1AS	29	25G2NY, 25G2-1/4NY, etc.	14	35RH12	29	550-3	47
1A-12 thru 1A-60	26	25G3NY, 25G3/4NY, etc.	14	35S-12 thru 35S-60	27	550-3STS	47
1C, 1CMA	65	25G4NY, 25G4-1/2NY, etc.	14	35SH12 thru 35SH48	28	550J18NC thru 550J60NC	47
1E	65	25G6, 25G5/8NY, etc.	13	36H	12	550J24NAC thru 550J54NAC	47
1G12, 1G12NY	10	25LEVER	22	36LEVER	22	550J24NCS thru 550J48NCS	47
1G6, 1G6NY	10	25LLG12, 25LLG12NY, etc.	13	36LLH, 36LLLPSS, etc.	12	550J24SC thru 550J48SC	47
1HT6, 1HT12	10	25LLG6, 25LLG6NY, etc.	13	36SPH, 36SPSS, etc.	12	550J24SSC thru 550J48SSC	47
1LLG12, 1LLG12NY	10	25LLSS6, 25LLSS12, etc.	13	36VL-7	22	550MA-1	47
1LLG6, 1LLG6NY	10	25S-12 thru 25S-60	27	375X-12 thru 375X-72	49	550MAJ18SSC thru	47
1LLHT6, 1LLHT12	10	25SRH12	29	375X-2, 375X-3, etc.	47	550MAJ48SSC	
1LLS6, 1LLS12	11	25SS1NYS, 25SS2NYS,	14	375XEJ18NB thru	46	550S-1	47
1LLS6NYS	11	25SS3NYS, etc.		375XEJ42NB		550S-1STS	47
1LLSPG6, 1LLSPG12	10	25VL-7	22	375XJ12NC thru 375XJ60NC	46		

Book Index By Ordering Number

Order Number	Page	Order Number	Page	Order Number	Page	Order Number	Page
550SJ18NCS thru 550SJ60NCS	47	ACS6-40-1 thru ACS6-84-1	59	B823	78	CBV-XS, CBV-S, etc.	81
550SJ18SSC thru 550SJ60SSC	47	Adapter Spring Clip	24	BB, BB4, BB455	76	Clamp Knob Assembly	38
55-12 thru 55-60	26	AERO-300, AERO-600, etc.	43	BBL-7, BBL-10	22	Clipper Scissors	41
5552	50	AERO-CABLE-230V1PH-6-15, AERO-CABLE-230V1PH-6-20, etc.	43	Binder	41	Clipper-Hook Gauge	41
5552	67	AERO-CABLE-230V3PH, AERO-CABLE-230V3PH- L15-20, etc.	43	Blade-6, Blade-10, etc.	40	CLIPS (550)	47
5552	85	AERO-O-STAND-E	43	Block-6, Block-10, etc.	40	CNBP-100, CNBP-250, etc.	89
55S-18	27	AERO-S10.5-10M, AERO-S10.5-900	43	BN-1	33, 41, 77	CNWP-100, CNWP-250, etc.	89
55S-24	27	AERO-S13-300, AERO-S13-600, etc.	43	BNBP-100, BNBP-500, etc.	89	Cover-12, Cover-25, etc.	23
55S-30	27	AH37530 thru AH37548	50	BNWP-100, BNWP-500, etc.	89	CSRL8C/D, CSRL8C/D-S, etc.	56
55S-36	27	AH530 thru AH548	50	BR101, BR103	70	CSRL8D, CSRL8D-S, etc.	56
55S-48	27	AMVBP-1200, AMVWP-1200	89	BR-14, BR-14MA	70	CSRL8E, CSRL8E-S, etc.	56
55W, 55WS	29	ANBP-100, ANBP-500, etc.	89	BR141	70	CSRL8F, CSRL8F-S, etc.	56
5APSS	12	ANWP-100, ANWP-500, etc.	89	BR151	72	CSRL8G, CSRL8G-S, etc.	56
5G, 5GW, 5HT, etc.	7	APC-1	18, 33, 41	BR300, BR359	72	CSRL8H, CSRL8H-S, etc.	56
5S, 5SS, 5SW, etc.	8	APF100B-50, APF100B-100, etc.	38	BR500D	72	CSRL8I, CSRL8I-S, etc.	56
62-RET-50	33	APF100BLUE-50, APF- 100BLUE-100, etc.	38	BR-530 thru BR-560	73	CSRL8J, CSRL8J-S, etc.	56
65-12 thru 65-60	26	APF100W-50, APF100W-100, etc.	38	BR6MA-SE	70	CSRL8K, CSRL8K-S, etc.	56
65X	29	APF150B-50, APF150B-100, etc.	38	BR6-SE-24 thru BR6-SE-42	70	CSRLA, CSRLA-S, etc.	56, 71
6APPSS	12	APF150BLUE-50, etc.	38	BR6S-SE-24 thru BR6S-SE-42	70	CSRLB, CSRLB-S etc.	56, 71
6APSS	12	APF150W-50, APF150W-100, etc.	38	Brass Bushing	24	CSRLC, CSRLC-S, etc.	56, 71
6D	49, 67	AR1P, AR3-15	36	BRP100-42 thru BRP100-72	73	CSRLC/D, CSRLC/D-S, etc.	56, 71
6FH	60, 77	ARJ4/100, ARJ6/150, etc.	36	BRP10AL-18AB thru BRP10AL-96AB	74	CSRLD, CSRLD-S, etc.	56, 71
6G, 6GW, 6HT, etc.	7	ARJ7/175	36	BRP2, BRP21, BRP26, etc.	73	CSRL E, CSRL E-S, etc.	56, 71
6S, 6SS, 6SW, etc.	8	ARSH4/100, ARSH6/150, etc.	36	BRP22-30 thru BRP22-60	73	CSRLF, CSRLF-S	56, 71
7	29	ARSH7/175	36	BRP3	72, 73	CSRLG, CSRLG-S	56
7-12 thru 7-60	26	ARSS1-7/175	36	BRP59-30 thru BRP59-60	73	CSRLG-S-W, CSRLG-W	56, 71
7G, 7GW	7	ART-7, ART-14, etc.	36	BRP6-10AL18CB thru BRP6-10AL96CB	74	Cutter-25-26	40
7S	8	ART7-5, ART7-7, etc.	36	BRP6AL-18AB thru BRP6AL-96AB	74	Cutter-Unibar Wire	41
7S-12 thru 7S-60	27	ARTK-7, ARTK-14	36	BRPS	62, 73	CV100, CV250	76
7SS, 7SW, etc.	8	ASL60/3, ASL60/30, etc.	39	BRR-1014, BRR-11, BRR-DP	72	CVGBNE, CVGBNE-300	87
7S-Trans	29	ASL60D/3, ASL60D/10, etc.	39	BT-1	67, 77	CVGBNEB, CVGBNEB-300	87
820/840-1CB	78	ASL90/3, ASL90/10, etc.	39	BV100	76	CVGBP-100, CVGBP-250, etc.	89
820/840WA	40, 78	ASL90D/3, ASL90D/10, etc.	39	BV20	76	CVGWNE, CVGWNE-300	87
840-36CL thru 840-72CL	40	ASLB60/3, ASLB60/30, etc.	39	BV250	76	CVGWNEB, CVGWNEB-300	87
840836 thru 840884	78	ASLB90/3, ASLB90/30, etc.	39	BVGBNE, BVGBNE-500	87	CVGWP-100, CVGWP-250, etc.	89
840SD	40, 78	ASLB90D/3, ASLB90D/10, etc.	39	BVGBNEB, BVGBNEB-500	87	CW1024, CW25/100, CWS1024	85
845836LD thru 845872LD	40	ASLHP60-C, ASLHP80-C, etc.	39	BVGBP-100, BVGBP-500, etc.	89	D750, D75050, etc.	76
845-CBK	40	AV20, AV100, etc.	76	BVGWNE, BVGWNE-500	87	DL065	19
8D	67, 78	AVGBNE, AVGBNE-500	87	BVGWNEB, BVGWNEB-500	87	DL065-C	17
900924 thru 900984	40, 78	AVGBNEB, AVGBNEB-500	87	BVGWNEB, BVGWNEB-500	87	DL065X25FT-W/5FT	18
900CBK	40, 78	AVGBP-100, AVGBP-500, AVGBP-1000	89	BVGWNEB, BVGWNEB-500	87	DL093, DL093-C, etc.	19
A10, A10S, etc.	85	AVGWNE, AVGWNE-500	87	BVGWNEB, BVGWNEB-500	87	DL109, DL109-C	19
A100P, A150P	39	AVGWNEB, AVGWNEB-500	87	BVGWNEB, BVGWNEB-500	87	DL125, DL125-C	19
A312	76	AVGWP-100, AVGWP-500, AVGWP-1000	89	C10, C10S	85	DR-SW	63
A31255	76	B10, B10S	85	C150	34	DSS065, DSS065-C	19
A31274	76	B1B, B2B	50, 67	C1C, C2C	67	DSS093, DSS093-C, etc.	19
AC-18 thru AC-48	48, 57	B437	76	C531, C53150, C53155, etc.	76	DSS109, DSS109-C	19
AC-18-1 thru AC-60-1	48, 47	B43740 thru B43774	76	C62520, C62523, C62540, etc.	76	EBC1, EBC1-B, etc.	78
AC6-24 thru AC6-84	58	B43774M	76	CABLE STRIPPER	18	EBC2, EBC2-B, etc.	78
AC6-24-1 thru AC6-72-1	58			Carding Paper Remover	41	EBC-EB, EBC-H	78
ACS-30 thru ACS-72	48, 57			Carrying Strap	20	EC1-1/4, EC1-1/4-C, etc.	84
ACS-30-1 thru ACS-72-1	48, 57			CBR6A, CBR6A-S, CBR6B, CBR6B, etc.	71	EC2, EC2-C, etc.	84
ACS6-36/900, ACS6-36/900-1	59			CBV-72, CBV-84, CBV-96	81	EC3, EC3-T, etc.	84
ACS6-40 thru ACS6-84	59					EC4, EC4-C, etc.	84
						EC6, EC6-C, etc.	84

Book Index By Ordering Number

Order Number	Page	Order Number	Page	Order Number	Page	Order Number	Page
ECF, ECFS, etc.	84	HPRET1, HPRET2	58	MPSK5, MPSK8	63	NYS053, NYS053-C, etc.	19
EH-12, EH-25, etc.	23	HR1-12, HR1-25, etc.	23	MSRT-30 thru MSRT-84	60	NYS065-1-1/2-100,	18
EPRDVS-DR, EPRDVS-K-1	63	HR1LW95, HR2LW95	22	MSRT-30-AL thru	60	NYS065-1-1/4-100, NYS065-12, etc.	17
Face Strip Knobs	20, 21	HR2-12, HR2-25, etc.	23	MSRT-96-AL	60	NYS065-C	19
FBG1	61, 67, 72, 77	HR25-12, HR25-25, etc.	23	MSRT8-48 thru MSRT8-84	60	NYS079, NYS079-C	19
FHGP18 thru FHGP60	46	HR36-12, HR36-25 etc.	23	MSRT8-48-AL thru	60	NYS093, NYS093-12, etc.	19
FHGP24-1 thru FHGP60-1	46	HRD-GB5-4, HRD-GB5-8, etc.	63	MSRT8-96-AL	60	NYS109, NYS109-12, etc.	19
FL1-1/2BNE	87	HSP3	61, 67, 72, 77	MSRT9-48 thru MSRT9-84	60	NYS125, NYS125-12, etc.	19
FL11C	67	HW1	50, 67	MW043, MW054, etc.	19	NYS156, NYS156-12, etc.	19
FL1BNE	87	HW2, HW3	67	N054, N093	19	ONBP-100, ONBP-500, etc.	89
FL7C	50, 67	K8VGWP-1500	89	NAC-18 thru NAC-72	48, 57	ONWP-100, ONWP-500, etc.	89
FL-CP-I, FLCP-ISS	82	L1/2-F, L1/2-FS, etc.	84	NAC-18-1 thru NAC-72-1	48, 57	OVGBNE-500, OVGB-	87
FL-L, FL-M	79	L1-1/2-B, L1-1/2-BS, etc.	84	NAC6-24 thru NAC6-84	59	NEB-500	89
FLM-PC	82	L1-1/2-W, L1-1/2-WS, etc.	84	NAC6-24-1 thru NAC6-84-1	59	OVGBP-100, OVGBP-500,	87
FL-PC-I, FL-PC-ISS	82	L1-B, L1-BS, etc.	84	NB-18-1 thru NB-42-1	48	etc.	87
FL-RBI, FL-RPI	82	L2-B, L2-BS, etc.	84	NC-12 thru NC-72	48, 57	OVGWNE, OVGWNE-500	87
FLSC-I, FLSC-ISS	82	L3/4-F, L3/4-FS etc.	84	NC-12-1 thru NC-72-1	48, 57	OVGWNEB, OVGWNEB-500	87
FLSCM-I	82	L3-B, L3-BS, etc.	84	NC187-C	32	OVGWP-100, OVGWP-500, etc.	89
FRT-1	77	L5/8-B, L5/8-BS, etc.	84	NC187-X	32	P1/2-F, P1/2-FS	85
VALU Lacers	21	Lacing Accessory Kit	41	NC1-C, NC1-X	32	P1P	50, 67, 85
FSGOLD1-24 thru	20	LG1-1/2LG1-1/2-C, etc.	85	NC-C	48, 57	P2C1, P2C2	24
FSGOLD2-60	20	LG2, LG2-C, etc.	85	NCS065, NCS093, etc.	19	P2C25/36	24
FSGOLD36-24 thru	20	LG3/4-F, LG3/4-FS, etc.	85	NCS065-C, NCS093-C, etc.	17	P2CLPR1, P2CLPR25, etc.	24
FSGOLD36-60	20	Linear Bearing	24	NCS065X10FT-W/10FT,	18	P2GF, P2GF15	24
FSGOLD4-1/2-24 thru	20	LP1/36 VALU	21	NCS065X25FT-W/5FT	18	P2P	67
FSGOLD4-1/2-60	20	LP1/36-12, LP1/36-25, etc.	23	NCS093X15FT-W/2FT,	18	P3/4-F, P3/4-FS	85
FSK-1A, FSK-1B, FSK-1BA	61, 79	LP2-12, LP2-25, etc.	23	NCS093X10FT-W/10FT, etc.	18	P3P	67, 85
FSK-1CFSK-1R, FSK-1S	61, 79	LPGOLD1/36-24 thru	20	NCS-12 thru NCS-72	48, 57	P4C1, P4C2	24
FSK-2, FSK-2F, FSK2-FDRA	61, 79	LPGOLD1/36-60	20	NCS125, NCS156, etc.	19	P4C25/36	24
FSMAN1-24 thru FSMAN1-60	20	LPGOLDREG-24 thru	20	NCS125-C, NCS156-C, etc.	17	P4CLPR1, P4CLPR25, etc.	24
FSMAN1-MICRO thru	21	LPGOLDREG-60	20	NCS1-C, NCS1-X	32	P4GF, P4GF15	24
FSMAN36-MICRO	20	LPMAN1/36-24 thru	20	NCS-20 thru NCS-60	48, 57	P6ALLI00M-24,	24
FSMAN2-24 thru	20	LPMAN1/36-60	20	NCS-24-1 thru NCS-72-1	48, 57	P6ALLI00M-36	24
FSMAN2-60	20	LPMAN1/36-MICRO,	21	NCS62-C, NCS62-X	32	P6ALLI15-24, P6ALLI15-36	24
FSMAN30-24 thru	20	LPMANREG-MICRO	20	NCS962-48-1 thru	59	P6C1, P6C2, P6C25/36	24
FSMAN30-60	20	LPMANREG-24 thru	20	NCS975-84-1	57	P6CLPR1M-24 thru	24
FSMAN36-24	20	LPMANREG-60	21	NCS-C	38	P6CLPR1M-60	24
thru FSMAN36-60	20	LPREG VALU	79	NL250-C, NL250-X	38	P6CLPR25M-24 thru	24
FSMAN4-1/2-24 thru	20	LSHD30 thru LSHD72	79	NL350-C, NL350-X	38	P6CLPR25M-60	24
FSMAN4-1/2-60	20	LSHDB30-2 thru LSHDB72-2	79	NP053, NP053-C	19	P6CLPR2M-24 thru	24
G1/2-F, G1/2-FS	85	LSHDLP	79	NP065, NP065-12, etc.	19	P6CLPR2M-60	24
G3/4-F, G3/4-FS	85	LSHD-RPK	79	NP079, NP079-C	19	P6CLPR36M-24 thru	24
G5/8-F, G5/8-FS	85	LSHDS	79	NP093, NP093-12, etc.	19	P6CLPR36M-60	38
GCB-50	41	LW95	22	NP109, NP109-12, etc.	19	PCA7-300, PCA7-600	85
GFSA00-14 thru GFSA00-36	21	M-4	41	NP125, NP125-12, etc.	19	PG2, PG3	44
GFSAM1&7-14	21	MARGB-7, MARGB-14	36	NP156, NP156-12, etc.	19	PLY130-Card Only	44
GFSAM1&7-24 thru	20	MART-7, MART-14	36	NS054, NS093	19	PLY130CT-3X230-60HZ,	44
GFSAM1&7-60	20	MART-GBFV, MART-GBK, etc.	36	Nut Driver for	20	PLY130CT-3X460-60HZ, etc.	44
Guide Block	20, 21	MARTK-7, MARTK-14	36	Roller Lacer Gold Class	19	PLY130SA-	44
Replacement Kit	50	MBRT10-30-AL thru	72	NY053, NY053-C	19	230V3PH60HZ-L15-20,	44
H100	50, 67	MBRT10-96-AL	72	NY065, NY065-1-1/2-100,	19	PLY130SA-	44
HB1	67	MBRT6-30-AL thru	72	NY065-1-1/4-100, etc.	19	230V3PH60HZ-L15-30, etc.	44
HB2, HB3	84	MBRT6-96-AL	72	NY079, NY079-C	19	PLY130WB-	44
HD1, HD1-1/4-F etc.	84	MBRTA-30 thru MBRTA-96	72	NY093, NY093-100, etc.	19	230V3PH60HZ-L15-20, etc.	44
HD2	50, 67, 85	MDT-1	38	NY109, NY109-12, etc.	19	PLY-BL Blade & Jig,	44
HP1	67	MDT220-1	38	NY125, NY125-12, etc.	19	PLY-JG Jig	39
HP2	67, 85	MICROLACER	21	NY156, NY156-12, etc.	19	POLY035X15FT-W/3FT,	39
HP3						POLY047X15FT-W/3FT	

Book Index By Ordering Number

Order Number	Page	Order Number	Page	Order Number	Page	Order Number	Page
PRL4	39	RS187J18/450SP thru	31	SR9-30-AL thru SR9-96-AL	62	T2-1/2BP-50, T2-1/2BP-150, etc.	88
PRO-200, PRO-200EH	24	RS187J60SP		SRA, SRA-100, SRA-2M,	52, 55, 71	T2-1/2WP-50, T2-1/2WP-150, etc.	88
PRO-400, PRO-600,	24	RS187SJ12/300NCS thru	31	SRA-S, SRA-S-2M		T-2BNI, T-2BNIB	86
PRO-6000		RS187SJ60NCS		SRAA, SRAA-100, SRAA-2M,	52	T2BP-100, T2BP-250, etc.	88
PTAH	63	RS187SJ12/300SS thru	31	SRAA-S, SRB-S-2M		T2SC00PWP-100,	
PTL1, PTL25, PTL30	22	RS187SJ60SS		SRB, SRB-100, SRB-2M,	52, 55, 71	T2SC00PWP-200	88
PTRD-DR, PTRDK,	63	RS62J12/300NC thru	31	SRB-S		T2W, T2-WNI, etc.	68
PUN-B-50X20-300,	44	RS62J60NC		SRC, SRC/D, SRC/D-2M,	55, 71	T-2WNIB, T-3BNIB	86
PUN-B-50X20-600, etc.		RS62J12/300SP thru	31	SRC/D-S, SRC/D-S-2M		T2WP-100, T2WP-250, etc.	88
PUN-B-70X15-300,	44	RS62J60SP		SRC-100, SRC-2M, SRC-S,	55, 71	T2WS72	68
PUN-B-70X15-600 etc.		RS62MJ24/600MS	31	SRC-S-2M		T-3/4BNIB	86
PUN-B-80X20-300, PUN-B-	44	RS62SJ12/300NCS thru	31	SR-CB	60	T3/4BP-100, T3/4BP-500	88
80X20-600, etc.		RS62SJ60NCS		SRD, SRD-2M, SRD-S,	55, 71	T-3/4WNI, T-3/4WNIB	86
PUN-M-300, PUN-M-600,	44	RS62SJ12/300SS thru	31	SRD-S-2M		T3/4WP-100, T3/4WP-500	88
etc.		RS62SJ60SS		SRE, SRE-2M, SRE-S,	55, 71	T3BP-100, T3BP-200, etc.	88
etc.		RSAS-1	32	SRE-S-2M		T3SC00BP-50,	88
QDBinder	41	RSC187, RSC187-12, etc.	33	SRF, SRF-2M, SRF-S, SRF-	55, 71	T3SC00BP-100, etc.	88
R-10	22	RS-GOLD-DRIVER	33	SRG, SRG-2M, SRG-S,	55, 71	T3WP-50, T3WP-100, etc.	88
R2-12/300 thru R2-60/1500	52	RS-GOLD-FINAL-6 thru	33	SRG-S-2M		TH1-1/2BP-400, TH1-	88
R2MA-SE	52	RS-GOLD-FINAL-48		SRH, SRH-2M, SRH-S,	55, 71	1/2WP-400	
R2S-12/300 thru R2S-60/1500	52	RS-GOLD-INITIAL-6 thru	33	SRH-S-2M		TH3BP-50, TH3BP-100, etc.	88
R2T, R2T-AI	52	RS-GOLD-INITIAL-48		SRI, SRI-2M, SRI-S, SRI-	55, 71	TH3WP-50, TH3WP-100, etc.	88
R-4, R-7	22	RSTK4-6, RSTK4-12	32	S-2M		TH4BP-100	88
R5-1/2MA-SE	53	RT5/8	77	SRJ, SRJ-S, SRJ-S-2M	55, 71	U2	15, 16
R5-1/2-SE-18/450 thru	53	RTBS Rough Top Skiver	33, 41	SRK, SRK-S, SRK-S-2M	55, 71	U3	15, 16
R5-1/2-SE-72/1800		RTG-2	77	SRPS-AL	62	U4	15, 16
R5MA-SE	53	S100B	38	SRTA-30 thru SRTA-84	61	U5	15, 16
R5S	52, 61	S125, S187	34	SS1-16/400	32	U6	15
R5-SE-18/450 thru	53	S150B	38	SS1-18/450	32	U7	16
R5-SE-72/1800		S1S	50, 67	SS1-20	32	UA2, UA3	16
R6-SE-36/900 thru R9S-	54	S2S, S3S	67	SS1-24/600	32	UCM	16
SE-84/2130		SC-18 thru SC-60	48, 57	SS1-30/750	32	Urethane Strip – Priced	
RAR5-1/2-SE-24/600 thru	53	SC-24-1 thru SC-72-1	48, 57	SS1-36/900	32	Per Foot	20
RAR5-1/2-SE-72/1800		SC6-36 thru SC6-84	58	SS1-42 thr SS1-60	32	Urethane Strip – Priced	
RAR5-SE-24/600 thru RAR5-	53	SC6-38-1 thru SC6-84-1	58	SS2-18/450 thru SS2-60	32	Per Foot	21
SE-60/1500		SC932-18-1 thru SC932-72-1	58	SS62-12/300 thru SS62-60	32	UX1	15, 16
RAR6LP-SE-42/1050 thru	54	SC932-30 thru SC932-60	58	SSC-18 thru SSC-60	48, 57	VBK-72, VBK-84, VBK-96	81
RAR6LP-SE-84/2130		SL5-1	60, 67, 72, 77	SSC-24-1 thru SSC-72-1	48, 57	VUBK-72, VUBK-84,	81
RAR6-SE-42/1050 thru RAR8-	54	SM054, SM093	19	SSC932-18-1 thru	58	VUBK-96	
SE-84/2130		SMARTCLAMP	40	SSC932-72-1		VBK-XS, VBK-S, VBK-M,	81
RB-1	36, 41, 85	SMS040, SMS054, etc.	19	SSC932-30 thru SSC932-60	58	VBK-L	
RBP1E-S, RBP1E-M, etc.	80	SP1-16/400 thru SP1-60	32	ST-28	33	VUBK-XS, VUBK-S,	81
RBP1S-S, RBP1S-M, etc.	80	SP2-18/450 thru SP2-60	32	ST3-3, ST3-9, etc.	34	VUBK-M, VUBK-L	
RBPER-S, RBPER-M, etc.	80	SP62-12/300 thru SP62-60	32	ST4-5, ST4-8, etc.	34		
RBPRET	80	SR22-AL, SR22SA, etc.	62	ST5-3, ST5-5, etc.	34		
RBPSR-S, RBPSR-M, etc.	80	SR23, SR23-AL, etc.	62	ST6-9	33		
Return Springs	24	SR2-30 thru SR2-84	62	ST7-5, ST7-9, etc.	33		
RL-24 thru RL-60	20	SR2-30-AL thru SR2-96-AL	62	T1/2BP-100, T1/2BP-500	88		
RL-G24 thru RL-G60	20	SR-50	52, 61, 72	T-1/2WNI, T-1-1/2WNI, etc.	86		
RP1C, RP1E, etc.	68	SR5-1	62	T1/2WP-100, T1/2WP-500	88		
RP2C, RP2E, etc.	68	SR5-7	52, 61	T-1-1/2BNI, T-1-1/2BNIB	86		
RS125J10NC thru	31	SR700, SR800, SR900	60	T1-1/2BP-100, T1-1/2BP-300, etc.	88		
RS125J48NC		SR747, SR747-AL	62	T-1-1/2WNIB	86		
RS125J16/400SP thru	31	SR757	62	T1-1/2WP-100, T1-1/2WP-300, etc.	88		
RS125J48SP		SR759	60, 72	T-1BNI, T-1BNIB	86		
RS125SJ20/500SS thru	31	SR759-2	60	T1BP-100, T1BP-400, etc.	88		
RS125SJ60SS		SR859-8	60	T-1WNI, T-1WNIB	86		
RS125SJ24/600NCS thru	31	SR91-AL	62	T1WP-100, T1WP-400, etc.	88		
RS125SJ60NCS		SR9-30 thru SR9-84	62				
RS187J12/300NC thru	31						
RS187J60NC							

Book Index By Item Code

Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page
O		01338	15	01848	9	02090	10	02173	7	02284	10	02383	12	02631	19
01125	15	01340	16	01849	9	02100	10	02173	7	02285	10	02384	12	02632	18
01126	15	01342	16	01853	9	02101	10	02174	8	02287	11	02385	12	02633	18
01137	15	01350	41	01854	9	02102	10	02175	8	02288	11	02386	12	02634	18
01138	15	01351	15	01859	14	02103	10	02182	7	02289	11	02397	8	02635	18
01143	15	01352	15	01861	14	02104	11	02183	7	02294	8	02429	7	02636	18
01144	15	01353	16	01864	14	02105	11	02185	8	02295	7	02429	7	02637	18
01178	15	01354	16	01871	14	02106	11	02186	8	02295	7	02432	7	02638	18
01179	15	01355	15	01879	14	02110	11	02187	8	02300	7	02432	7	02639	18
01183	15	01356	15	01884	14	02111	11	02189	7	02301	7	02574	18	02640	18
01184	15	01357	16	01887	14	02113	10	02189	7	02303	8	02576	18	02641	18
01188	16	01358	16	01891	14	02114	10	02191	8	02304	8	02577	18	02642	18
01189	16	01359	15	01898	14	02118	10	02193	8	02305	8	02578	18	02643	18
01193	16	01360	15	01911	14	02119	10	02195	8	02307	7	02579	18	02644	18
01194	16	01361	15	01917	14	02120	10	02196	7	02307	7	02580	18	02645	19
01230	15	01362	15	01920	14	02126	11	02197	7	02310	8	02581	18	02646	19
01231	15	01363	15	01926	14	02128	11	02198	7	02316	7	02582	18	02648	19
01250	15	01364	15	01933	14	02130	11	02198	7	02316	7	02583	18	02649	17
01251	15	01385	16	01939	14	02133	10	02206	7	02323	7	02584	18	02650	18
01254	15	01732	14	01941	14	02139	10	02209	9	02326	8	02585	18	02651	19
01255	15	01744	14	01946	14	02140	10	02210	7	02327	8	02586	18	02652	17
01258	16	01746	13	01949	14	02141	10	02216	7	02328	8	02587	18	02656	18
01279	15	01748	13	01954	14	02143	11	02217	7	02330	7	02588	18	02657	19
01283	15	01752	13	01958	14	02144	11	02219	8	02330	7	02589	18	02658	17
01292	16	01754	13	01963	14	02145	11	02220	8	02339	7	02590	18	02662	18
01293	16	01764	13	01970	14	02146	11	02221	8	02340	7	02591	18	02663	19
01294	15	01766	13	01985	13	02147	11	02223	7	02341	8	02592	18	02664	17
01301	15	01772	13	01987	13	02149	10	02223	7	02342	7	02594	19	02668	18
01305	15	01774	13	01990	13	02150	10	02225	8	02342	7	02595	19	02669	19
01308	16	01786	14	01993	13	02154	7	02227	8	02348	7	02597	19	02670	17
01309	16	01793	14	02006	13	02155	7	02232	7	02351	8	02598	17	02725	19
01312	16	01798	14	02008	13	02155	7	02233	7	02352	8	02600	18	02726	17
01313	16	01810	13	02010	13	02157	8	02234	8	02353	8	02606	19	02727	19
01314	16	01811	13	02012	13	02158	8	02239	11	02355	7	02607	17	02731	19
01315	16	01813	13	02072	10	02159	8	02240	11	02355	7	02611	18	02732	17
01317	16	01814	13	02073	10	02161	7	02242	10	02363	7	02613	19	02736	19
01318	16	01817	13	02075	10	02161	7	02243	10	02365	7	02614	17	02737	17
01319	16	01818	13	02076	10	02163	8	02267	10	02367	8	02619	18	02738	19
01320	16	01821	13	02079	11	02164	8	02268	10	02368	8	02621	19	02742	19
01321	16	01828	14	02080	11	02168	7	02269	10	02370	8	02622	17	02743	17
01322	16	01831	9	02081	11	02169	7	02272	11	02378	12	02625	18	02744	19
01323	16	01841	14	02082	11	02169	7	02274	11	02379	12	02627	19	02750	19
01324	16	01845	14	02083	11	02170	8	02275	11	02380	12	02628	17	02751	17
01325	16	01846	9	02084	11	02171	8	02278	10	02381	12	02629	19	02755	19
01336	15	01847	9	02089	10	02172	8	02283	10	02382	12	02630	19	02756	17
														03006	40
														03008	40
														03009	40

Book Index By Item Code

Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page
03010	40	03241	18	03649	24	03772	40	04017	20	04102	40	08001	43	08106	43
03012	40	03244	41	03650	24	03773	40	04018	20	04140	78	08002	43	08107	43
03014	22	03274	20	03651	24	03774	40	04019	21	04143	40	08003	43	08108	43
03018	22	03274	21	03670	41	03775	40	04020	20	04143	78	08004	43	08109	43
03019	22	03328	21	03671	41	03814	22	04021	20	04144	40	08005	43	08110	43
03020	22	03339	21	03672	41	03817	20	04022	20	04144	78	08006	43	08111	43
03037	23	03368	21	03704	41	03817	21	04023	20	04145	40	08008	43	08112	43
03038	23	03370	20	03707	24	03822	23	04024	21	04145	78	08012	44	08113	43
03039	23	03371	20	03708	24	03822	23	04025	20	04146	40	08013	44	08114	43
03051	23	03372	20	03709	24	03823	23	04026	20	04146	78	08014	44	1	
03054	23	03375	20	03710	24	03824	23	04027	20	04147	40	08015	44	10000	29
03074	22	03425	21	03711	24	03827	22	04028	20	04147	78	08016	44	10001	29
03075	22	03429	21	03712	24	03897	20	04029	21	04149	40	08017	44	10002	29
03076	22	03430	21	03713	24	03897	21	04030	20	04149	78	08018	44	10003	29
03081	22	03431	21	03714	24	03914	24	04031	20	04200	40	08019	44	10004	29
03085	22	03433	20	03715	24	03915	24	04032	20	04200	78	08020	44	10005	29
03128	41	03433	21	03716	24	03916	24	04033	20	04223	22	08021	44	10007	29
03129	41	03434	22	03717	24	03917	24	04034	20	05019	18	08022	44	10008	29
03132	41	03435	22	03718	24	03919	24	04035	20	05020	18	08023	44	10009	29
03140	24	03441	41	03719	24	03920	24	04036	20	05021	18	08024	44	10011	29
03143	23	03442	41	03720	24	03985	20	04037	20	05022	18	08025	44	10012	29
03148	23	03445	41	03721	24	03986	20	04038	20	05023	18	08026	44	10013	29
03150	23	03450	40	03722	24	03987	20	04039	20	05024	18	08027	44	10014	29
03154	23	03451	40	03723	24	03988	20	04040	20	05025	18	08032	43	10020	29
03155	23	03452	23	03724	24	03996	21	04041	20	05193	18	08033	43	10021	29
03156	23	03453	23	03725	24	03997	20	04042	20	05194	18	08034	43	10022	29
03162	23	03519	23	03726	24	03998	20	04043	20	05195	18	08035	43	10023	29
03163	23	03524	24	03727	24	03999	20	04044	19	05196	18	08036	43	10024	29
03167	23	03525	24	03728	24	04000	20	04044	20	05200	39	08037	43	10030	28
03168	23	03526	24	03729	24	04001	21	04045	20	05201	39	08038	43	10031	28
03168	23	03527	24	03731	24	04002	20	04046	20	05338	15	08039	43	10033	28
03169	23	03528	24	03732	24	04003	20	04047	20	05339	15	08040	43	10034	28
03169	23	03529	24	03733	24	04004	20	04048	20	05339	15	08041	43	10035	28
03170	23	03531	24	03734	24	04005	20	04049	20	05340	15	08046	44	10037	28
03170	23	03532	24	03735	24	04006	20	04051	20	05340	15	08047	44	10038	28
03211	23	03533	24	03736	24	04007	20	04052	20	05341	15	08049	44	10050	26
03211	23	03534	24	03737	24	04008	20	04063	21	05341	15	08051	44	10051	26
03222	23	03535	24	03738	24	04009	20	04064	20	05342	15	08052	44	10052	26
03222	23	03536	24	03739	24	04010	20	04065	20	05342	15	08053	44	10053	26
03225	23	03537	24	03740	24	04011	20	04066	20	05343	15	08054	44	10054	26
03230	40	03538	24	03741	24	04012	20	04067	20	05343	15	08055	44	10055	26
03236	22	03539	24	03742	24	04013	20	04068	20	05362	7	08056	44	10056	26
03238	22	03550	24	03743	24	04014	21	04073	40	05362	7	08103	43	10059	26
03239	33	03551	24	03744	24	04015	20	04093	19	05463	39	08104	43	10061	26
03239	41	03591	24	03745	24	04016	20	04101	40	08000	43	08105	43	10062	26

Book Index By Item Code

Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page
10132	26	10185	26	10494	27	10573	27	10641	27	11148	28	11913	28	15008	36
10133	26	10188	26	10495	27	10574	27	10643	27	11150	28	11925	28	15009	36
10134	26	10190	26	10496	27	10575	27	10644	27	11152	28	11928	28	15010	36
10135	26	10191	26	10512	29	10577	27	10645	27	11154	28	11931	28	15011	36
10137	26	10192	26	10513	29	10579	27	10646	27	11157	28	11934	28	15012	36
10138	26	10193	26	10514	29	10580	27	10648	27	11160	28	11936	28	15013	36
10139	26	10194	26	10515	29	10581	27	10651	27	11163	28	11938	28	15014	36
10140	26	10196	26	10516	29	10582	27	10653	27	11165	28	11940	28	15015	36
10141	26	10197	26	10517	29	10584	27	10654	27	11167	28	11950	28	15017	36
10142	26	10198	26	10519	29	10586	27	10655	27	11169	28	11956	28	15025	36
10144	26	10199	26	10521	29	10587	27	10657	27	11187	28	11959	28	15026	36
10150	26	10201	26	10522	29	10589	27	10661	27	11190	28	11961	28	15027	36
10151	26	10204	26	10523	29	10590	27	10664	27	11193	28	11963	28	15027	36
10152	26	10206	26	10528	27	10591	27	10667	27	11195	28	11982	28	15028	36
10153	26	10207	26	10529	27	10593	27	10669	27	11197	28	11984	28	15029	36
10154	26	10208	26	10530	27	10595	27	10670	27	11199	28	11998	28	15030	36
10155	26	10210	26	10531	27	10596	27	10671	27	11205	28	12375	29	15031	36
10156	26	10212	26	10532	27	10597	27	10677	27	11210	28	12376	29	15032	36
10157	26	10213	26	10534	27	10598	27	10680	27	11212	28	12378	29	15033	36
10158	26	10214	26	10537	27	10600	27	10683	27	11214	28	12379	29	15035	36
10160	26	10215	26	10539	27	10603	27	10685	27	11220	28	12380	29	18015	22
10161	26	10217	26	10540	27	10605	27	10687	27	11225	28	12381	29	18016	22
10162	26	10220	26	10541	27	10606	27	11075	28	11227	28	12388	29	18017	22
10163	26	10222	26	10543	27	10607	27	11078	28	11229	28	12389	29	18036	24
10164	26	10223	26	10545	27	10609	27	11081	28	11831	28	13250	28	18043	24
10165	26	10224	26	10546	27	10611	27	11084	28	11836	28	13252	28	18046	24
10166	26	10226	26	10547	27	10612	27	11086	28	11838	28	13253	28	18047	24
10167	26	10232	26	10548	27	10613	27	11088	28	11840	28	13254	28	18048	24
10168	26	10235	26	10549	27	10614	27	11090	28	11846	28	13256	28	18052	24
10169	26	10238	26	10551	27	10616	27	11092	28	11849	28	14983	36	18055	24
10170	26	10240	26	10554	27	10619	27	11095	28	11852	28	14990	36	18056	24
10171	26	10242	26	10556	27	10621	27	11098	28	11855	28	14991	36	18057	24
10172	26	10244	26	10557	27	10622	27	11101	28	11857	28	14992	36	18100	41
10173	26	10482	26	10558	27	10623	27	11103	28	11859	28	14993	36	18101	41
10174	26	10483	26	10559	27	10625	27	11105	28	11861	28	14994	36	18180	12
10175	26	10484	26	10560	27	10627	27	11107	28	11878	28	14995	36	18181	12
10176	26	10485	26	10562	27	10628	27	11126	28	11881	28	15000	36	18182	12
10177	26	10486	26	10563	27	10629	27	11129	28	11884	28	15001	36	18183	12
10178	26	10487	26	10564	27	10630	27	11132	28	11886	28	15002	36	18227	7
10179	26	10488	26	10565	27	10632	27	11134	28	11888	28	15003	36	18228	7
10180	26	10489	26	10566	27	10635	27	11136	28	11890	28	15004	36	18243	21
10181	26	10491	27	10568	27	10637	27	11138	28	11906	28	15005	36	18244	20
10182	26	10492	27	10570	27	10638	27	11142	28	11909	28	15006	36	18245	20
10183	26	10493	27	10571	27	10639	27	11145	28	11911	28	15007	36	18248	21

Book Index By Item Code

Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page
19361	24	20001	65	20096	68	20387	49	30421	79	30474	67	30553	66	30653	66
19362	24	20002	65	20118	65	20387	68	30423	79	30474	85	30556	66	30655	66
19364	24	20004	65	20119	65	20388	68	30424	79	30475	67	30557	66	30661	66
19365	24	20005	65	20122	65	20391	68	30430	79	30479	67	30558	66	30663	66
19366	24	20006	65	20123	65	20397	49	30435	60	30480	67	30559	66	30666	66
19368	24	20006	68	20124	65	20397	68	30435	72	30481	50	30560	66	30667	66
19370	24	20007	65	20164	65	20397	68	30435	77	30481	67	30561	66	30668	66
19371	24	20008	65	20168	65	20398	49	30436	49	30481	85	30562	66	30669	66
19373	24	20010	68	20169	65	20398	68	30436	67	30483	66	30564	66	30671	66
19375	24	20011	68	20191	65	20399	49	30437	67	30484	66	30567	66	30673	66
19376	24	20012	65	20200	68	20399	68	30437	78	30485	66	30569	66	30676	66
19378	24	20013	65	20201	68	20400	49	30438	67	30486	66	30572	66	30678	66
19380	24	20014	65	20202	68	20400	68	30439	67	30487	66	30573	66	30681	66
19395	24	20016	65	20203	68	20406	68	30442	50	30488	66	30574	66	30682	66
19460	39	20017	65	20204	68	20407	68	30442	67	30491	66	30575	66	30684	66
19461	39	20018	65	20205	68	20409	68	30443	67	30492	66	30576	66	30707	66
19462	39	20018	68	20206	68	20410	68	30444	67	30493	66	30577	66	30709	66
19463	39	20019	65	20327	65	20411	68	30445	50	30494	66	30578	66	30712	66
19466	39	20020	65	20330	65	20412	68	30446	50	30500	66	30585	66	30713	66
19467	39	20022	68	20331	65	20414	68	30447	50	30501	66	30588	66	30714	66
19468	39	20023	68	20334	65	3		30447	67	30502	66	30589	66	30715	66
19473	39	20034	65	20335	65	30001	78	30448	67	30503	66	30590	66	30717	66
19474	39	20035	65	20336	65	30002	78	30449	67	30504	66	30591	66	30725	66
19475	39	20038	65	20340	65	30003	78	30460	50	30505	66	30592	66	30728	66
19476	39	20039	65	20341	65	30004	78	30460	67	30506	66	30593	66	30729	66
19477	39	20040	65	20344	65	30005	78	30460	85	30507	66	30594	66	30730	66
19478	39	20040	68	20345	65	30006	78	30461	67	30508	66	30600	66	30733	66
19479	39	20041	68	20346	65	30007	78	30462	67	30509	66	30601	66	30799	49
19480	39	20042	68	20364	65	30008	78	30462	85	30510	66	30604	66	30800	49
19481	39	20056	65	20365	65	30375	60	30463	50	30511	66	30605	66	30801	49
19483	39	20057	65	20366	65	30375	77	30463	67	30513	66	30606	66	30802	49
19484	39	20058	65	20367	65	30390	79	30463	85	30516	66	30607	66	30803	49
19485	39	20059	65	20368	65	30392	79	30464	67	30517	66	30608	66	30804	49
19486	39	20060	65	20370	65	30393	79	30465	67	30518	66	30609	66	30805	49
19489	39	20061	65	20371	65	30394	79	30465	85	30519	66	30610	66	30806	49
19490	39	20080	65	20372	65	30395	79	30468	50	30520	66	30620	66	30807	49
19491	39	20081	65	20373	65	30396	79	30468	67	30521	66	30621	66	30808	49
19494	39	20082	65	20377	68	30397	79	30469	67	30524	66	30622	66	30809	49
19701	20	20083	65	20378	68	30398	79	30470	67	30525	66	30624	66	30810	49
19702	20	20090	65	20379	68	30399	79	30471	50	30526	66	30625	66	30811	49
19703	20	20091	65	20380	49	30400	79	30471	67	30527	66	30647	66	30813	49
19704	20	20094	65	20381	49	30408	79	30472	67	30548	66	30650	66	30814	49
2		20095	65	20381	68	30414	79	30473	67	30551	66	30651	66	30815	49
20000	65	20096	65	20382	68	30418	79	30474	50	30552	66	30652	66	30816	49

Book Index By Item Code

Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page
30915	49	31996	61	38010	57	38116	48	38180	48	38341	58	38419	58	39628	46
30916	49	31996	79	38011	48	38116	57	38180	57	38342	58	38420	58	39629	46
30917	49	31999	61	38011	57	38117	48	38182	48	38343	58	38425	58	39675	47
30918	49	31999	79	38012	48	38117	57	38182	57	38344	58	38426	58	39740	48
30919	49	32051	61	38012	57	38129	48	38183	48	38345	58	38427	58	39740	57
30921	78	32051	79	38013	48	38129	57	38183	57	38348	58	38428	58	39802	57
30932	60	32052	61	38013	57	38130	48	38184	48	38349	58	38429	58	39808	57
30932	67	32052	79	38041	48	38130	57	38184	57	38350	58	39274	59	39811	57
30932	72	32056	61	38041	57	38131	48	38185	48	38351	58	39275	59	39812	57
30932	77	32056	79	38043	48	38131	57	38185	57	38352	58	39276	59	39817	57
30937	78	32267	78	38043	57	38132	48	38188	57	38355	58	39277	59	39842	47
30938	78	32268	78	38044	48	38132	57	38195	57	38362	58	39278	59	39855	47
30939	78	32269	78	38044	57	38133	48	38199	48	38363	58	39279	59	39904	47
30940	78	32270	78	38045	48	38133	57	38199	57	38364	58	39280	59	39907	46
30941	78	32271	78	38045	57	38134	48	38201	48	38365	58	39281	59	39917	47
30950	49	32272	40	38046	48	38134	57	38201	57	38366	58	39282	59	39935	47
30951	49	32272	78	38046	57	38135	48	38202	48	38367	58	39283	59	39938	47
30952	49	32273	78	38047	48	38135	57	38202	57	38368	58	39300	59	39939	47
30953	49	32274	40	38047	57	38136	48	38203	48	38369	58	39301	59	39950	47
30954	49	32274	78	38048	48	38136	57	38203	57	38370	58	39302	59	39951	47
30961	78	32275	40	38048	57	38137	48	38204	48	38371	58	39303	59	39952	47
30962	78	32276	40	38049	48	38137	57	38204	57	38372	58	39304	59	39953	47
30963	78	32277	40	38049	57	38138	48	38205	57	38373	58	39305	59	39957	47
30964	78	32278	40	38075	48	38138	57	38211	57	38374	58	39306	59	39958	47
30965	78	32279	40	38077	48	38143	58	38222	57	38375	58	39307	59	39959	47
31071	78	38000	48	38079	48	38144	59	38240	57	38376	58	39308	59	39978	46
31075	67	38000	57	38080	48	38145	59	38300	58	38377	58	39309	59	39980	46
31075	77	38001	48	38081	48	38146	59	38301	58	38378	58	39574	47	39982	46
31978	61	38001	57	38108	48	38147	59	38302	58	38380	58	39577	47	39984	46
31978	67	38002	48	38108	57	38148	59	38303	58	38381	58	39580	47	39986	46
31978	72	38002	57	38109	48	38149	59	38305	58	38387	58	39583	47	39997	46
31978	77	38003	48	38109	57	38150	59	38312	58	38390	58	39586	47	4	40069
31980	61	38003	57	38110	48	38151	59	38317	58	38401	58	39589	47	40000	46
31980	67	38004	48	38110	57	38154	59	38320	58	38403	58	39603	46	40001	46
31980	72	38004	57	38111	48	38161	58	38321	58	38404	58	39605	46	40002	46
31980	77	38005	48	38111	57	38162	58	38322	58	38405	58	39607	46	40003	46
31987	61	38005	57	38112	48	38164	58	38323	58	38406	58	39610	46	40004	46
31987	79	38007	48	38112	57	38165	58	38325	58	38409	58	39613	46	40005	46
31991	61	38007	57	38113	48	38166	58	38335	58	38410	58	39615	46	40006	46
31991	79	38008	48	38113	57	38167	58	38336	58	38411	58	39617	46	40007	46
31992	61	38008	57	38114	48	38168	58	38337	58	38412	58	39624	46	40008	46
31992	79	38009	48	38114	57	38169	58	38338	58	38413	58	39625	46	40009	46
31993	61	38009	57	38115	48	38170	58	38339	58	38417	58	39626	46	40010	46
31993	79	38010	48	38115	57	38171	58	38340	58	38418	58	39627	46	40012	46

Book Index By Item Code

Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page
40109	47	40177	57	40244	47	40510	52	40541	55	40669	59	40776	60	40892	56
40110	47	40178	48	40245	47	40510	61	40541	71	40670	59	40782	60	40892	71
40134	47	40178	57	40246	47	40510	72	40542	52	40671	59	40783	60	40893	56
40135	50	40179	48	40247	47	40511	62	40542	55	40679	59	40784	60	40893	71
40135	57	40179	57	40348	52	40517	52	40542	71	40680	59	40785	60	40895	56
40138	47	40180	48	40348	61	40517	61	40543	52	40681	59	40786	70	40895	71
40150	48	40180	57	40389	54	40520	55	40543	55	40682	70	40787	70	40897	56
40151	48	40181	48	40390	54	40520	71	40543	71	40683	70	40788	70	40897	71
40152	48	40181	57	40391	54	40522	55	40544	55	40684	70	40789	70	40898	56
40153	48	40182	48	40392	54	40522	71	40544	71	40685	48	40790	70	40898	71
40153	57	40182	57	40393	54	40523	55	40545	55	40685	57	40791	70	40899	56
40154	48	40183	48	40399	54	40523	71	40545	71	40686	48	40793	72	40899	71
40155	48	40198	58	40408	54	40527	52	40546	55	40686	57	40794	72	40901	56
40155	57	40199	58	40409	54	40527	55	40546	71	40687	48	40796	72	40901	71
40156	48	40201	57	40415	54	40527	71	40547	55	40687	57	40800	73	40907	72
40156	57	40202	48	40416	54	40528	52	40547	71	40688	48	40801	73	40907	73
40157	48	40202	57	40424	52	40528	55	40548	55	40688	57	40802	73	40908	62
40157	57	40203	48	40455	52	40528	71	40548	71	40689	48	40803	73	40908	73
40158	48	40204	48	40468	52	40529	55	40629	48	40689	57	40804	73	40915	73
40158	57	40204	57	40469	52	40529	71	40629	57	40691	48	40828	54	40916	73
40159	48	40205	48	40479	52	40530	55	40631	48	40691	57	40829	54	40918	73
40159	57	40205	57	40482	62	40530	71	40631	57	40692	48	40830	54	40919	73
40160	48	40206	48	40483	62	40531	55	40632	48	40692	57	40831	54	40920	72
40160	57	40206	57	40484	62	40531	71	40632	57	40707	58	40832	54	40921	72
40161	48	40207	48	40485	62	40532	55	40633	48	40709	58	40833	54	40922	72
40161	57	40207	57	40487	62	40532	71	40633	57	40710	58	40834	54	40923	72
40162	48	40209	57	40488	62	40533	55	40634	48	40712	58	40857	56	40924	72
40162	57	40210	48	40489	62	40533	71	40634	57	40713	58	40857	71	40925	72
40163	48	40210	57	40493	62	40534	55	40636	48	40714	58	40858	56	40927	72
40163	57	40211	48	40494	62	40534	71	40636	57	40716	58	40858	71	40928	72
40164	47	40211	57	40495	62	40535	55	40637	48	40718	58	40859	56	40930	73
40165	47	40212	48	40496	62	40535	71	40637	57	40720	58	40859	71	40940	59
40166	47	40212	57	40497	62	40536	55	40638	48	40721	58	40860	56	40941	59
40167	47	40213	48	40498	62	40536	71	40639	48	40750	70	40860	71	40942	59
40168	47	40213	57	40499	62	40537	55	40640	48	40751	70	40861	56	40943	59
40169	47	40214	48	40502	62	40537	71	40652	62	40752	70	40861	71	40955	56
40170	48	40214	57	40503	62	40538	55	40654	59	40753	70	40862	56	40955	71
40171	48	40225	46	40504	62	40538	71	40657	59	40755	70	40862	71	40956	56
40172	48	40226	46	40506	55	40539	52	40658	70	40756	70	40863	56	40956	71
40173	48	40227	46	40506	71	40539	55	40659	59	40760	72	40863	71	40957	56
40174	48	40228	46	40507	55	40539	71	40661	59	40769	70	40864	56	40957	71
40175	48	40229	46	40507	71	40540	52	40663	59	40771	60	40882	72	40958	56
40175	57	40242	47	40508	52	40540	55	40665	59	40773	60	40891	56	40958	71
40177	48	40243	47	40509	52	40540	71	40667	59	40775	60	40891	71	40959	56

Book Index By Item Code

Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page
41022	73	41152	72	41205	71	41355	48	41546	54	41798	71	41906	74	43036	62
41023	73	41153	72	41206	55	41355	57	41547	54	41799	71	41907	74	43037	62
41024	73	41168	72	41206	71	41356	48	41548	54	41800	71	41908	74	43038	62
41031	60	41179	72	41207	55	41356	57	41613	52	41834	63	41909	74	43039	62
41032	60	41181	55	41207	71	41357	48	41614	52	41835	63	41910	74	43040	62
41033	60	41181	71	41208	55	41357	57	41615	52	41836	63	41911	74	43041	62
41034	60	41183	55	41208	71	41358	48	41616	52	41837	63	41912	74	43042	62
41035	60	41183	71	41213	61	41358	57	41617	52	41845	56	41913	74	43043	62
41041	60	41185	55	41214	61	41359	48	41618	52	41846	56	41914	74	43044	62
41042	60	41185	71	41215	61	41359	57	41619	52	41847	56	41915	74	43045	62
41043	60	41187	72	41216	61	41363	57	41623	52	41848	56	41916	74	43059	63
41044	60	41190	52	41218	61	41380	48	41624	52	41849	56	41917	74	5	50413
41045	60	41190	55	41219	61	41380	57	41628	52	41850	56	41918	74	50003	33
41046	60	41190	71	41220	61	41381	48	41629	52	41851	56	41919	74	50003	41
41047	60	41191	52	41276	53	41381	57	41630	52	41852	56	41920	74	50003	77
41048	60	41191	55	41277	53	41382	48	41631	52	41853	56	41921	74	50004	18
41050	60	41191	71	41278	53	41382	57	41632	52	41854	56	41922	74	50004	33
41054	60	41192	55	41279	53	41383	48	41633	52	41855	56	41923	74	50004	41
41055	60	41192	71	41283	53	41383	57	41634	52	41856	56	41924	74	50009	32
41055	72	41193	55	41284	53	41384	48	41642	52	41857	56	41925	74	50009	61
41056	62	41193	71	41285	53	41384	57	41643	52	41858	56	41926	74	50009	79
41057	62	41194	55	41286	53	41385	48	41709	52	41859	56	41927	74	50015	34
41058	60	41194	71	41287	53	41385	57	41712	54	41860	56	41928	74	50015	36
41067	53	41195	55	41288	53	41388	57	41713	54	41861	56	41929	74	50016	33
41068	60	41195	71	41289	53	41391	53	41714	54	41862	56	41930	74	50016	34
41077	63	41196	55	41290	53	41392	53	41715	54	41879	56	41931	74	50025	34
41078	63	41196	71	41291	53	41393	53	41716	54	41880	56	43018	63	50053	33
41089	72	41197	55	41292	53	41394	53	41737	54	41881	56	43019	63	50075	33
41097	72	41197	71	41294	53	41395	53	41738	54	41882	56	43020	63	50077	33
41098	72	41198	55	41296	53	41409	53	41739	54	41883	56	43021	63	50144	34
41099	72	41198	71	41298	53	41450	53	41740	54	41884	56	43022	62	50146	34
41107	72	41199	55	41314	53	41509	53	41741	54	41885	56	43023	62	50173	32
41115	60	41199	71	41315	53	41510	53	41776	70	41886	56	43024	62	50174	32
41116	60	41200	55	41316	53	41511	53	41777	63	41887	56	43025	62	50175	32
41117	60	41200	71	41319	53	41512	53	41778	62	41888	56	43026	62	50176	32
41118	60	41201	55	41326	53	41513	53	41785	71	41889	56	43027	62	50178	32
41119	60	41201	71	41327	53	41514	53	41786	71	41890	56	43028	62	50179	32
41123	72	41202	55	41328	53	41515	53	41788	71	41891	56	43029	62	50180	32
41124	72	41202	71	41329	53	41516	53	41792	71	41892	56	43030	62	50181	32
41126	72	41203	55	41341	53	41525	53	41793	71	41893	56	43031	62	50183	32
41138	72	41203	71	41342	53	41542	54	41794	71	41894	56	43032	62	50188	34
41139	72	41204	55	41351	53	41543	54	41795	71	41895	56	43033	62	50200	34
41148	72	41204	71	41354	48	41544	54	41796	71	41896	56	43034	62	50201	33
41149	72	41205	55	41354	57	41545	54	41797	71	41905	74	43035	62	50226	34

Book Index By Item Code

Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page
53234	59	54481	31	54529	31	54598	31	55552	33	71058	82	75575	81	80150	38
53235	59	54482	31	54530	31	54599	31	55554	33	71060	82	75576	81	80201	38
53236	59	54483	31	54531	31	54601	31	55555	33	71060	82	75778	82	80202	38
53237	59	54484	31	54532	31	54602	31	55556	33	71140	82	76469	79	80203	38
53238	59	54485	31	54533	31	54603	31	55561	33	71141	82	76470	79	80204	38
53255	59	54486	31	54534	31	54604	31	55562	33	71141	82	76472	79		
53256	59	54487	31	54535	31	54605	31	7		71164	82	76473	79	9	
53257	59	54488	31	54536	31	54606	31	70015	76	71168	82	76474	79	99112	88
53258	59	54489	31	54537	31	54607	31	70020	76	73131	81	8		99113	88
53259	59	54490	31	54538	31	54608	31	70023	76	73132	81	80011	38	99114	88
54002	32	54491	31	54539	31	54609	31	70028	76	73133	81	80012	38	99115	88
54003	32	54492	31	54540	31	54610	31	70030	76	73134	81	80013	38	99116	88
54005	32	54493	31	54541	31	54611	31	70034	76	73140	80	80014	38	99118	88
54006	32	54494	31	54542	31	54612	31	70045	76	73142	80	80015	38	99126	88
54010	34	54495	31	54543	31	54613	31	70046	76	73144	80	80016	38	99127	88
54030	33	54496	31	54544	31	54614	31	70047	76	73146	80	80017	38	99128	88
54111	32	54497	31	54545	31	54615	31	70050	76	73163	80	80018	38	99129	88
54112	32	54498	31	54546	31	54616	31	70051	76	73169	80	80019	38	99130	88
54113	32	54499	31	54547	31	54617	31	70056	76	73170	80	80020	38	99131	88
54114	32	54500	31	54549	31	54618	31	70057	76	73171	80	80021	38	99132	88
54115	32	54501	31	54550	31	54619	31	70058	76	73172	80	80022	38	99135	88
54116	32	54502	31	54551	31	54620	31	70060	76	73190	81	80023	38	99136	88
54117	32	54503	31	54552	31	54621	31	70061	76	73191	81	80024	38	99141	88
54118	32	54504	31	54553	31	54622	31	70064	76	73192	81	80025	38	99146	88
54119	32	54505	31	54554	31	54624	31	70065	76	73193	81	80026	38	99151	88
54120	32	54506	31	54555	31	54626	33	70066	76	74389	81	80027	38	99152	88
54121	32	54507	31	54556	31	54627	33	70067	76	74390	81	80028	38	99153	88
54148	32	54508	31	54557	31	54628	33	70110	76	74391	81	80038	39	99154	88
54149	32	54509	31	54558	31	54629	33	70111	76	74457	81	80039	39	99156	88
54150	32	54510	31	54559	31	54631	33	70112	76	74458	81	80040	39	99157	88
54151	32	54513	31	54560	31	54633	32	70113	76	74459	81	80041	39	99158	88
54152	32	54514	31	54566	31	54634	32	70114	76	74558	80	80042	39	99159	88
54153	32	54515	31	54586	31	54635	32	70170	76	74559	80	80043	39	99160	88
54154	32	54516	31	54587	31	54715	31	70171	76	74560	80	80044	39	99161	88
54155	32	54517	31	54588	31	54765	31	70172	76	74561	80	80045	39	99162	88
54156	32	54518	31	54589	31	55541	33	70174	76	74562	80	80075	38	99163	88
54157	32	54519	31	54590	31	55542	33	70175	76	74563	80	80076	38	99164	88
54158	32	54520	31	54591	31	55543	33	70176	76	74564	80	80078	39	99168	88
54473	31	54521	31	54592	31	55544	33	70178	76	74565	80	80079	39	99169	88
54476	31	54522	31	54593	31	55545	33	70179	76	75570	81	80090	39	99170	88
54477	31	54523	31	54594	31	55546	33	71052	82	75571	81	80099	38	99171	88
54478	31	54524	31	54595	31	55547	33	71055	82	75572	81	80100	38	99172	88
54479	31	54525	31	54596	31	55548	33	71057	82	75573	81	80110	38	99173	88
54480	31	54528	31	54597	31	55549	33	71058	82	75574	81	80111	38	99174	88
						55551	33								

Book Index By Item Code

Item Code	Page	Item Code	Page	Item Code	Page
99346	89	99523	84	99593	84
99347	89	99525	84	99594	84
99348	89	99529	84	99597	84
99350	89	99531	84	99598	84
99351	89	99535	84	99599	84
99352	89	99536	84	99600	84
99353	89	99537	85	99601	84
99354	89	99538	85	99626	85
99355	89	99539	85	99627	85
99356	89	99541	85	99648	84
99357	89	99542	85	99690	85
99359	89	99543	85	99800	86
99360	89	99544	85	99811	86
99361	89	99546	85	99812	86
99364	89	99547	85	99813	86
99365	89	99548	85	99818	86
99369	89	99551	85	99832	87
99371	89	99552	85	99844	87
99372	89	99553	85	99855	87
99373	89	99554	85	99860	87
99374	89	99555	85	99861	87
99500	84	99556	85	99932	89
99501	84	99560	85	99933	89
99502	84	99563	85	99934	89
99503	84	99565	84	99935	89
99504	84	99566	85	99936	89
99505	84	99569	85	99937	89
99506	84	99570	84	99938	89
99507	84	99571	84	99939	89
99508	84	99572	85	99959	84
99509	84	99573	85	99960	84
99510	84	99576	84	99961	84
99511	84	99577	84	99966	86
99512	84	99578	84	99967	86
99513	84	99579	84	99968	86
99514	84	99580	84	99969	86
99515	84	99581	84	99982	86
99516	84	99582	84	99983	86
99517	84	99583	84	99984	86
99518	84	99586	84	99985	86
99519	84	99589	84	99987	86
99520	84	99590	84	99996	87
99521	84	99591	84		
99522	84	99592	84		



Partners in Productivity

2525 Wisconsin Avenue, Downers Grove, Illinois 60515

Phone: 1-630-971-0150 Fax: 1-630-971-1180

www.flexco.com